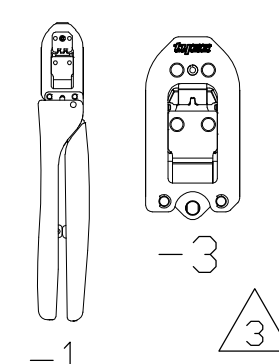



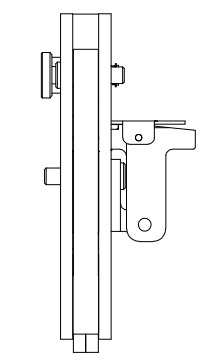

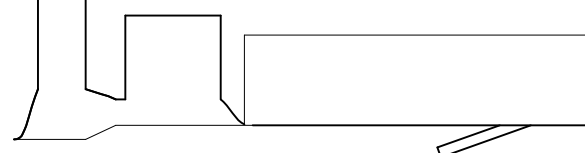



USED ON												
TOOL NUMBER 	WIRE SIZE mm ² [AWG] 	INSULATION DIAMETER mm [in.] 	INSULATION ADJUSTER 	FLIP LOCATOR 	STRIP LENGTH mm [in.] 	CRIMP HEIGHT mm [in.] 	CONTACT PART NUMBERS 				CONTACT DESCRIPTION	APPLIC. SPECIFIC.
							LOOSE PIECE 		STRIP FORM 			
91509-1 91509-3	0.50-0.89 [20-18] 1.25-1.42 [16]	2.29-3.30 [.090-.130]	YES	NO	4.75 ± 0.38 [.187 ± .015]	1.27 ± 0.05 [.050 ± .002] 1.52 ± 0.08 [.060 ± .003]	42566-[] 60196-3 62228-1 42638-2	62228-1	42452-[] 60196-[] 62026-1 60214-[] 60621-1	61084-1 61758-[] 61919-1 61939-1 62137-[]	187 FASTON Contacts	114-2036 and 114-35000
91511-1 91511-3	0.20-0.38 [24-22] 0.32-0.96 [22-18]	1.02-1.52 [.040-.060] 1.52-2.54 [.060-.100]	NO	NO	4.75 ± 0.38 [.187 ± .015]	0.76 ± 0.05 [.030 ± .002] 1.14 ± 0.05 [.045 ± .002]	- 42922-[]		42067-[] 42415-[] 42635-[]		110 FASTON Contacts	114-2036 and 114-35000
91514-1 91514-3	0.32-0.96 [22-18]	1.52-2.54 [.060-.100] 2.29-3.30 [.090-.130]	YES	NO	6.35 ± 0.38 [.250 ± .015]	1.40 ± 0.10 [.055 ± .004]	41969-[] 42731-[] 60878-2 61316-1 170187-[]		41772-[] 42640-[] 60294-2 170183-[]		250 FASTON contacts	114-2036 and 114-35000
91581-1 91581-3	0.50-0.85 [20-18]	2.03-3.05 [.080-.120]	NO	NO	4.5 ± 0.38 [.177 ± .015]	0.97-1.10 [.038-.043] 1.42-1.55 [.056-.061]	170042-[] 172799-[] 170041-[]		170015-[] 170033-[] 170014-[]		110 FASTON Contacts	114-2036 and 114-35000
91593-1 91593-3	0.51-0.89 [20-18] 1.25-1.38 [16]	1.90-3.00 [.075-.118] 2.40-3.40 [.094-.134]	YES	NO	4.50 ± 0.50 [.177 ± .020]	1.10-1.24 [.043-.049] 1.35-1.54 [.053-.061]	170331-[]		170325-[]		187 POSITIVE LOCK FASTON Contacts	114-5041
2031929-1 2031929-3	0.32-0.96 [22-18]	1.52-2.54 [.060-.100]	NO	NO	4.75 ± 0.38 [.187 ± .015]	1.14 ± 0.05 [.045 ± .002]	42470-[]		42068-[]		110 FASTON Contacts	114-2036 and 114-35000
2063247-1 2063247-3	0.31-0.56 (22-20) 0.76-0.89 (18)	2.03-2.65 (.080-.104) 2.13-3.05 (.084-.120)	YES	NO	4.78 ± 0.38 (.188 ± .015)	1.37 ± 0.05 (.054 ± .002) 1.57 ± 0.05 (.062 ± .002)	-		42490-[]		187 FASTON Contacts	114-2036
2063846-1 2063846-3	0.20-0.38 [24-22] 0.32-0.96 [22-18]	1.02-1.52 [.040-.060] 1.52-2.54 [.060-.100]	NO	NO	4.75 ± 0.38 [.187 ± .015]	0.76 ± 0.05 [.030 ± .002] 1.14 ± 0.05 [.045 ± .002]	61454-1 42470-[]		42067-[] 42415-[] 42068-[]		110 FASTON Contacts	114-2036 and 114-35000

① LIST OF APPLIED CONTACT PART NUMBERS
MAY NOT BE COMPLETE AND IS SUBJECT
TO CHANGE. FOR CURRENT INFORMATION
ON TERMINAL PART NUMBERS, CONTACT
THE TOOLING ASSISTANCE CENTER :
1-800-722-1111.

2. AMP, CERTI-CRIMP, and FASTON
ARE TRADEMARKS.


△₃ -1 IS A CERTICRIMP II HAND TOOL ASSEMBLY.
-3 IS A CERTICRIMP II HEAD SUB-ASSEMBLY.

4. THE HAND TOOL INSTRUCTION SHEET, ALSO KNOWN AS AN "IS", FOR MOST CERTI-CRIMP II TOOLS USE IS 408-8547. IF THE TOOL HAS A FLIP LOCATOR USE IS 408-10414.

CERTI-CRIMP II DATA SHEET										
			DWN M. YOUNGER		21FEB2012		MATERIAL -		HEAT TREAT -	
			CHK B.A.WOLFE		22FEB2012					
			APVD B.A. WOLFE		22FEB2012				TE Connectivity	
DIMENSIONS: mm			TOLERANCES UNLESS OTHERWISE SPECIFIED:							
			0 PLC		± -					
			1 PLC		± -					
			2 PLC		± -					
			3 PLC		± -					
			4 PLC		± -					
NAME			CERTI-CRIMP II TOOL DATA SHEET FASTON & POSITIVE LOCK CONTACT FAMILY							
ANGLES±		-	SCALE		SIZE	DRAWING NO		SHEET		REV
SURFACE TEXTURE		√	-		A1	1583005		1 OF 2		D5

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS CORPORATION AND ITS WORLDWIDE SUBSIDIARIES AND AFFILIATES ("TE"). IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN TE PERSONNEL, WITHOUT AUTHORIZATION FROM TE. (www.TE.com).

- ① LIST OF APPLIED CONTACT PART NUMBERS MAY NOT BE COMPLETE AND IS SUBJECT TO CHANGE. FOR CURRENT INFORMATION ON TERMINAL PART NUMBERS, CONTACT THE TOOLING ASSISTANCE CENTER : 1-800-722-1111.
2. AMP, CERTI-CRIMP, and FASTON ARE TRADEMARKS.
- ③ -1 IS A CERTICRIMP II HAND TOOL ASSEMBLY.
-3 IS A CERTICRIMP II HEAD SUB-ASSEMBLY.
4. THE HAND TOOL INSTRUCTION SHEET, ALSO KNOWN AS AN "IS", FOR MOST CERTI-CRIMP II TOOLS USE IS 408-8547. IF THE TOOL HAS A FLIP LOCATOR USE IS 408-10414.

CERTI-CRIMP II DATA SHEET												
DIMENSIONS: mm 			DWN M. YOUNGER		21FEB12		MATERIAL -		HEAT TREAT -			
			D/C B.A. WOLFE		22FEB12							
			APVD B.A. WOLFE		22FEB12		 TE Connectivity					
NAME												
ANGLES± -			CERTI-CRIMP II TOOL DATA SHEET									
			FASTON & POSITIVE LOCK CONTACT FAMILY									
SURFACE TEXTURE 			SCALE -		SIZE A1		DRAWING NO 1583005		SHEET 2 OF 2		REV D5	

		SEE SHEET 1		-	-	-
P	LTR	REVISION RECORD		DATE	DWN	APVD

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2063247-1](#)