

Normality	8 7 6	5 4 3 2 1
A SO BASE DAMPLES CASE AND ADDRESS OF THE LOSS CASE AND ADDRESS OF THE LOSS	DESCRIPTION MATERIAL FINISH BODY BRASS NICKEL SOCKET BeCu GOLD INSULATION PTFE N/A	REVISIONS REV DESCRIPTION DATE APPV B UPDATED FOOTPRINT AND DIMENSIONS; ADDED NEW 29-JUN-12 SAH C ADDED DIMPLE TO PART 3-JUN-13 SAH
c c c c c c c c c c c c c c	THREADS 4X Ø 0.018 DIMPLE(S) EQUALLY SPACED 0.250 [6.35] 0.453	RECOMMENDED
B S S S S S S S S S S S S S	C $[3.90]$ 0.053 [1.35] $0.053[1.35]$ $[1.35]$	$\begin{array}{c} 0.160 \\ 0.060 \\ 1.52 \end{array} \xrightarrow{0.160} 0.060 \\ 1.52 \end{array} \xrightarrow{0.160} 0.060 \\ 1.52 \end{array} \xrightarrow{0.160} 0.100 \\ 1.52 \end{array} \xrightarrow{0.160} 0.100 \\ 1.52 \end{array}$
A BACK VIEW A BACK	0.140	
A BACK VIEW BACK VIEW BAC	Ø 0.312 [7.93] (1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 -	
A BACK VIEW BACK	0.157 [4.00] 0.240	1. ALL DIMENSIONS ARE IN INCHES [mm]. 2. DIMENSIONS APPLY AFTER FINISHING. 3. MANUFACTURE TO BE COMPLIANT WITH EU ROHS DIRECTIVE. 4. SAFETY BREAK ALL SHARP CORNERS AND EDGES .02 MAXIMUM. WARNING: THIS DRAWING CONTAINS PROPRIETARY INFORMATION 159 ORT LANE
	BACK VIEW	THAT IS THE SOLE PROPERTY OF LINX TECHNOLOGIES, AND SHALL BE TREATED AS SUCH. NO DISCLOSURE OR REPRODUCTION OF THIS DOCUMENT IS PERMITTED, IN WHOLE OR IN PART, WITHOUT THE EXPRESS WRITTEN PERMISSION OF LINX TECHNOLOGIES OR ITS DESIGNATED AGENTS. MERLIN, OR 97532 A MATERIAL: INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5. PROJECTION: DESIGNATED AGENTS. REV CONSMA003.031 REV CONSMA003.031 C



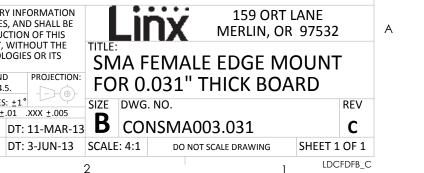

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Linx Technologies: