
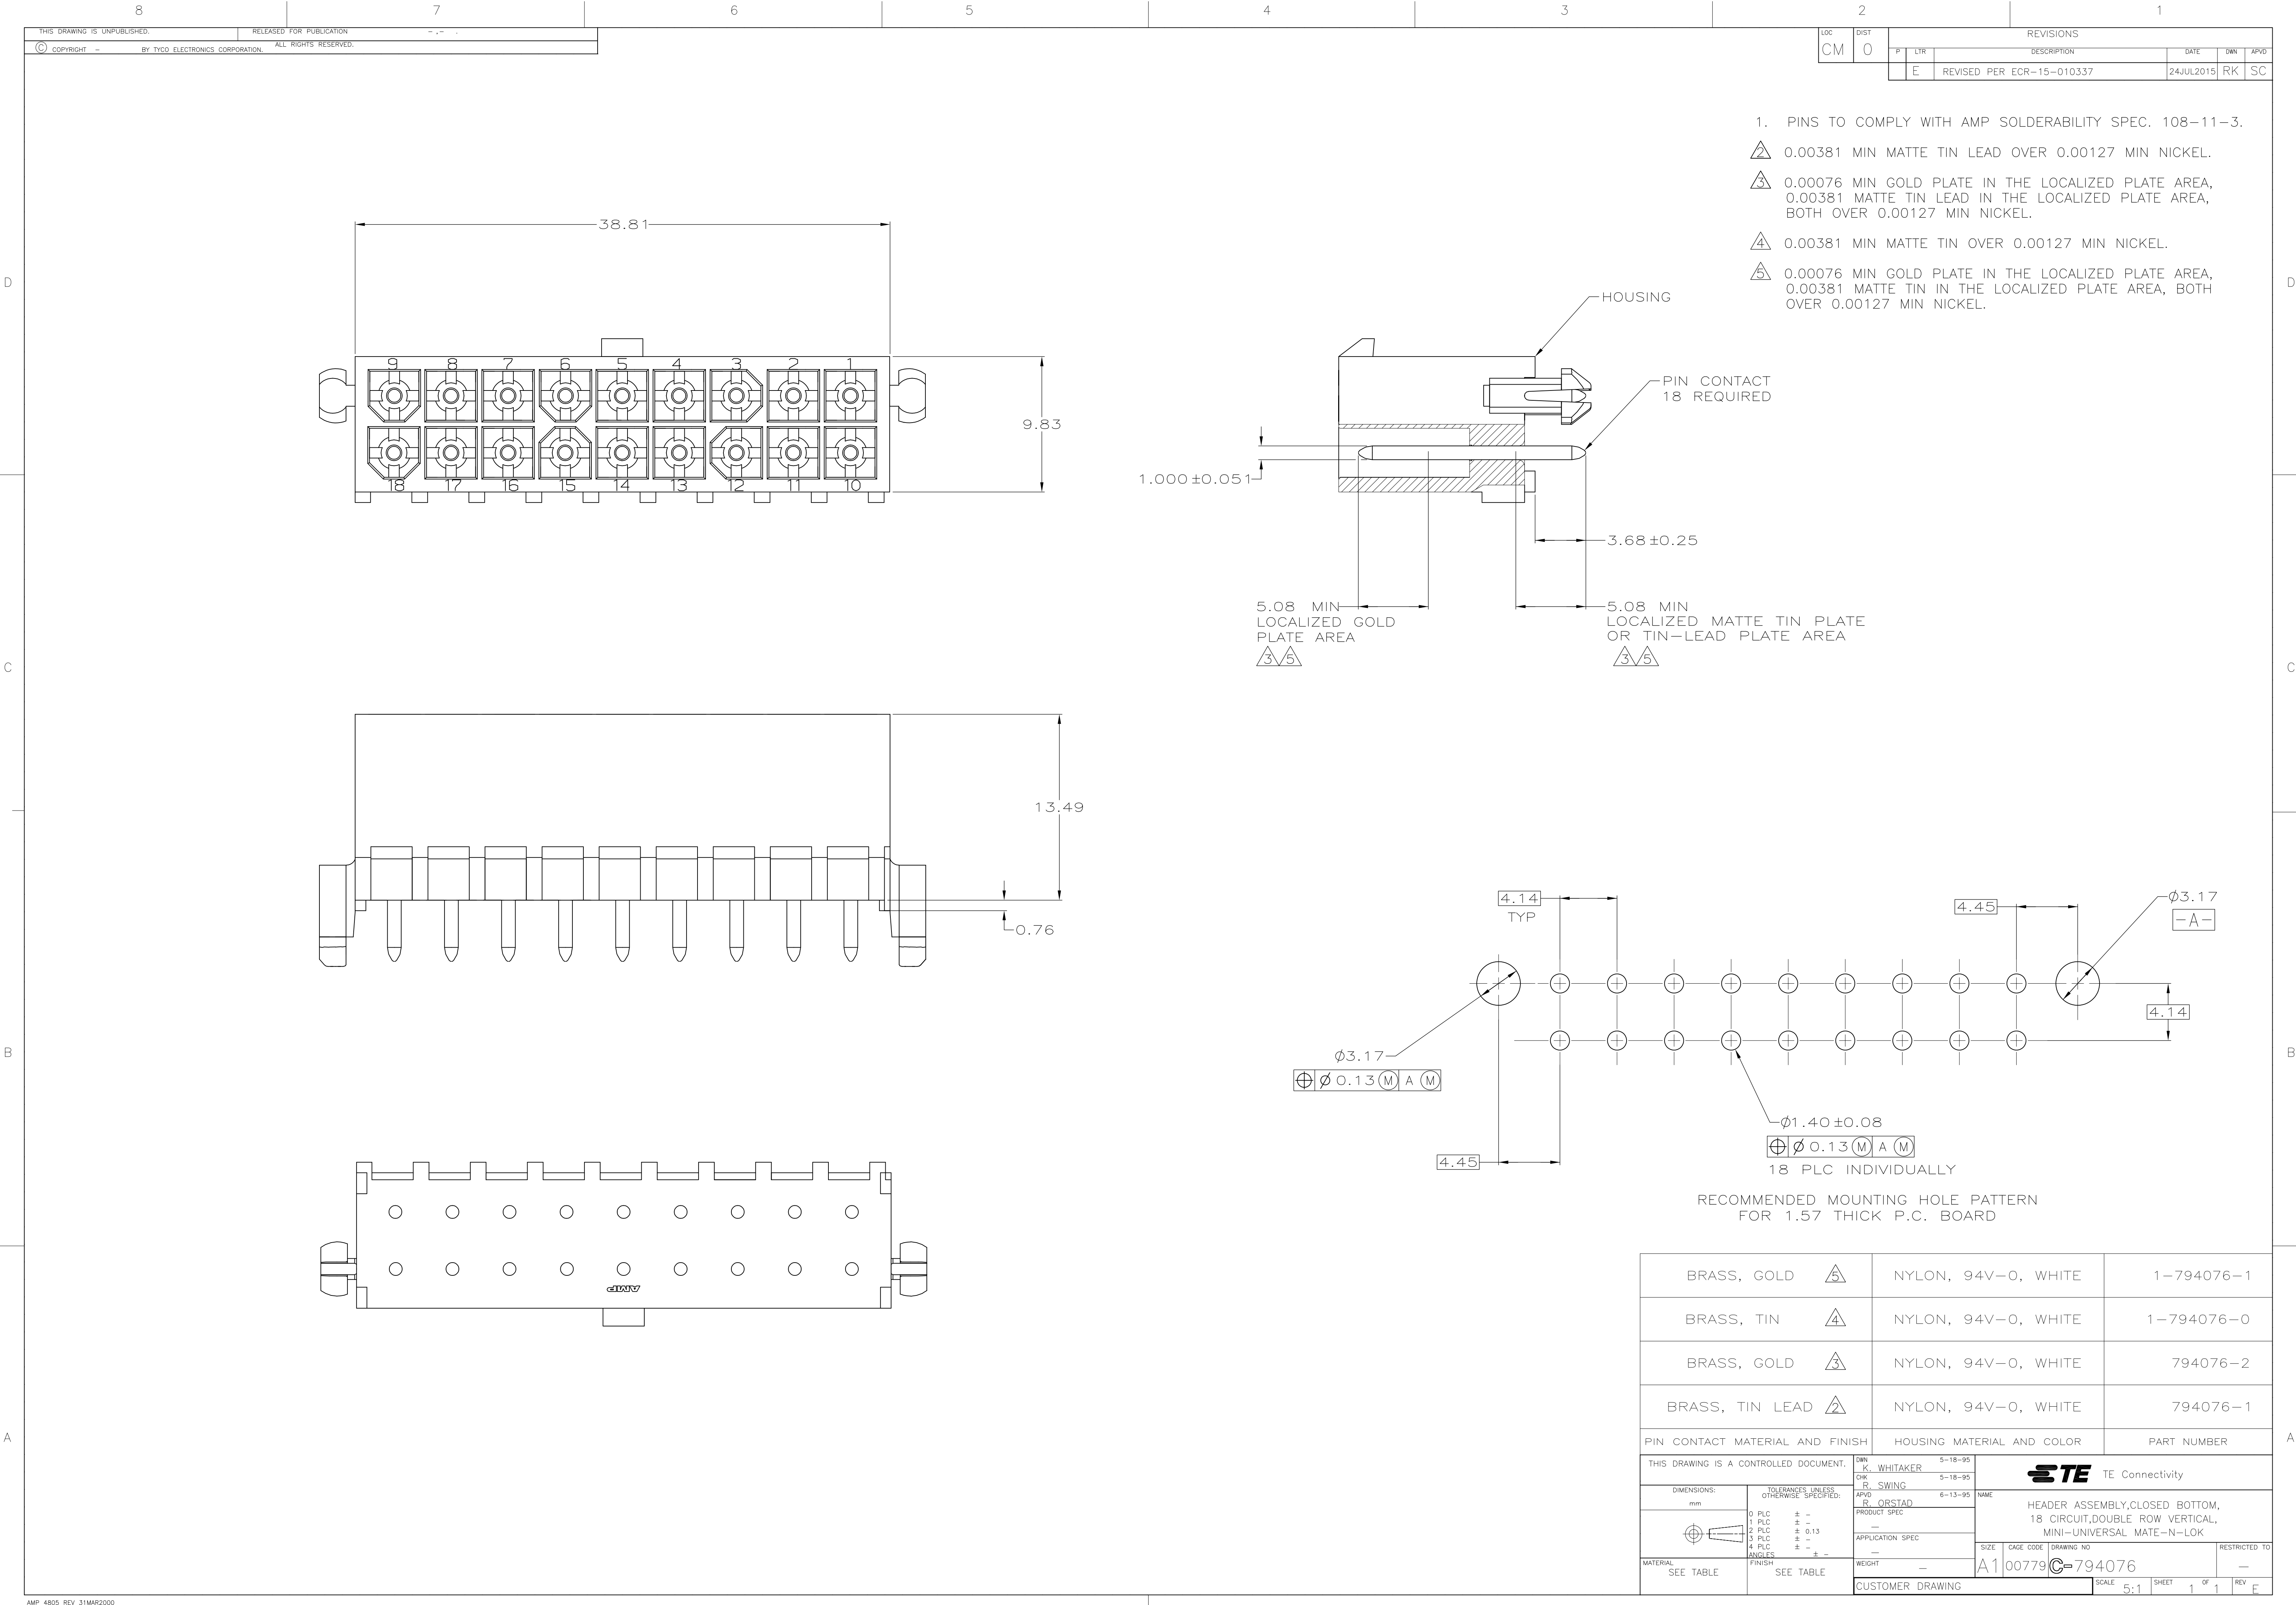




1. PINS TO COMPLY WITH AMP SOLDERABILITY SPEC. 108-11-3.
- 0.00381 MIN MATTE TIN LEAD OVER 0.00127 MIN NICKEL.
- 0.00076 MIN GOLD PLATE IN THE LOCALIZED PLATE AREA, 0.00381 MATTE TIN LEAD IN THE LOCALIZED PLATE AREA, BOTH OVER 0.00127 MIN NICKEL.
- 0.00381 MIN MATTE TIN OVER 0.00127 MIN NICKEL.
- 0.00076 MIN GOLD PLATE IN THE LOCALIZED PLATE AREA, 0.00381 MATTE TIN IN THE LOCALIZED PLATE AREA, BOTH OVER 0.00127 MIN NICKEL.

RECOMMENDED MOUNTING HOLE PATTERN FOR 1.57 THICK P.C. BOARD			
BRASS, GOLD 		NYLON, 94V-0, WHITE	1-794076-1
BRASS, TIN 		NYLON, 94V-0, WHITE	1-794076-0
BRASS, GOLD 		NYLON, 94V-0, WHITE	794076-2
BRASS, TIN LEAD 		NYLON, 94V-0, WHITE	794076-1
PIN CONTACT MATERIAL AND FINISH		HOUSING MATERIAL AND COLOR	PART NUMBER
THIS DRAWING IS A CONTROLLED DOCUMENT.			
DIMENSIONS: mm 		DWG K. WHITAKER 5-18-95 CHK R. SWING 5-18-95	
		APPROVED R. ORSTAD 6-13-95 PRODUCT SPEC APPLICATION SPEC	
MATERIAL SEE TABLE		NAME HEADER ASSEMBLY,CLOSED BOTTOM, 18 CIRCUIT,DOUBLE ROW VERTICAL, MINI-UNIVERSAL MATE-N-LOK	
		SIZE CAGE CODE DRAWING NO A1 00779 C-794076	
FINISH SEE TABLE		RESTRICTED TO —	
CUSTOMER DRAWING SCALE 5:1 SHEET 1 OF 1 REV E			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-794076-0](#)