

PHYSICAL PROPERTIES:
HOUSING MATERIAL: THERMOPLASTIC, PC
FLAMABILITY: UL94V-0
COLOR: BLACK

TERMINAL:
TERMINALS: BRASS, TIN PLATED
SCREWS: 6-32 STEEL, NICKEL PLATED

MECHANICAL:
PITCH: .437
WIRE RANGE: 14-22 AWG
RECOMMENDED TIGHTENING TORQUE: 12IN-LB

ELECTRICAL PROPERTIES:
MAX CURRENT: 25A
OPERATING VOLTAGE: 300V

ENVIRONMENTAL PROPERTIES:
OPERATING TEMP: -40°C TO 120°C

- 1


SEE FIGURE.
- 2

PRELIMINARY PART NUMBER.
- 3

STAINLESS STEEL SCREWS.
- 4

WHITE INK STAMP.
- 5

TE CONNECTIVITY LOGO LOCATED APPROXIMATE AREA.

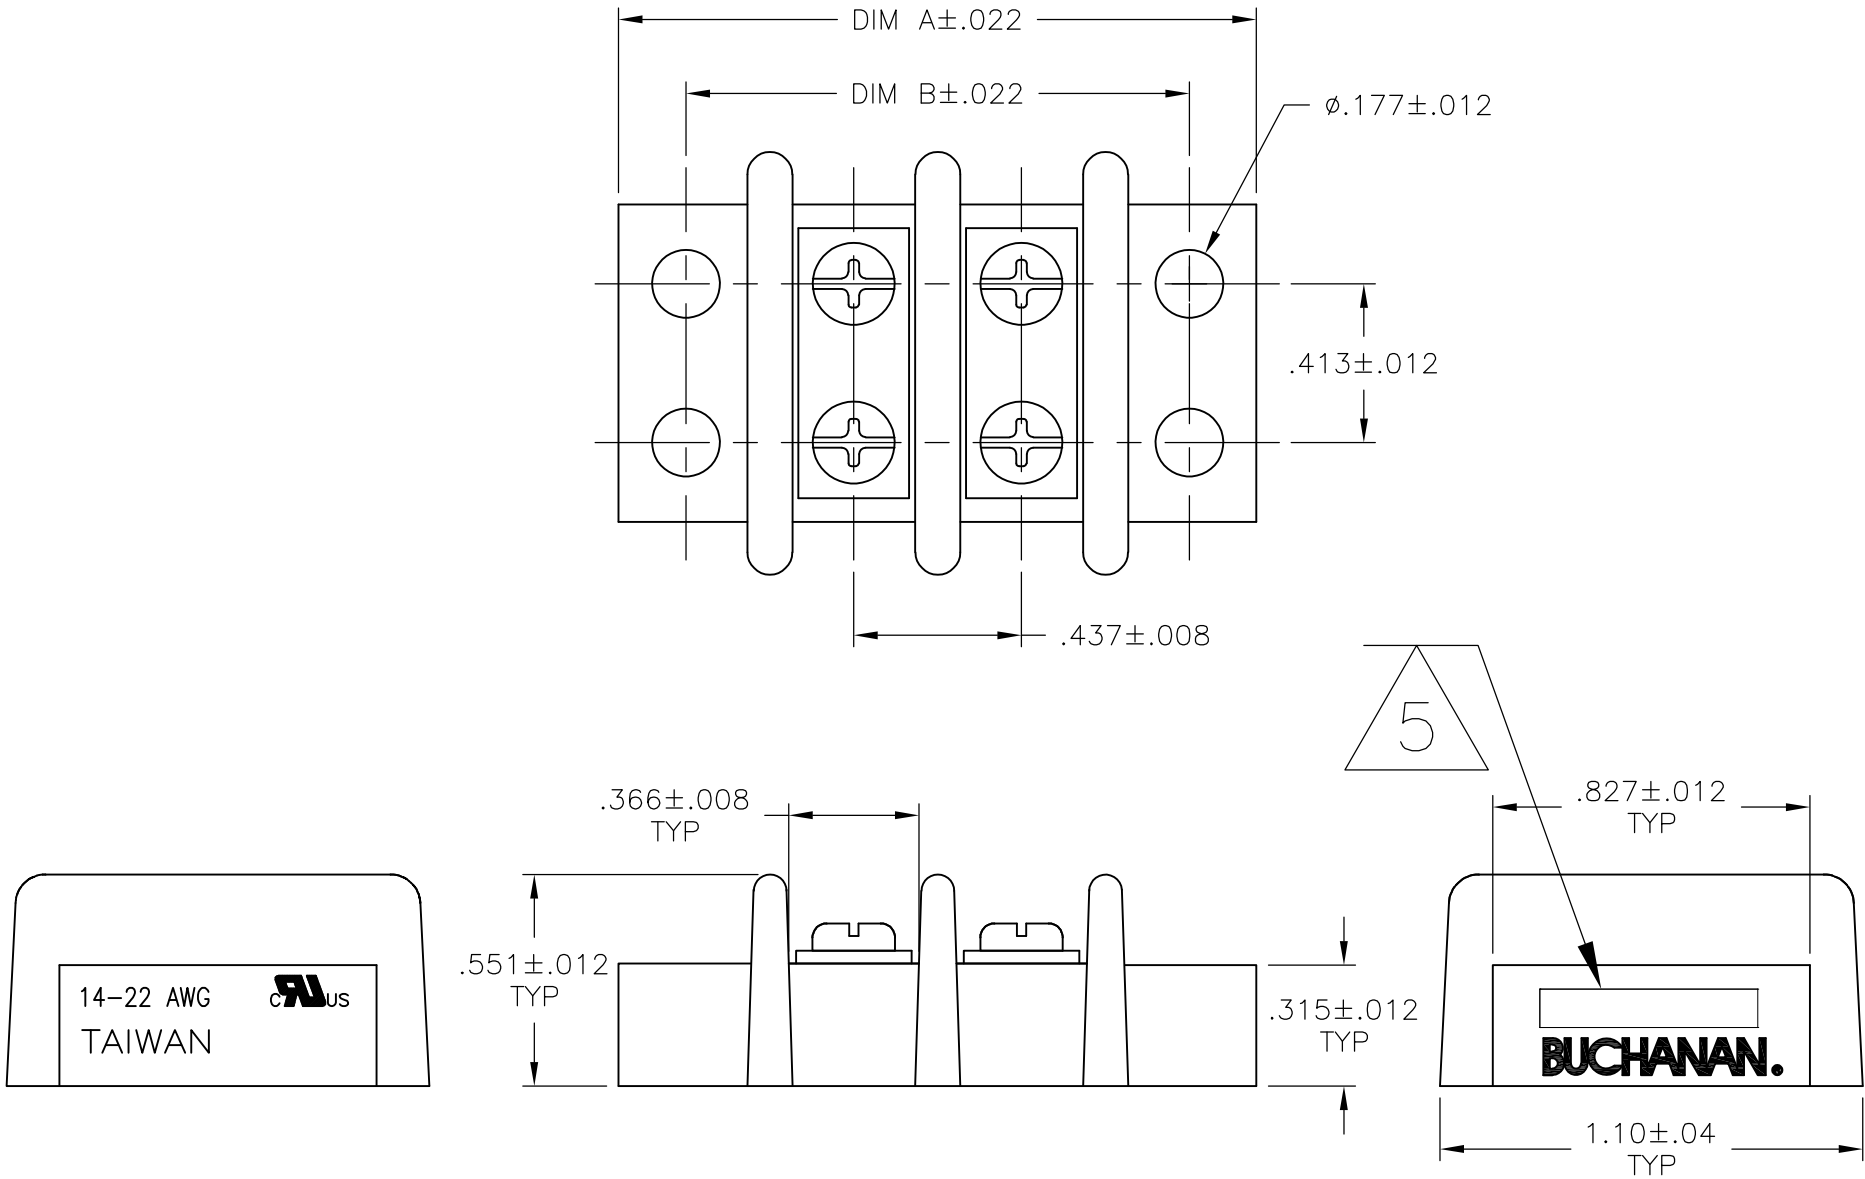


	5.646	5.992	12	4-1546670-2
	9.142	9.488	20	2-1546670-0
	8.705	9.051	19	1-1546670-9
2	8.268	8.614	18	3-1546670-0
	8.268	8.614	18	1-1546670-8
	7.831	8.177	17	1-1546670-7
	7.394	7.740	16	1-1546670-6
	6.957	7.303	15	1-1546670-5
	6.520	6.866	14	1-1546670-4
	6.083	6.429	13	1-1546670-3
	5.646	5.992	12	1-1546670-2
	5.209	5.555	11	1-1546670-1
4 2 1	4.772	5.118	10	4-1546670-3
2 1	4.772	5.118	10	3-1546670-8
	4.772	5.118	10	1-1546670-0
2 1	4.335	4.681	9	3-1546670-5
2 1	4.335	4.681	9	3-1546670-2
	4.335	4.681	9	1546670-9
1	3.898	4.244	8	4-1546670-1
3 2	3.898	4.244	8	3-1546670-6
2 1	3.898	4.244	8	3-1546670-4
2 1	3.898	4.244	8	3-1546670-3
	3.898	4.244	8	1546670-8
	3.461	3.807	7	1546670-7
1	3.024	3.370	6	3-1546670-1
	3.024	3.370	6	1546670-6
1	2.587	2.933	5	2-1546670-8
1	2.587	2.933	5	2-1546670-7
	2.587	2.933	5	1546670-5
2 1	2.496	2.933	4	3-1546670-9
1	2.150	2.496	4	2-1546670-9
	2.150	2.496	4	1546670-4
	1.713	2.059	3	1546670-3
	1.276	1.622	2	1546670-2
	DIM B	DIM A	NO OF POS	PART NUMBER


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHEGEL	4/4/03	 TE Connectivity				
DIMENSIONS: INCHES		CHK C RICHARD	4/4/03					
	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± .01 3 PLC ± .005 4 PLC ± - ANGLES ± 3°	APVD C RICHARD	4/4/03	NAME DOUBLE ROW BARRIER STRIP W/ BINDING HD SCREW, .437 SPACING				
		PRODUCT SPEC —						
		APPLICATION SPEC —		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
		MATERIAL —	FINISH —	WEIGHT —	A2	00779	C-1546670	—
		CUSTOMER DRAWING				SCALE NTS	SHEET 1 of 3	REV K18

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
FT	0		—	SEE SHEET 1	—	—	—


DOUBLE SIDED, DOUBLE HOLE
QC TAB, QTY 5

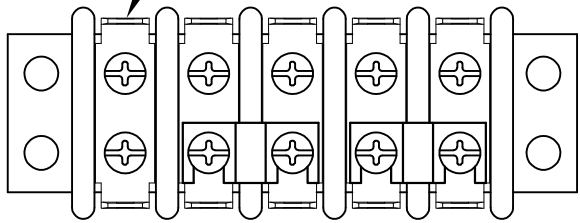

DOUBLE SIDED, DOUBLE HOLE
QC TAB, QTY 5

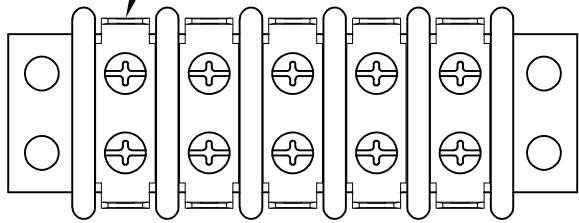


JUMPER, QTY 1


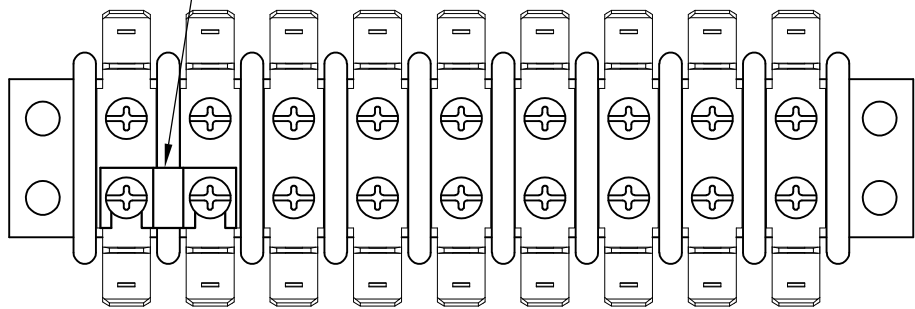


DOUBLE SIDED, DOUBLE HOLE
45° QC TAB, QTY 9



DOUBLE SIDED, DOUBLE HOLE
90° QC TAB, QTY 9

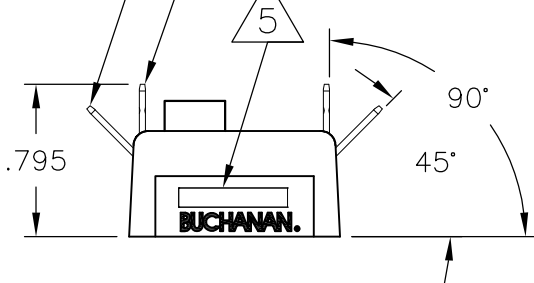

JUMPER QTY 2

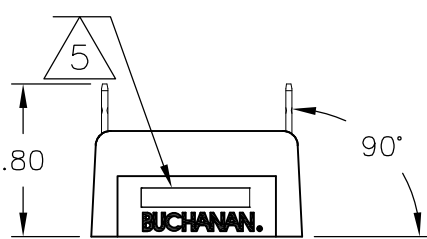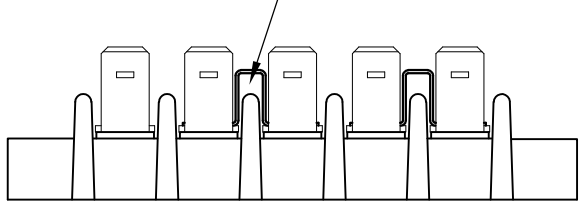

.250
TYP

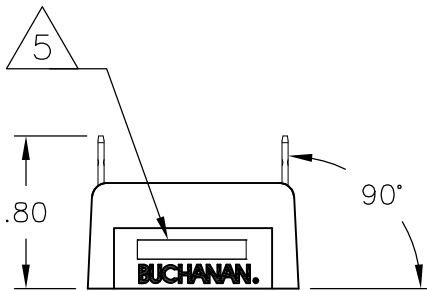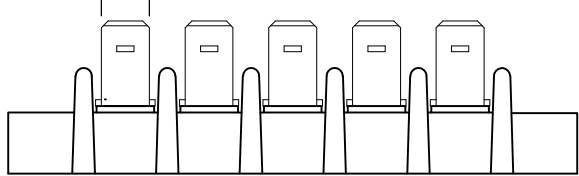


2-1546670-7



2-1546670-8

3-1546670-2

DOUBLE SIDED, DOUBLE HOLE
QC TAB, QTY 5

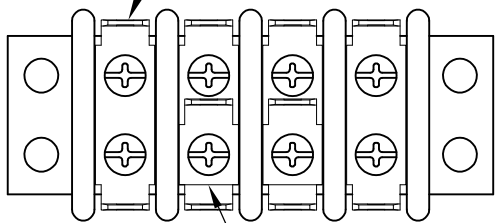


SINGLE SIDED, SINGLE HOLE
QC TAB, QTY 2

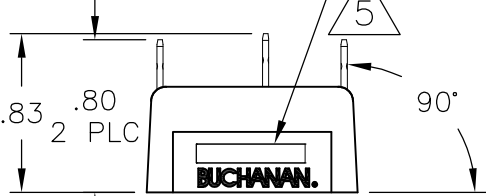
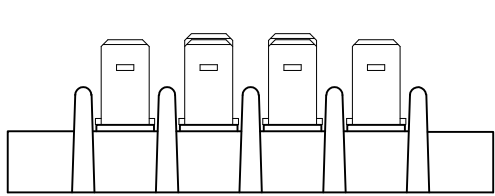


2-1546670-9

SINGLE SIDED, DOUBLE HOLE
QC TAB, QTY 6

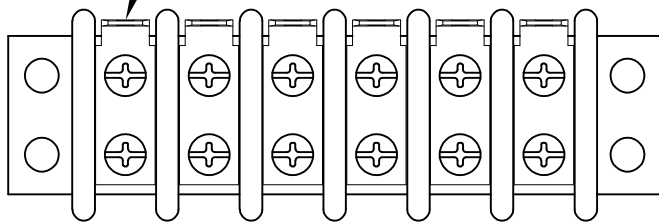


.250
TYP

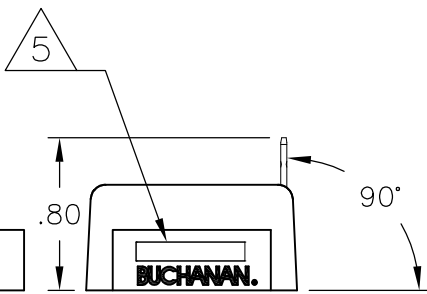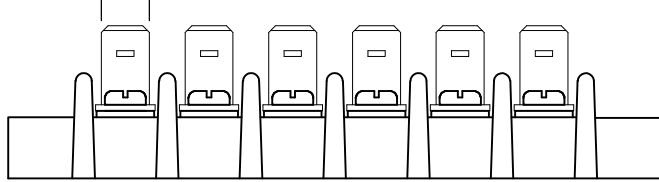

3-1546670-1


DOUBLE SIDED, DOUBLE HOLE
FLAT QC TAB, QTY 8.

JUMPER, QTY 2

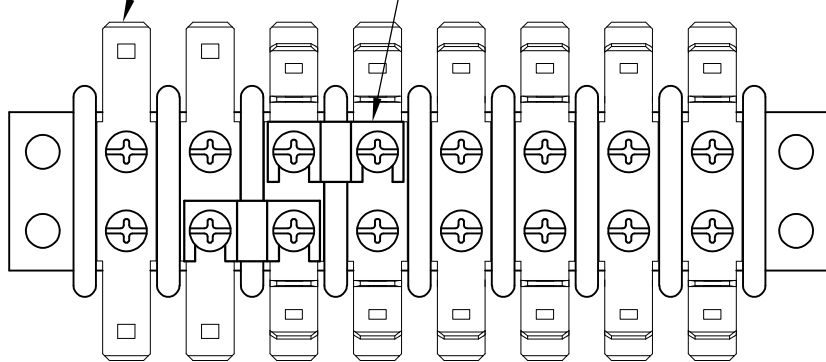


DOUBLE SIDED, DOUBLE HOLE
45° QC TAB, QTY 6

DOUBLE SIDED, DOUBLE HOLE
90° QC TAB, QTY 4


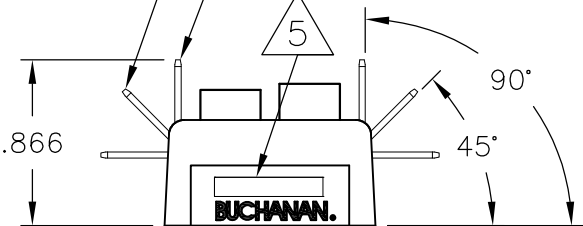


3-1546670-3

SINGLE SIDED, DOUBLE HOLE
QC TAB, QTY 18


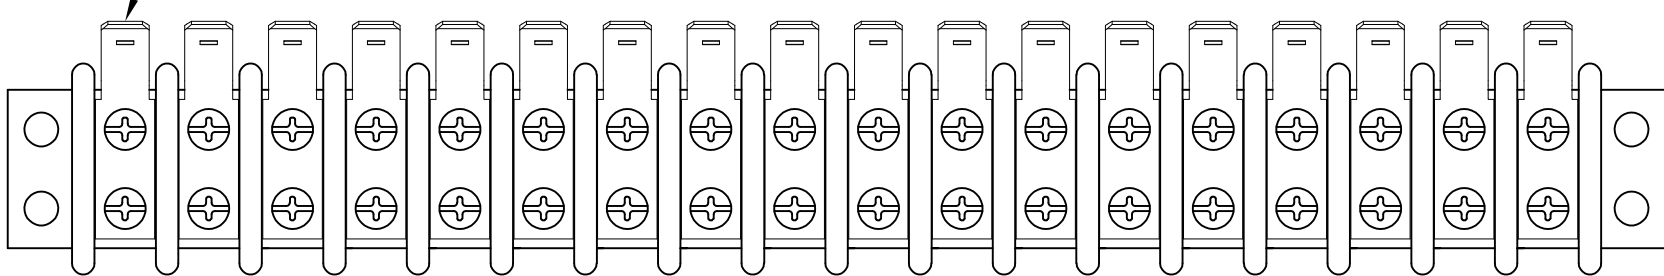


.250
TYP

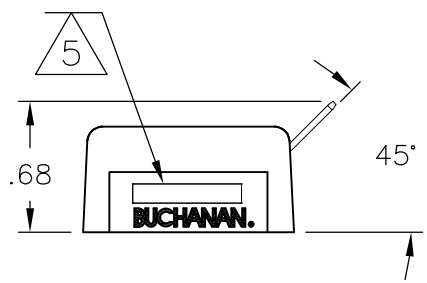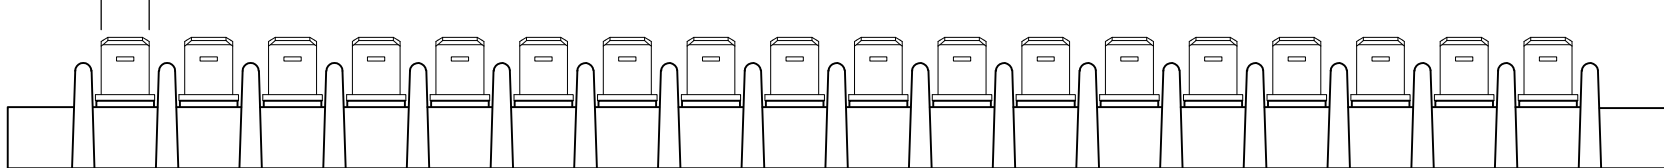

3-1546670-0

DOUBLE SIDED, DOUBLE HOLE
FLAT QC TAB, QTY 8.

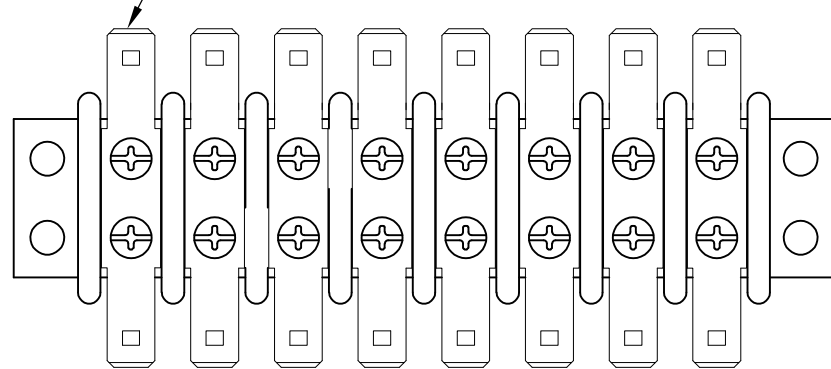

3-1546670-4

11.764	12.110	26	2-1546670-6
11.327	11.673	25	2-1546670-5
10.90	11.236	24	2-1546670-4
10.453	10.799	23	2-1546670-3
10.016	10.362	22	2-1546670-2
9.579	9.925	21	2-1546670-1
9.142	9.488	20	3-1546670-7
DIM B	DIM A	NO OF POS	PART NUMBER



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHEGEL	4/4/03	 TE Connectivity						
		CHK C RICHARD	4/4/03							
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD C RICHARD	4/4/03	NAME DOUBLE ROW BARRIER STRIP W/ BINDING HD SCREW, .437 SPACING						
	0 PLC ± -	PRODUCT SPEC								
	1 PLC ± -	-								
	2 PLC ± .01	APPLICATION SPEC								
	3 PLC ± .005	-								
4 PLC ± -			SIZE	CAGE CODE	DRAWING NO		RESTRICTED TO			
MATERIAL	FINISH	WEIGHT	A2	00779	C=1546670					
-	-	CUSTOMER DRAWING		SCALE	NTS		SHEET	2 of 3	REV	K18

LOC	DIST	REVISIONS					
FT	0	P	LTR	DESCRIPTION	DATE	DWN	APVD
			—	SEE SHEET 1	—	—	—

D


DOUBLE SIDED, DOUBLE HOLE
FLAT QC TAB, QTY 9.

JUMPER, QTY 1

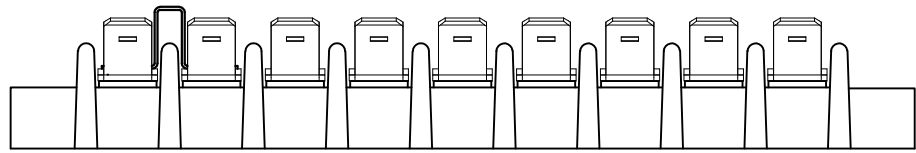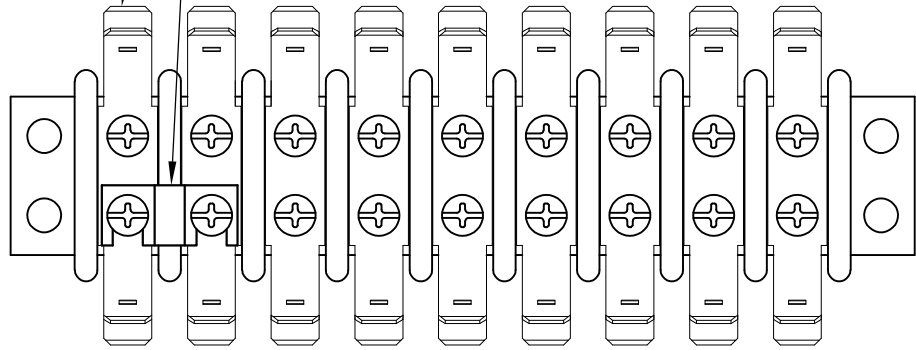


3-1546670-5

DOUBLE SIDED, DOUBLE HOLE
45° QC TAB, QTY 9

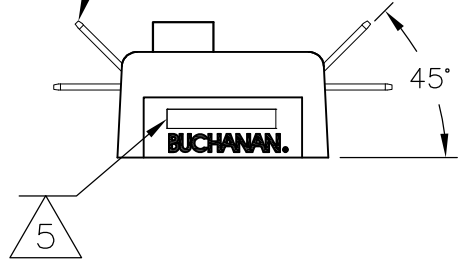


C

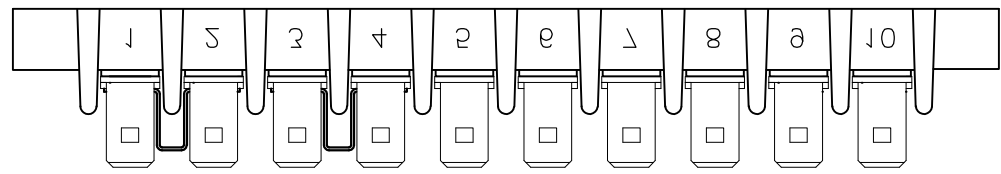


SINGLE SIDED, DOUBLE HOLE
45° QC TAB, QTY 10

SINGLE SIDED, DOUBLE HOLE
90° QC TAB, QTY 10

JUMPER, QTY 4

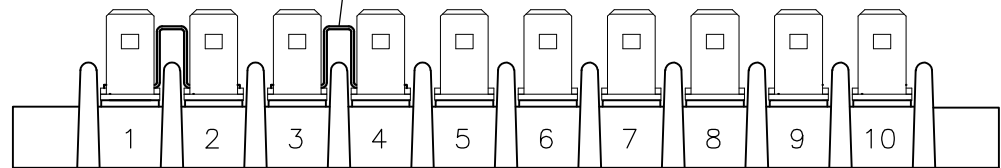


4-1546670-3

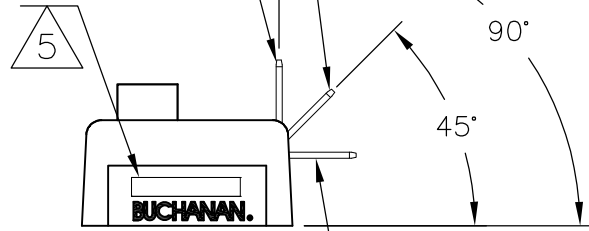


SINGLE SIDED, DOUBLE HOLE
FLAT QC TAB, QTY 10


B

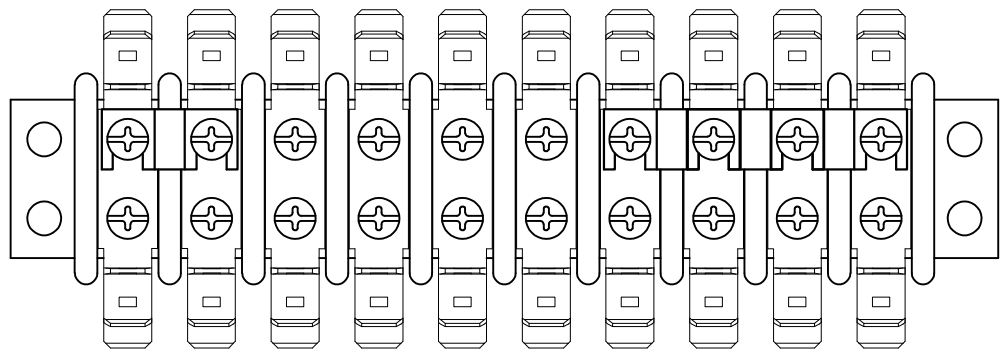



3-1546670-8

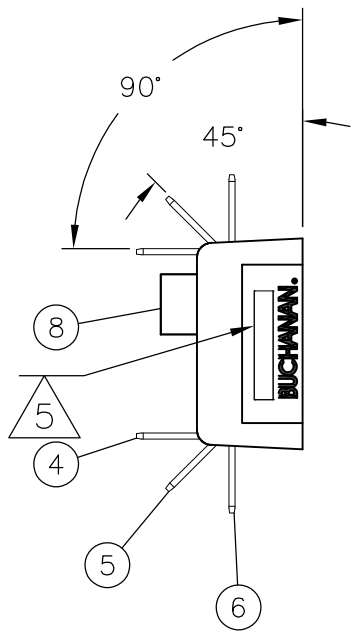


A

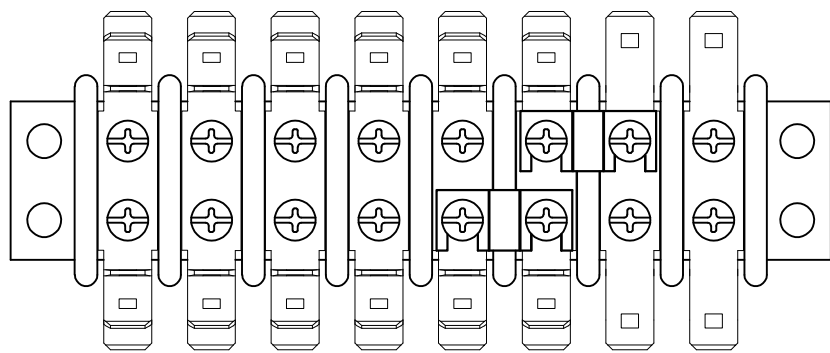

4-1546670-1

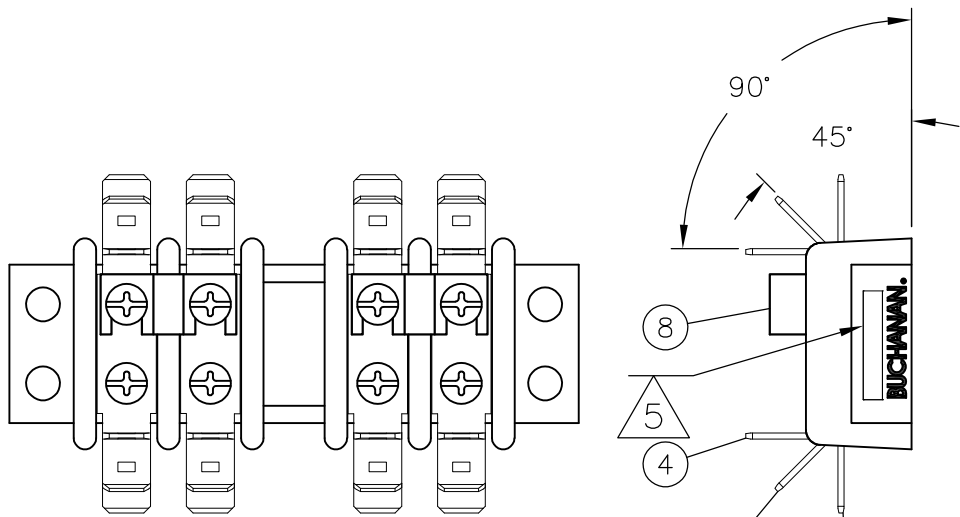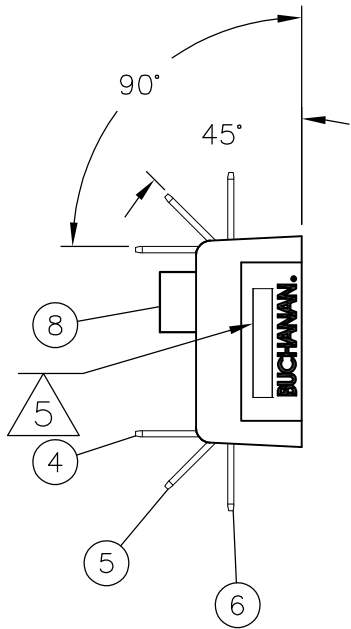

3-1546670-9

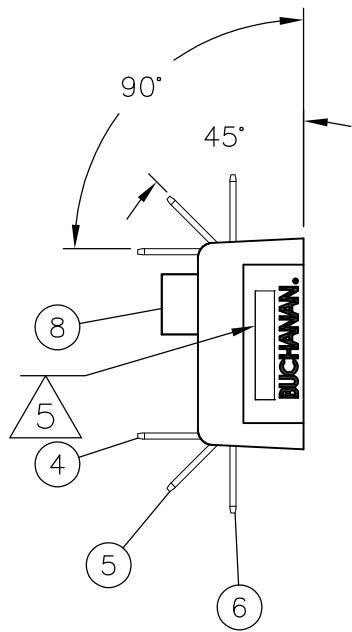

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	S	SCHEGEL	4/4/03	 TE Connectivity									
		CHK	C	RICHARD	4/4/03										
		APVD	C	RICHARD	4/4/03										
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:				NAME		DOUBLE ROW BARRIER STRIP W/ BINDING HD SCREW, .437 SPACING							
		PRODUCT SPEC				—									
		APPLICATION SPEC				—									
		MATERIAL		FINISH		WEIGHT		—							
		0 PLC ± — 1 PLC ± — 2 PLC ± .01 3 PLC ± .005 4 PLC ± — ANGLES ± 3°				SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO			
						A2		00779		C-1546670		—			
						CUSTOMER DRAWING		SCALE		NTS		SHEET 3 of 3		REV K18	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-1546670-6](#)