
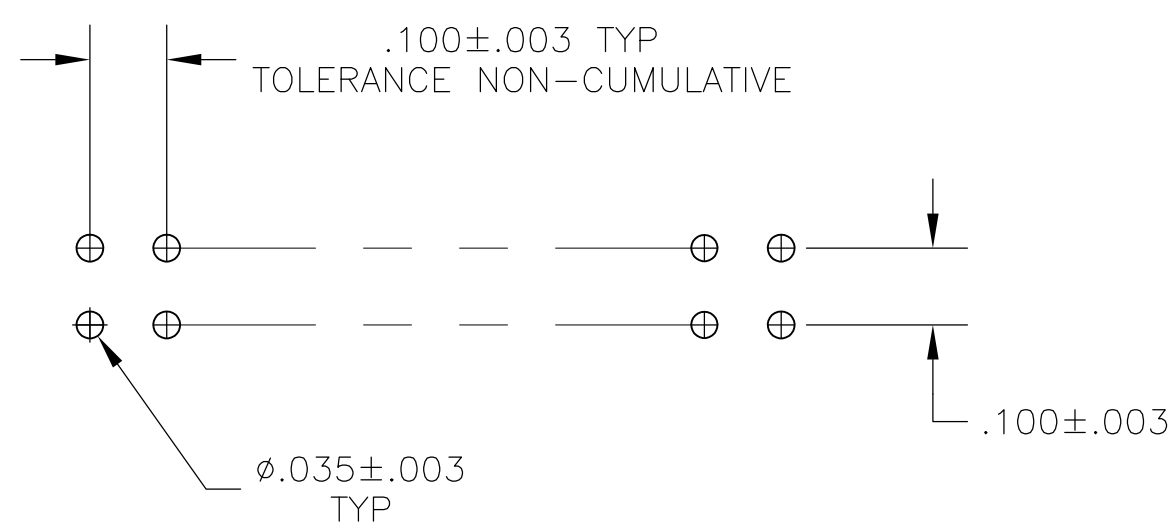
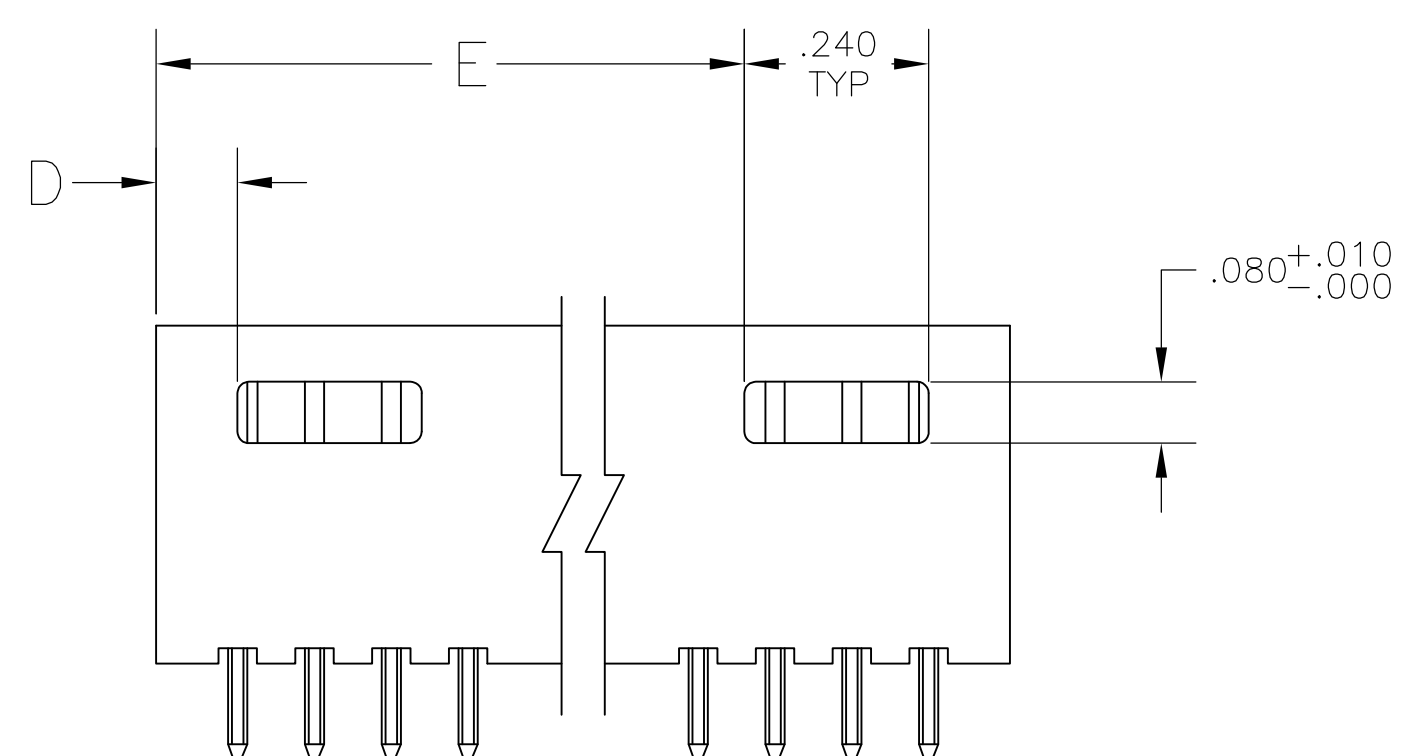
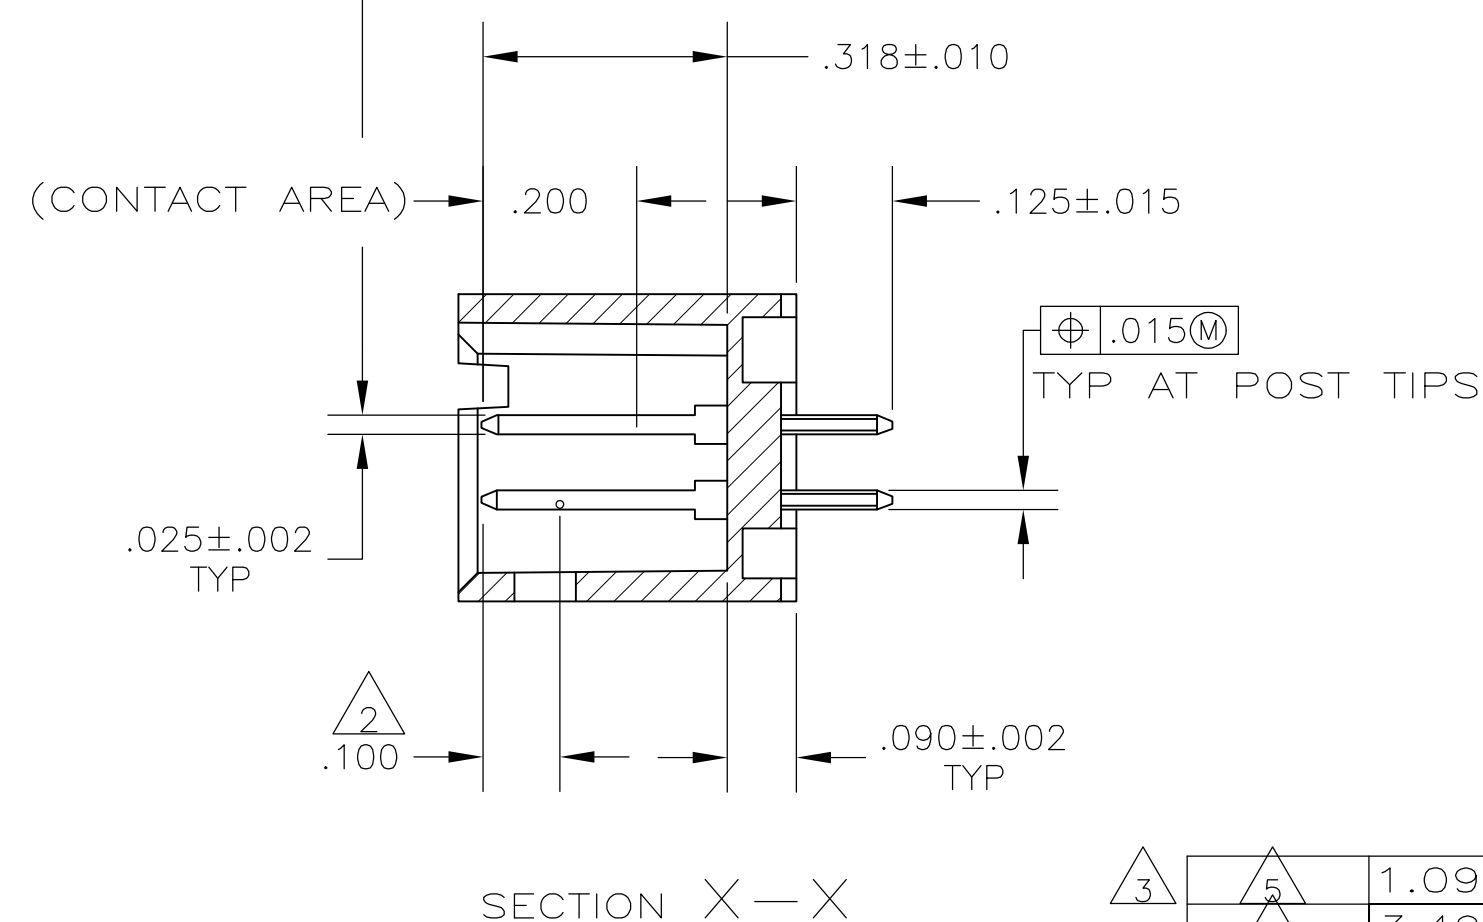
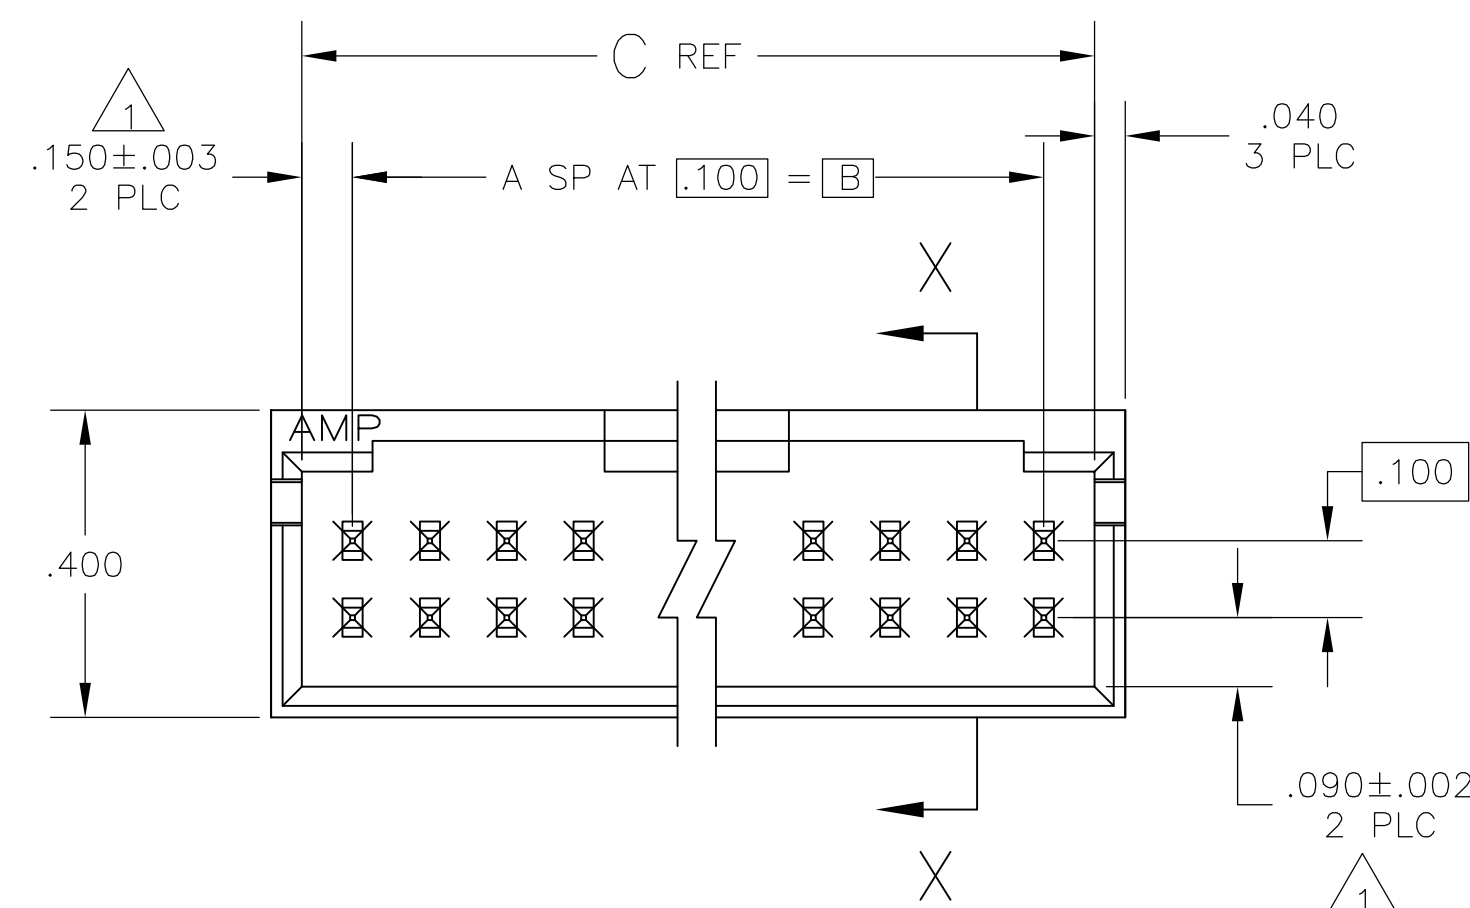
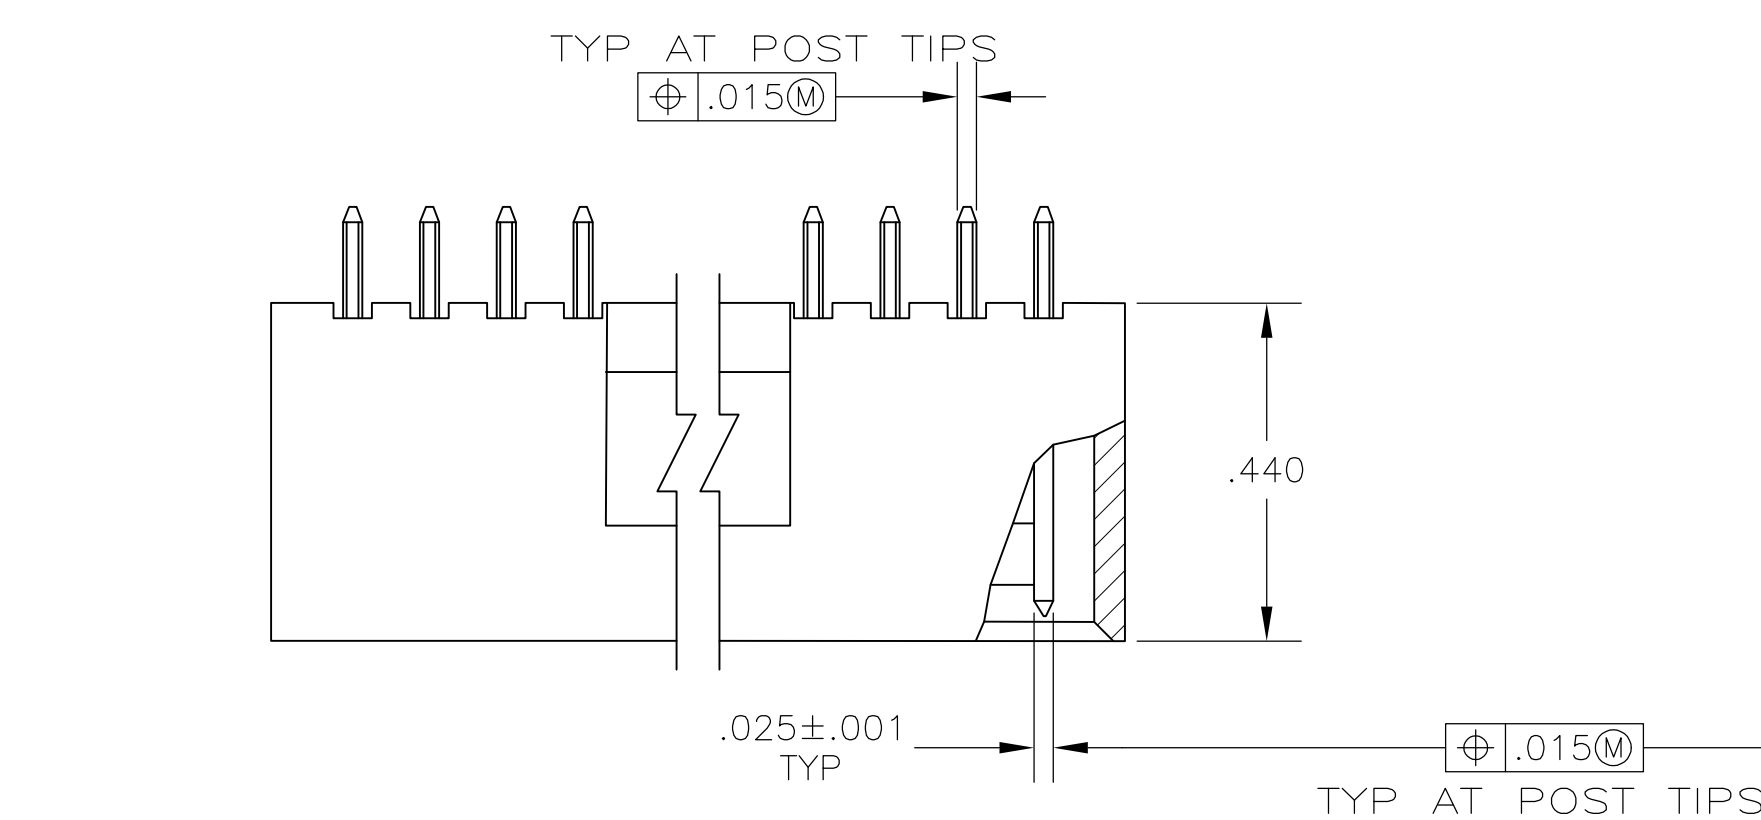




- 1 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- 2 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 3 INDICATED PARTS ARE PACKED IN "GANG-OF -TUBES"
- 4 POSTS; .000030 GOLD IN CONTACT AREA, .000100—.000200 MATTE TIN—LEAD ON SOLDER TAIL, ALL OVER .000050 NICKEL.
- 5 POSTS; .000030 GOLD IN CONTACT AREA, .000100—.000200 MATTE TIN ON SOLDER TAIL, ALL OVER .000050 NICKEL.
- 6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

- 6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

3	5	1.090	.190	1.400	1.100	1 1	24	6	8-103169-5	3	OBSELETE	4	1.090	.190	1.400	1.100	1 1	24	3-103169-5
	5	3.490	.190	3.800	3.500	35	72	6	8-103169-4		4	3.490	.190	3.800	3.500	35	72	6	3-103169-4
	5	3.390	.190	3.700	3.400	34	70	6	8-103169-3		4	3.390	.190	3.700	3.400	34	70	6	3-103169-3
	5	3.290	.190	3.600	3.300	33	68	6	8-103169-2		4	3.290	.190	3.600	3.300	33	68	6	3-103169-2
	5	3.190	.190	3.500	3.200	32	66	6	8-103169-1		4	3.190	.190	3.500	3.200	32	66	6	3-103169-1
	5	3.090	.190	3.400	3.100	31	64	6	8-103169-0		4	3.090	.190	3.400	3.100	31	64	6	3-103169-0
	5	2.990	.190	3.300	3.000	30	62	6	7-103169-9		4	2.990	.190	3.300	3.000	30	62	6	2-103169-9
	5	2.890	.190	3.200	2.900	29	60	7	103169-8		4	2.890	.190	3.200	2.900	29	60	2	103169-8
	5	2.790	.190	3.100	2.800	28	58	7	103169-7		4	2.790	.190	3.100	2.800	28	58	2	103169-7
	5	2.690	.190	3.000	2.700	27	56	7	103169-6		4	2.690	.190	3.000	2.700	27	56	2	103169-6
	5	2.590	.190	2.900	2.600	26	54	7	103169-5		4	2.590	.190	2.900	2.600	26	54	2	103169-5
	5	2.490	.190	2.800	2.500	25	52	7	103169-4		4	2.490	.190	2.800	2.500	25	52	2	103169-4
	5	2.390	.190	2.700	2.400	24	50	7	103169-3		4	2.390	.190	2.700	2.400	24	50	2	103169-3
	5	2.290	.190	2.600	2.300	23	48	7	103169-2		4	2.290	.190	2.600	2.300	23	48	2	103169-2
	5	2.190	.190	2.500	2.200	22	46	7	103169-1		4	2.190	.190	2.500	2.200	22	46	2	103169-1
	5	2.090	.190	2.400	2.100	21	44	7	103169-0		4	2.090	.190	2.400	2.100	21	44	2	103169-0
	5	1.990	.190	2.300	2.000	20	42	6	103169-9		4	1.990	.190	2.300	2.000	20	42	6	1-103169-9
	5	1.890	.190	2.200	1.900	19	40	6	103169-8		4	1.890	.190	2.200	1.900	19	40	1	103169-8
	5	1.790	.190	2.100	1.800	18	38	6	103169-7		4	1.790	.190	2.100	1.800	18	38	1	103169-7
	5	1.690	.190	2.000	1.700	17	36	6	103169-6		4	1.690	.190	2.000	1.700	17	36	1	103169-6
5	1.590	.190	1.900	1.600	16	34	6	103169-5	4	1.590	.190	1.900	1.600	16	34	1	103169-5		
5	1.490	.190	1.800	1.500	15	32	6	103169-4	4	1.490	.190	1.800	1.500	15	32	1	103169-4		
5	1.390	.190	1.700	1.400	14	30	6	103169-3	4	1.390	.190	1.700	1.400	14	30	1	103169-3		
5	1.290	.190	1.600	1.300	13	28	6	103169-2	4	1.290	.190	1.600	1.300	13	28	1	103169-2		
5	1.190	.190	1.500	1.200	12	26	6	103169-1	4	1.190	.190	1.500	1.200	12	26	1	103169-1		
5	1.090	.190	1.400	1.100	1 1	24	6	103169-0	4	1.090	.190	1.400	1.100	1 1	24	1	103169-0		
5	.990	.190	1.300	1.000	10	22	6	5-103169-9	4	.990	.190	1.300	1.000	10	22	6	103169-9		
5	.890	.190	1.200	.900	9	20	5	103169-8	4	.890	.190	1.200	.900	9	20	103169-8			
5	—	.490	1.100	.800	8	18	5	103169-7	4	—	.490	1.100	.800	8	18	103169-7			
5	—	.390	1.000	.700	7	16	5	103169-6	4	—	.390	1.000	.700	7	16	103169-6			
5	—	.390	.900	.600	6	14	5	103169-5	4	—	.390	.900	.600	6	14	103169-5			
5	—	.290	.800	.500	5	12	5	103169-4	4	—	.290	.800	.500	5	12	103169-4			
5	—	.290	.700	.400	4	10	5	103169-3	4	—	.290	.700	.400	4	10	103169-3			
5	—	.190	.600	.300	3	8	5	103169-2	4	—	.190	.600	.300	3	8	103169-2			
5	—	.190	.500	.200	2	6	5	103169-1	4	—	.190	.500	.200	2	6	103169-1			
PLATING	E	D	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER		PLATING	E	D	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER			

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN H.MOLL 04 SEP 87		 TE Connectivity	
		CHG MAYER 04 SEP 87			
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
INCHES		FRACTIONS			
		0 PLC ± —		PRODUCT SPEC	
		1 PLC ± —			
		2 PLC ± —			
		4 PLC ± .005			
6 PLC ± —		APPROXIMATE		HDR ASSY, MOD II, SHROUDED, 4 SIDES, DBL ROW, VERTICAL, .100X.100 C/L, WITH .025 SO POSTS	
ANGLES ± —		APPLICATION SPEC			
FINISH		WEIGHT		SIZE CASE CODE DRAWING NO	
MATERIAL: HYDING: FLAME RETARDANT TEMPERATURE: COLOR-BLACK POSTS: PINK BRINZE		SEE TABLE		A1 00779 C=103169	
		CUSTOMER DRAWING		RESTRICTED	
				SCALE 4:1 SHEET 1 OF 1 REV 12	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[103169-4](#)