

AMPOWER and ACTION PIN are registered trademarks of AMP Incorporated.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00		B	REV PER ECO-12-019757	24NOV2012	CJV	DPO

1. FINISH— POWER CONTACTS — SILVER
SENSE CONTACTS — GOLD ON MATING END.

2. MOUNTING HARDWARE, 2 #4-40 SCREWS AND NUTS OR
2 EYELETS (P/N 748572-2) ARE REQUIRED.

3. HEIGHT OF MATED ASSEMBLY.

4. FOR WAVE SOLDERING APPLICATION ONLY.

5. MOUNTING HOLES OFFSET FROM PART CL BY 0.76
[.030].

6. HOUSING, HIGH TEMP.






7. PRODUCT AND PROCESSING MUST MEET
REQUIREMENTS OF TYCO ELECTRONICS STANDARD
230-702.

8. HOLE DIAMETER AFTER PLATING.

9. ADD 2-DIGIT YEAR AND 2 DIGIT WEEK CODE IN
BLACK INDELIBLE INK, .13" CHARACTER HEIGHT
APPROX AS SHOWN (NOTE CONDUCTOR 1 & 3
SIDE OF HOUSING).

10. WITH ACTION PIN TAILS.

11. THERMOPLASTIC, UL94V-0 POLYESTER.

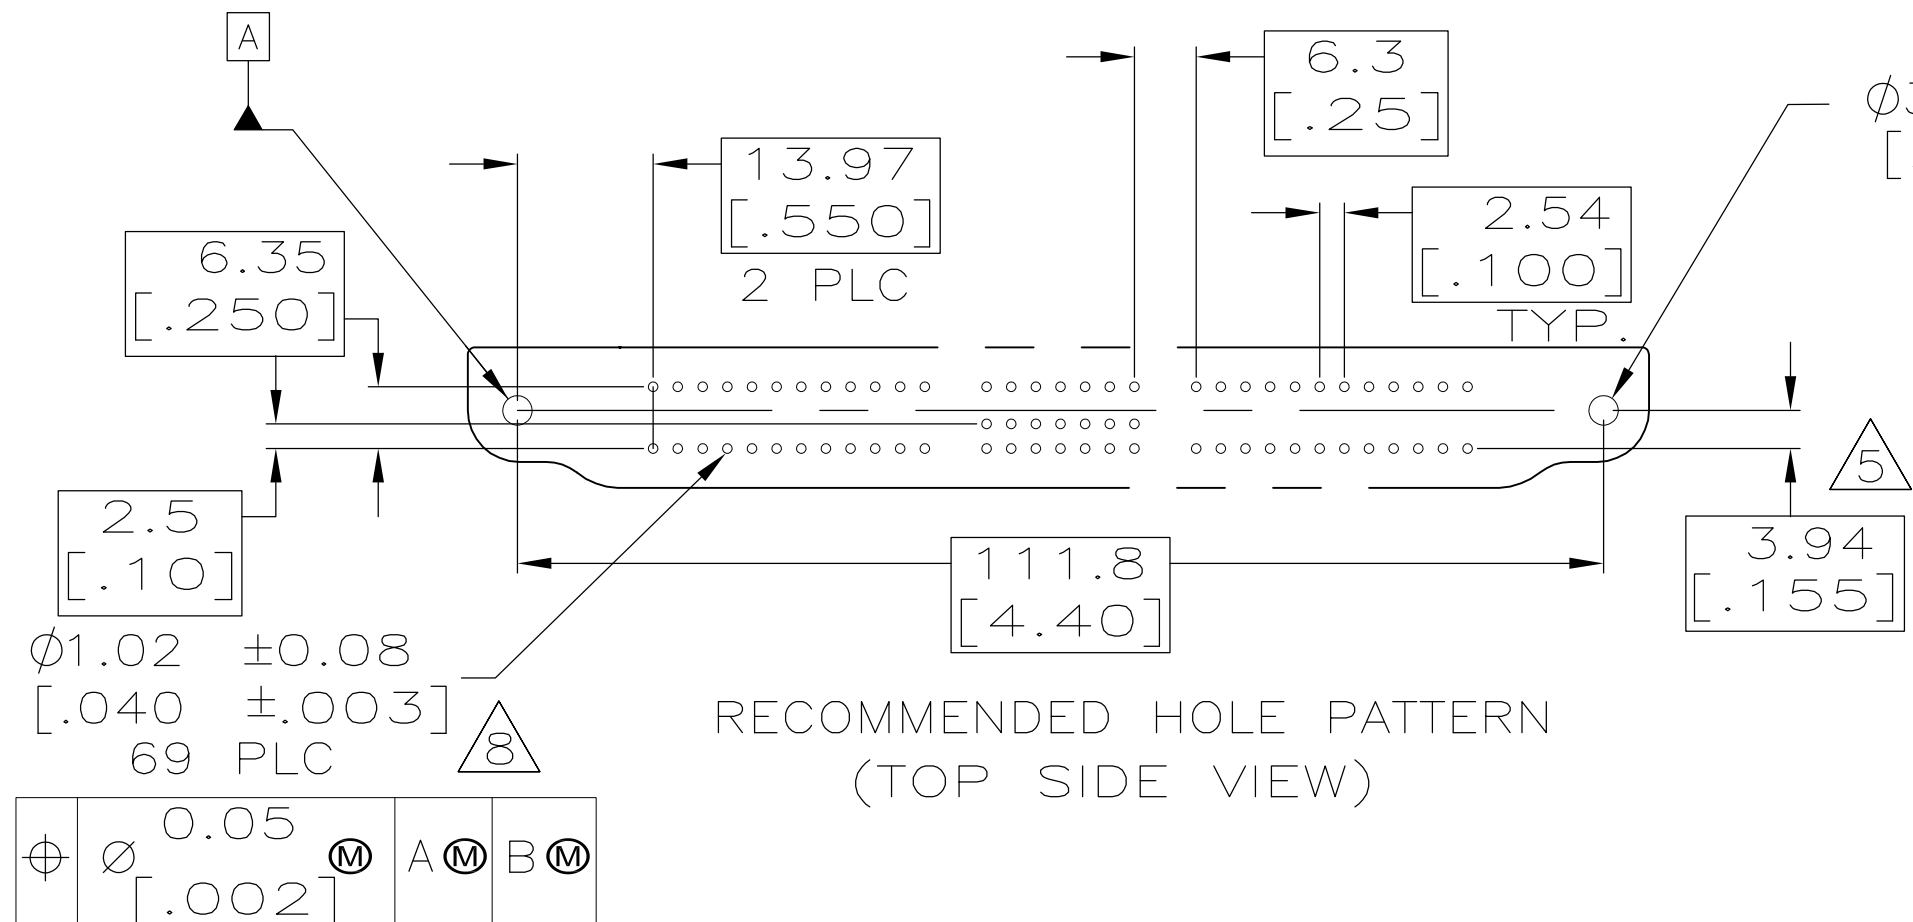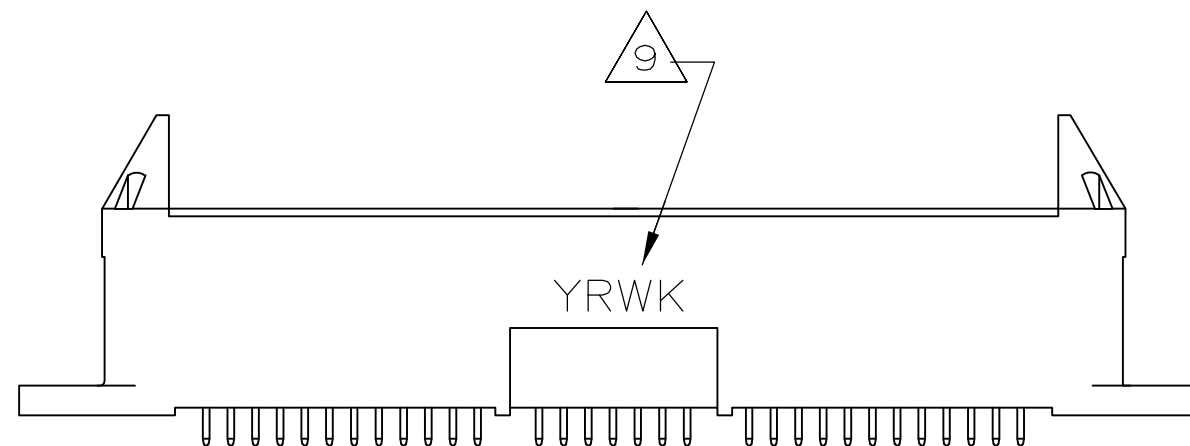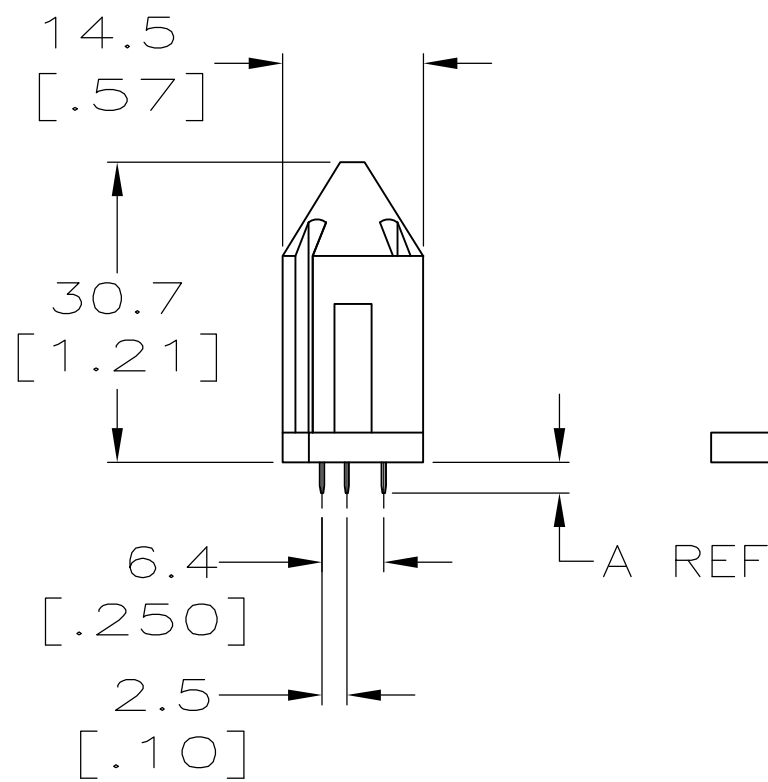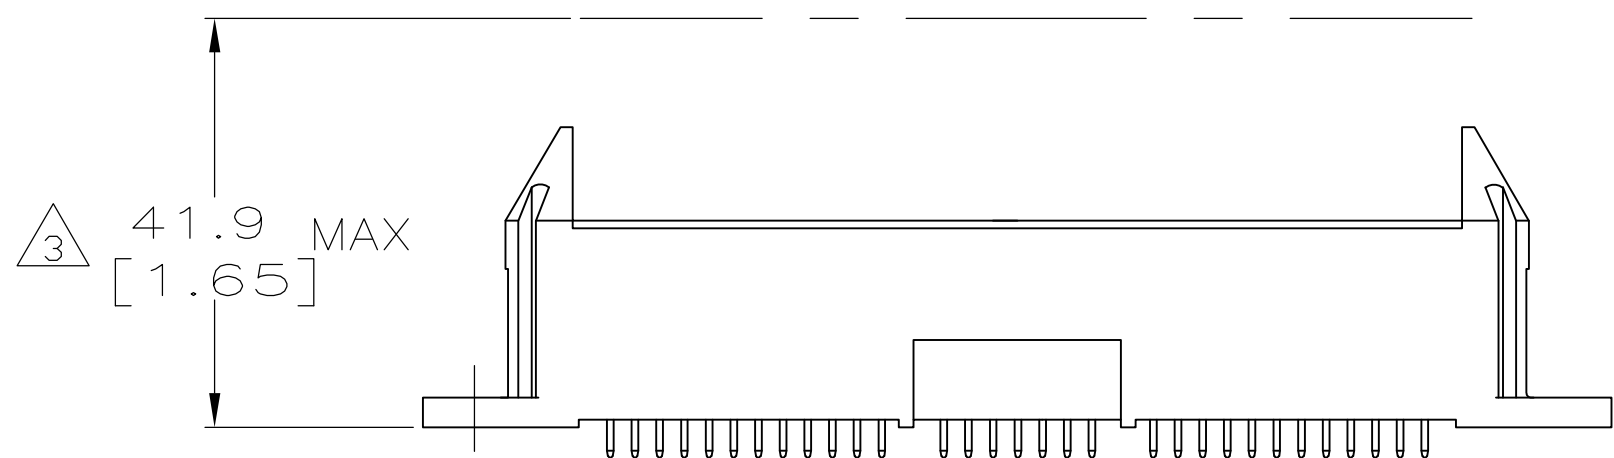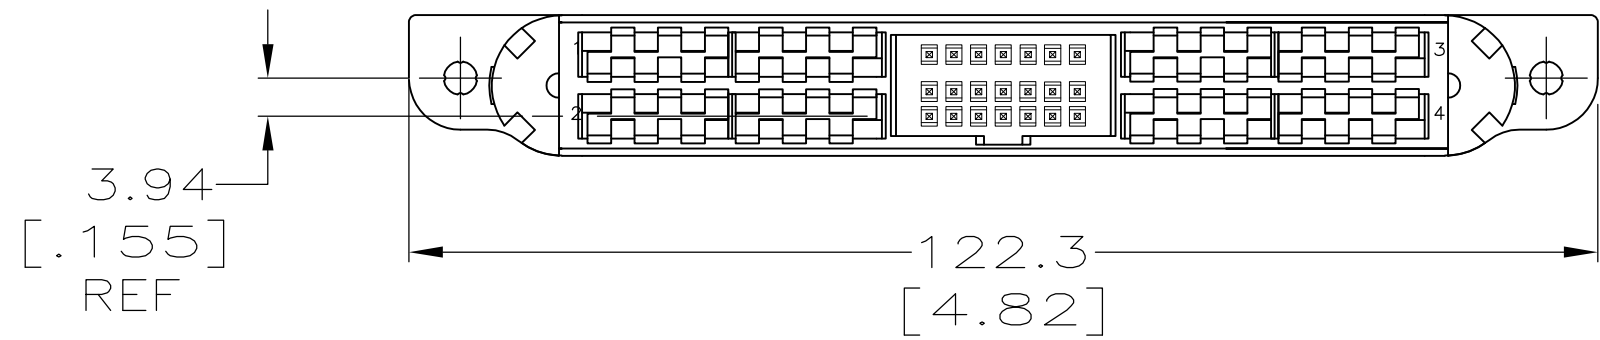

$\phi 3.18 \pm 0.08$
[.125 $\pm .003$] 2 PLC

$\phi 0.08$
[.003] M

11	—	10	2.36 [.093] OR THICKER PCB	5765265-5
6	7.52 [.296]		6.35 [.250] THK PCB	5765265-4
6	5.74 [.226]		4.75 [.187] THK PCB	5765265-3
6	3.96 [.156]		3.18 [.125] THK PCB	5765265-2
6	3.10 [.122]		1.57-2.36 [.062-.093] THK PCB	5765265-1
MATERIAL		DIM A		DESCRIPTION
				PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-2009		DWN E.C.CLAYBAUGH	02/DEC/05	TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK —	—		
		APVD J. SCHOLZ	05/DEC/05	NAME	
		PRODUCT SPEC	—	AMPOWER Wave Crimp System HEADER ASSEMBLY, VERTICAL,	
		APPLICATION SPEC	108-1319		
		FINISH	114-49005		
MATERIAL		WEIGHT	—		
6		CUSTOMER DRAWING	—		
		SCALE	N.T.S.		
		SHEET	1 of 1		
		REV	B		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5765265-1](#)