
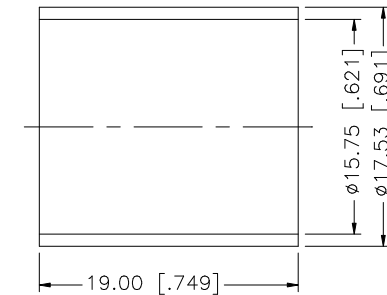
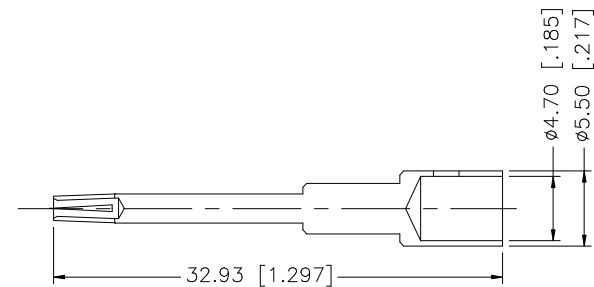
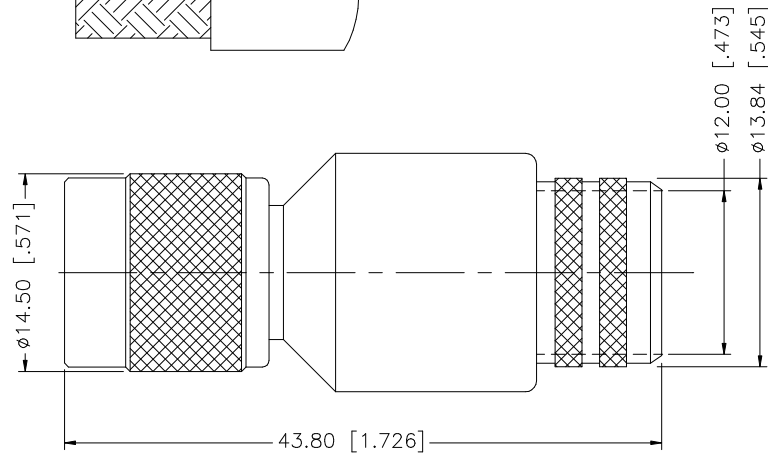


REV.	DATE	DESCRIPTION
NC	11/14/00	INITIAL RELEASE
A	02/15/07	UPDATE DRAWING FORMAT

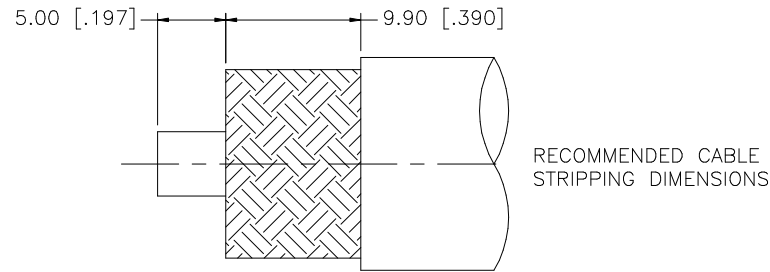

NOTE:

1. CONSULT AMPHENOL CONNEX FOR CRIMP TOOL INFORMATION,

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex					
8						DRAWN	G.R.S.						02/15/07
7						CHECKED							
6						ISSUED			PART DESCRIPTION				
5									TNC REVERSE POLARITY CRIMP PLUG (FOR TIMES LMR 600 CABLE)				
4	FERRULE	COPPER	NICKEL	1					PART NO.				
3	CONTACT PIN	PHOS. BRONZE	GOLD	1			1 OF 1		122417RP				
2	INSULATOR	TEFLON	NATURAL	1					DWG. NO.				
1	BODY	BRASS	NICKEL	1					122417RP.DWG				
	DESCRIPTION	MATERIAL	FINISH	QTY			CAD FILE	C:/122/122417RP.DWG	REV.		SIZE	SCALE	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[122417RP](#)