

# Features


- Ultracompact AC-DC power supply
- Universal input 80-264VAC or 115-370VDC
- Class II power supply with 3kVAC isolation
- Low cost AC/DC power supply
- Short circuit & over current protected
- IEC/EN/UL60950 certified

# Regulated Converters



## RAC04-C

4 Watt  
Single  
Output

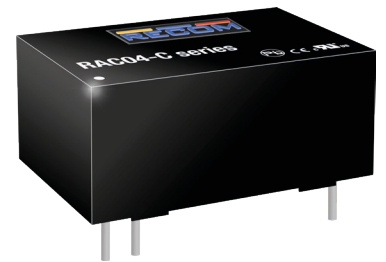

IEC/EN60950-1 certified  
CAN/CSA-C22.2 No. 60950 certified  
UL60950-1 certified  
EN55032 certified  
EN55024 certified  
IEC/EN61000 certified  
CB-Report

## Description

The new RAC04-SC modules are available with output voltages of 3.3, 5, 9, 12, 15, and 24V, and the input-to-output isolation is approximately 3kVAC/1min. With a standby consumption of typical 100mW, the mini power supplies are particularly suitable for energy-saving sleep mode and standby applications. Because of its compact design (height <17 mm), it is a versatile solution for home automation and other similar applications. Complete with an integrated input filter, the series has enhanced EMI performance and complies with EN55032, class B. The mini power supplies are also protected against short circuit with fully automatic restart after the error has been solved. The converters are EN/UL60950-1 certified and come complete with a 3 year warranty.

## Selection Guide

| Part Number | Input Voltage Range [VAC] | Output Voltage [VDC] | Output Current [mA] | Efficiency typ <sup>(1)</sup> [%] | Max. Capacitive Load <sup>(2,3)</sup> [µF] |
|-------------|---------------------------|----------------------|---------------------|-----------------------------------|--|
| RAC04-3.3SC | 80-264                    | 3.3                  | 1200                | 67                                | 5600                                       |
| RAC04-05SC  | 80-264                    | 5                    | 800                 | 72                                | 2000                                       |
| RAC04-09SC  | 80-264                    | 9                    | 444                 | 76                                | 1500                                       |
| RAC04-12SC  | 80-264                    | 12                   | 333                 | 74                                | 560  |
| RAC04-15SC  | 80-264                    | 15                   | 267                 | 77                                | 470  |
| RAC04-24SC  | 80-264                    | 24                   | 167                 | 77                                | 150  |

### Notes:

- Note1: Efficiency is tested at nominal input and full load at +25°C ambient  
 Note2: Measured @ 230VAC / 50Hz / Ta=25°C with constant resistant mode at full load  
 Note3: If used @ 115VAC / 60Hz with full load, max. capacitive load is less, please contact TechsupportAT@recom-power.com for detailed information

## Model Numbering



### Ordering Examples:

|            |        |        |               |
|------------|--------|--------|---------------|
| RAC04-05SC | 4 Watt | 5Vout  | Single Output |
| RAC04-12SC | 4 Watt | 12Vout | Single Output |

## Specifications (measured at Ta= 25°C, nominal input voltage, full load otherwise noted)

| BASIC CHARACTERISTICS                |                            |                  |      |                  |
|--------------------------------------|----------------------------|------------------|------|------------------|
| Parameter                            | Condition                  | Min.             | Typ. | Max.             |
| Input Voltage Range <sup>(4,5)</sup> | nom. Vin = 230VAC          | 80VAC<br>115VDC  |      | 264VAC<br>370VDC |
| Input Current                        | 115VAC<br>230VAC           |                  |      | 110mA<br>72mA    |
| Inrush Current                       | <0.5ms cold start at +25°C | 115VAC<br>230VAC |      | 30A<br>60A       |
| No load Power Consumption            | 80-264VAC                  |                  |      | 200mW            |
| Input Frequency Range                | AC Input                   | 47Hz             |      | 63Hz             |
| Minimum Load <sup>(7)</sup>          |                            | 10%              |      |                  |

continued on next page

Specifications (measured at Ta= 25°C, nominal input voltage, full load otherwise noted)



## BASIC CHARACTERISTICS

| Parameter                              | Condition                |               | Min. | Typ.  | Max.     |
|--|--------------------------|---------------|------|-------|----------|
| Internal Operating Frequency           | 100% load at nominal Vin |               |      | 40kHz |          |
| Output Ripple and Noise <sup>(6)</sup> | 20MHz BW                 | 115VAC/230VAC |      |       | 200mVp-p |

**Notes:**

- Note4: The products were submitted for safety files at AC-Input operation
- Note5: Refer to line derating graph on page PA-3
- Note6: Measurements are made with a 0.1µF MLCC across output (low ESR)

### Efficiency vs. Load

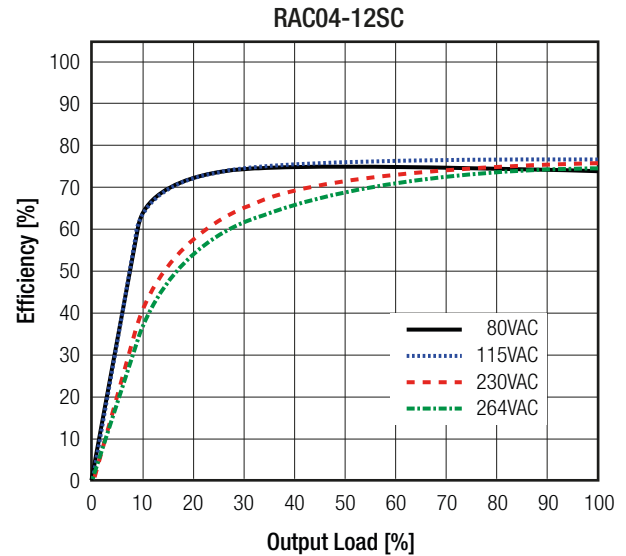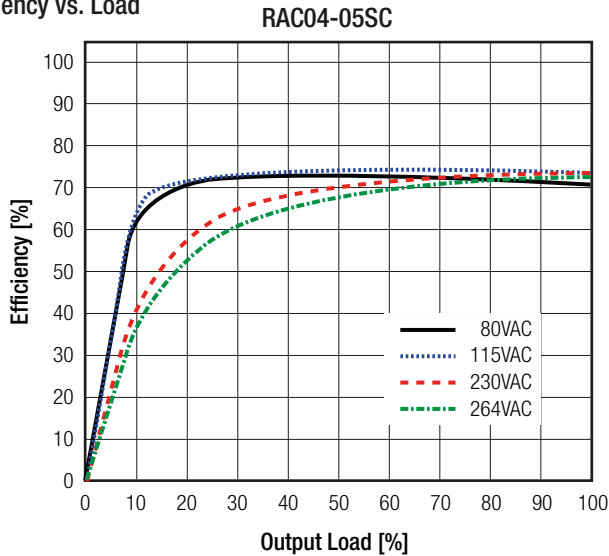

## REGULATIONS

| Parameter                      | Condition             | Value                  |
|--------------------------------|-----------------------|------------------------|
| Output Accuracy                |                       | ±2.0% typ./ ±5.0% max. |
| Line Regulation                | low line to high line | ±0.5% typ./ ±1.0% max. |
| Load Regulation <sup>(7)</sup> | 10% to 100% load      | 1.5% typ./ 5.0% max.   |

**Notes:**


- Note7: Operation below 10% load will not harm the converter, but specifications may not be met

## PROTECTIONS

| Parameter                      | Type        |                     | Value                           |
|--------------------------------|-------------|---------------------|---------------------------------|
| Short Circuit Protection (SCP) | below 100mΩ |                     | Hiccup mode, automatic recovery |
| Over Voltage Category          |             |                     | OVCII                           |
| Over Current Limit             |             |                     | 105% - 155%                     |
| Isolation Voltage              | I/P to O/P  | tested for 1 minute | 3kVAC                           |
| Isolation Resistance           |             |                     | 1GΩ min.                        |
| Isolation Capacitance          |             |                     | 1000pF typ.                     |
| Leakage Current                |             |                     | 0.85mA max.                     |

**Notes:**

- Note8: Refer to local safety regulations if input over-current protection is also required. Recommended fuse: slow blow type
- Note9: MOV required for 230VAC operation. The Varistor should comply with IEC-61051-2. e.g. EPCOS S14 Series

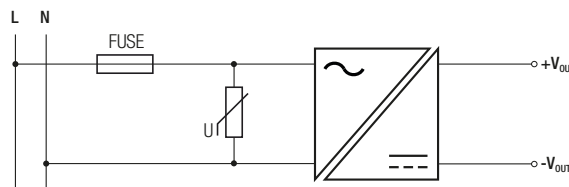


Specifications (measured at Ta= 25°C, nominal input voltage, full load otherwise noted)


| ENVIRONMENTAL               |                                  |                         |                             |
|-----------------------------|----------------------------------|-------------------------|-----------------------------|
| Parameter                   | Condition                        |                         | Value                       |
| Operating Temperature Range | @ natural convection 0.1m/s      | full load               | -25°C to +60°C              |
|                             |                                  | refer to derating graph | -25°C to +85°C              |
| Maximum Case Temperature    |                                  |                         | +100°C                      |
| Operating Altitude          |                                  |                         | 2000m                       |
| Operating Humidity          | non-condensing                   |                         | 95% RH max.                 |
| MTBF                        | according to MIL-HDBK-217F, G.B. | +25°C                   | 500 x 10 <sup>3</sup> hours |

**Derating Graph**

(@ Chamber and natural convection 0.1 m/s)

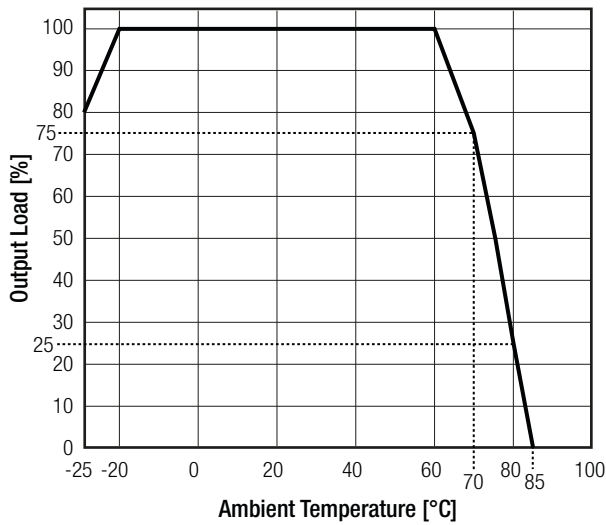

**Line Derating**

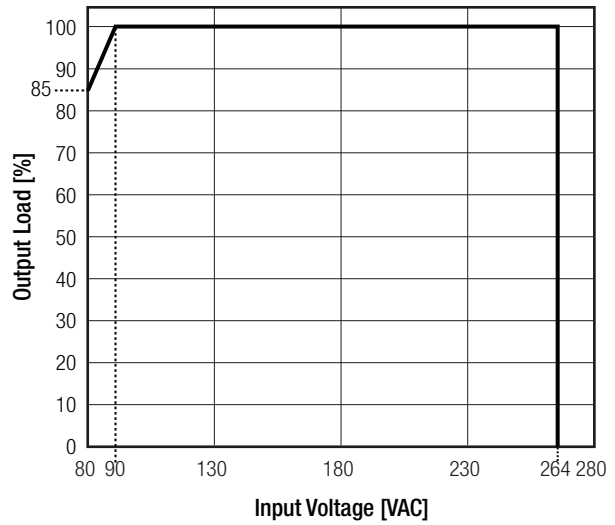

| SAFETY AND CERTIFICATIONS   |                            |  |
|---|----------------------------|--|
| Certificate Type (Safety)   | Report / File Number       | Standard   |
| Information Technology Equipment - General Requirments for Safety                               | LVD1606038                 | IEC60950-1:2005 2nd Edition + 2:2013<br>EN60950-1:2006 + A2:2013                     |
| Information Technology Equipment - General Requirments for Safety (CB Scheme)                   | L0339m10-CB-1-B1           | EN60950-1:2006 + A2:2013<br>IEC60950-1:2005 2nd Edition + A2:2013                    |
| Information Technology Equipment - General Requirments for Safety                               | E224736-A5-UL              | CAN/CSA-C22.2 No. 60950-1-07, 2nd Edition, 2007<br>UL No. 60950-1, 2nd Edition, 2007 |
| EAC Safety of Low Voltage Equipment   | RU-AT.49.09571             | TP TC 004/2011   |
| RoHS2+  |                            | RoHS-2011/65/EU + AM-2015/863  |
| EMC Compliance  | Condition                  | Standard / Criterion   |
| Electromagnetic compatibility of multimedia equipment – Emission Requirements                   |                            | EN55032:2015, Class B  |
| Information technology equipment - Immunity characteristics - Limits and methods of measurement |                            | EN55024:2010 + A1:2015   |
| ESD Electrostatic discharge immunity test   | Air ±8.0kV, Contact ±4.0kV | IEC61000-4-2:2008, Criteria A  |
| Radiated, radio-frequency, electromagnetic field immunity test                                  | 3V/m                       | IEC61000-4-3:2006 + A2:2010, Criteria A  |
| Fast Transient and Burst Immunity   | AC Power Port: ±1.0kV      | IEC61000-4-4:2012, Criteria A  |
| Surge Immunity  | AC Power Port: L-N ±1.0kV  | IEC61000-4-5:2005, Criteria A  |

continued on next page







**Specifications (measured at Ta= 25°C, nominal input voltage, full load otherwise noted)**

| EMC Compliance  | Condition                   | Standard / Criterion           |
|---|-----------------------------|--------------------------------|
| Immunity to conducted disturbances, induced by radio-frequency fields | AC Power Port 3.0V          | IEC61000-4-6:2008, Criteria A  |
| Voltage Dips and Interruptions  | Voltage Dips >95%           | IEC61000-4-11:2004, Criteria A |
|   | Voltage Dips 30%            | IEC61000-4-11:2004, Criteria A |
|   | Voltage Interruptions > 95% | IEC61000-4-11:2004, Criteria C |
| Limits of Voltage Fluctuations & Flicker                              |                             | EN61000-3-3:2013               |

**DIMENSION AND PHYSICAL CHARACTERISTICS**

| Parameter         | Type            | Value   |
|-------------------|-----------------|---|
| Material          | case<br>potting | black plastic (UL94V-0)<br>silicone (UL94V-0) |
| Dimension (LxWxH) |                 | 37.8 x 23.9 x 16.4mm                          |
| Weight            |                 | 30g typ.                                      |

**Dimension Drawing (mm)**

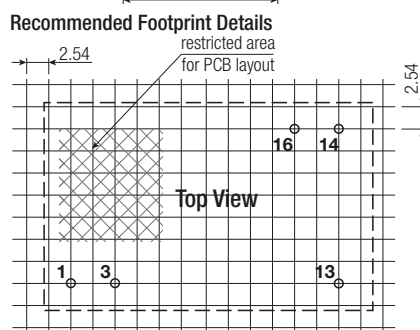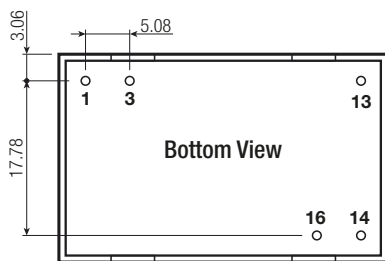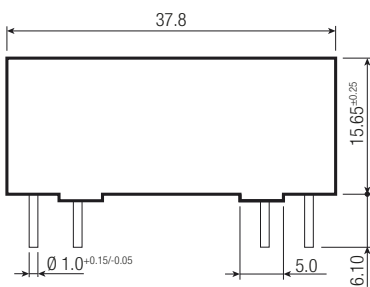

**Pin Connections**

| Pin # | Single     |
|-------|------------|
| 1     | VAC in (L) |
| 3     | VAC in (N) |
| 13    | NC         |
| 14    | -Vout      |
| 16    | +Vout      |

NC= no connection  
Tolerance: xx.x= ±0.5mm

**PACKAGING INFORMATION**

| Parameter                   | Type           | Value                 |
|-----------------------------|----------------|-----------------------|
| Packaging Dimension (LxWxH) | tube           | 520.0 x 32.0 x 27.0mm |
| Packaging Quantity          |                | 12pcs                 |
| Storage Temperature Range   | non-condensing | -40°C to +100°C       |
| Storage Humidity            |                | 95% RH max.           |

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[RECOM:](#)

[RAC04-15SC](#) [RAC04-09SC](#) [RAC04-24SC](#) [RAC04-05SC](#) [RAC04-3.3SC](#) [RAC04-12SC](#)