




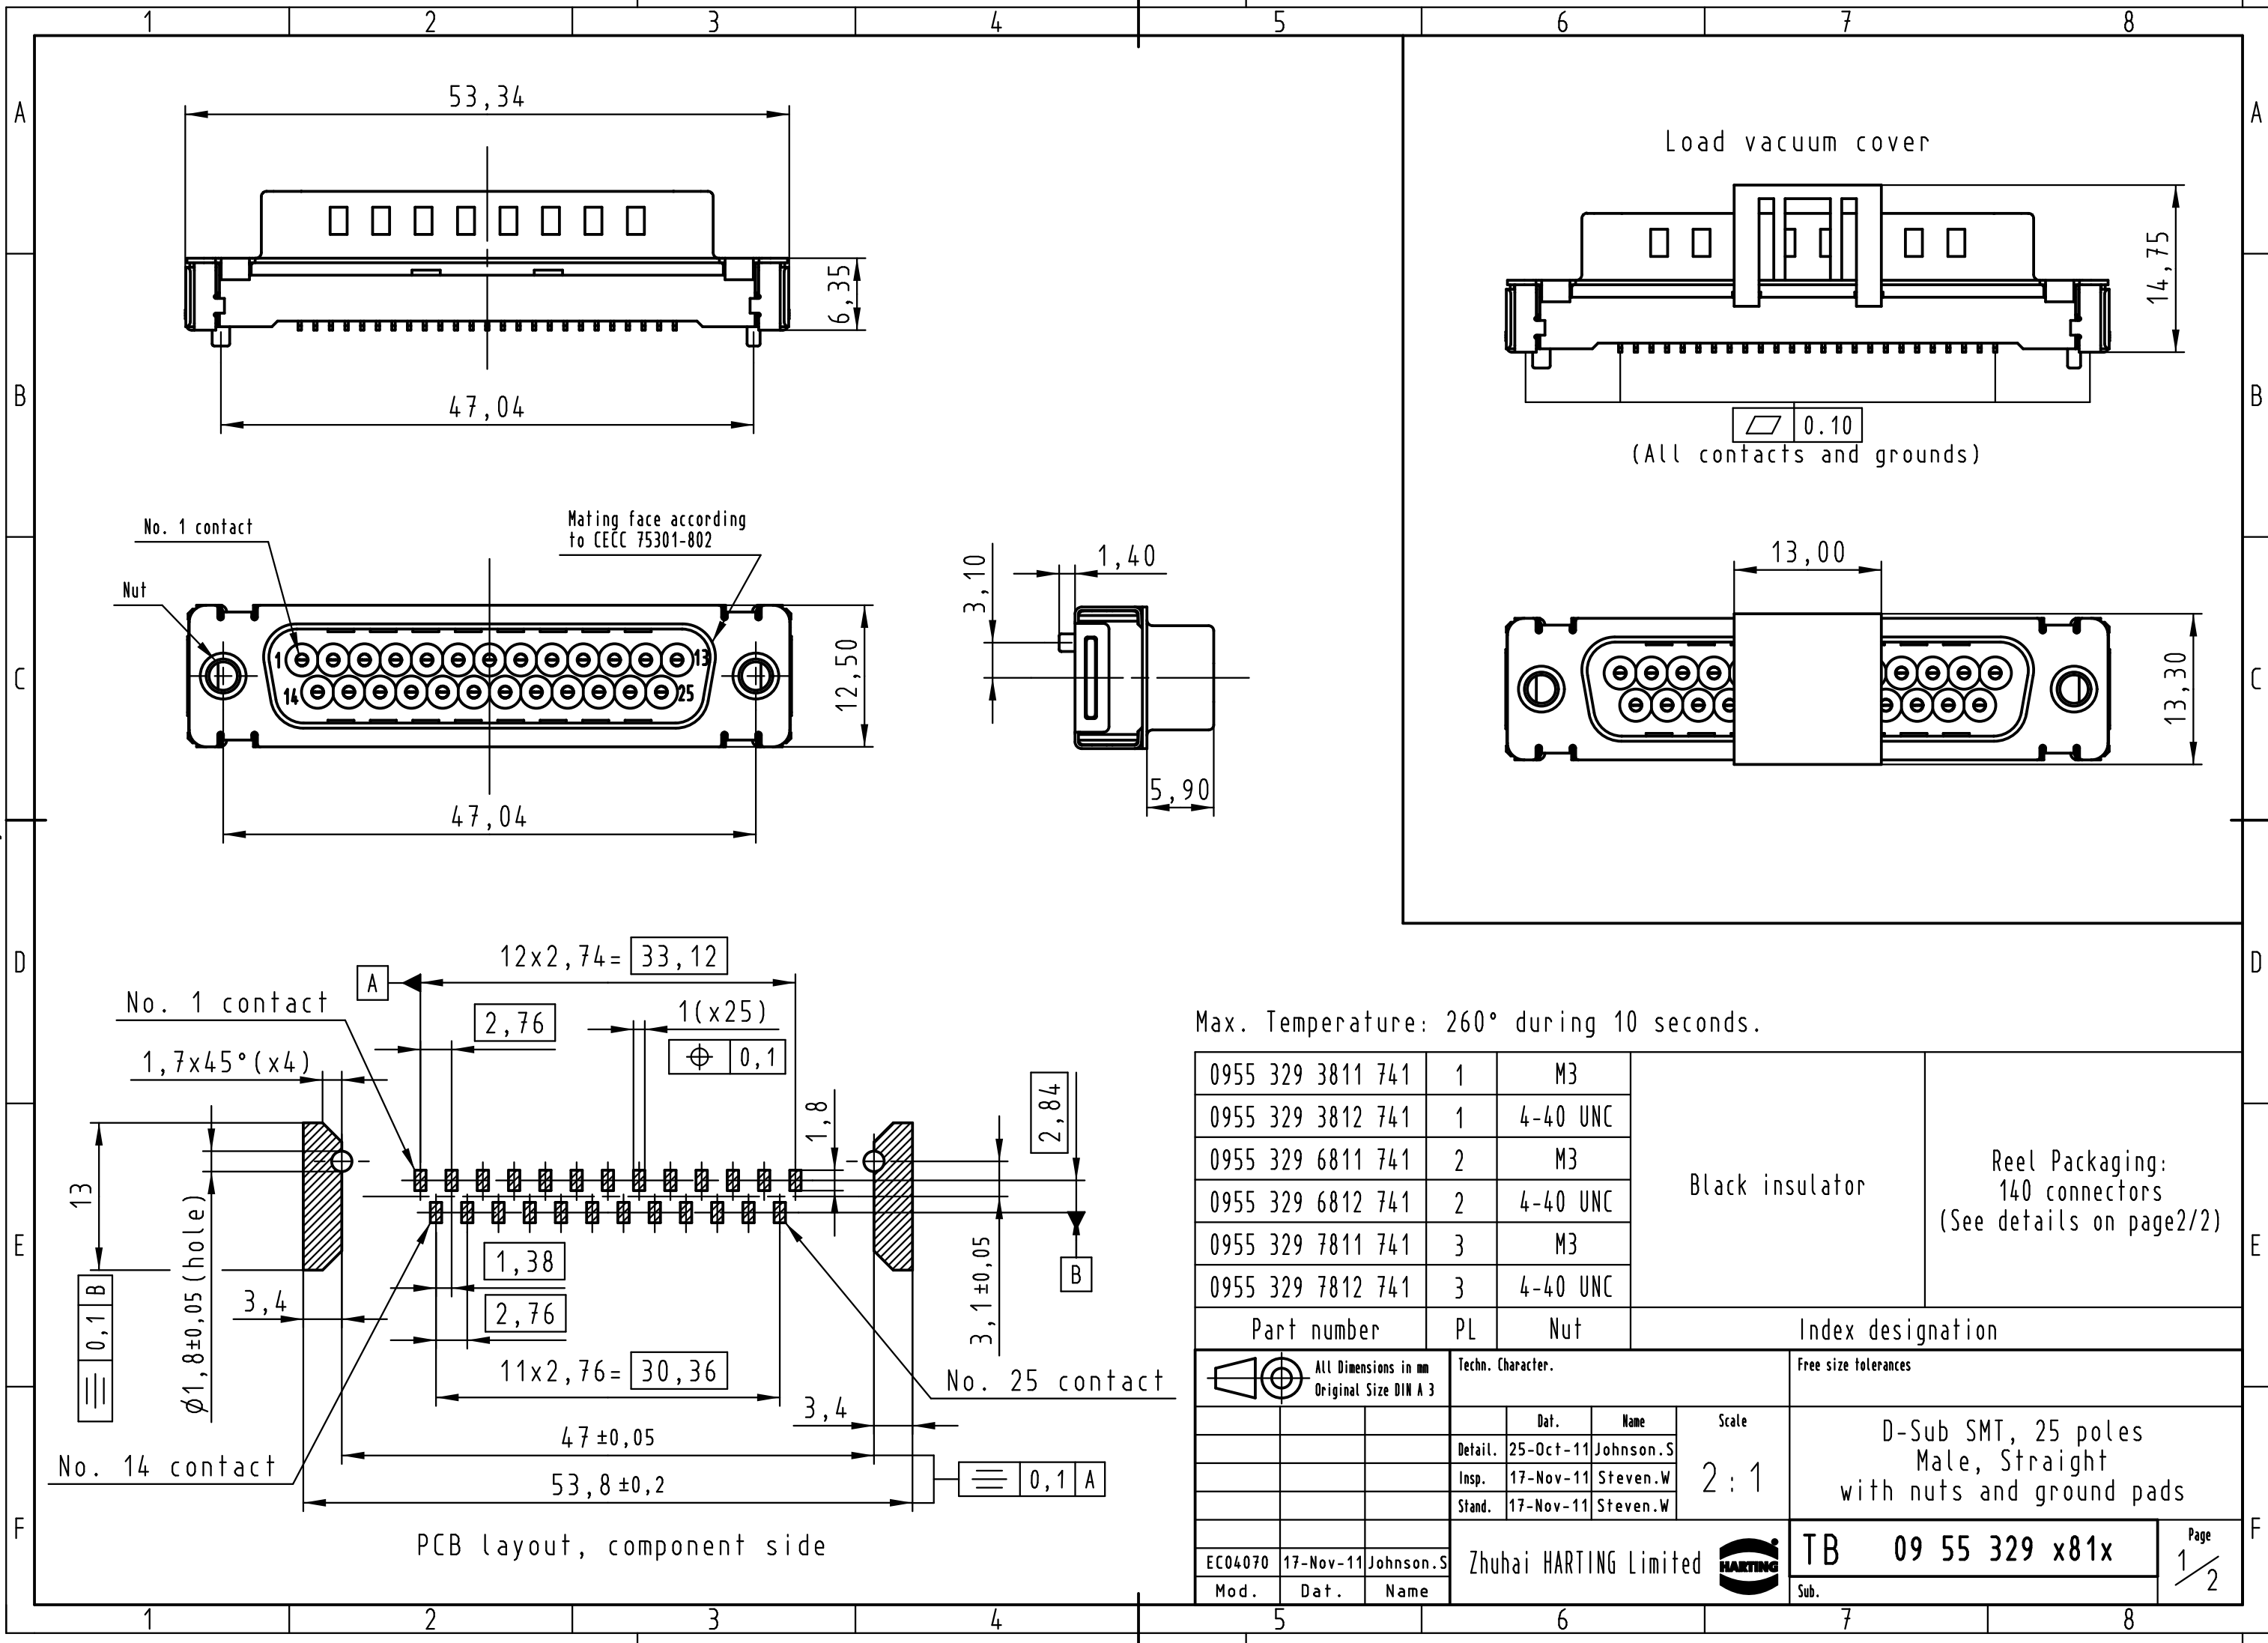


Max. Temperature: 260° during 10 seconds.

0955 329 3811 741	1	M3	Black insulator	Reel Packaging: 140 connectors (See details on page2/2)
0955 329 3812 741	1	4-40 UNC		
0955 329 6811 741	2	M3		
0955 329 6812 741	2	4-40 UNC		
0955 329 7811 741	3	M3		
0955 329 7812 741	3	4-40 UNC		
Part number		PL	Nut	Index designation
		Techn. Character.		Free size tolerances
			Dat.	Name
		Detail.	25-Oct-11	Johnson.S
		Insp.	17-Nov-11	Steven.W
		Stand.	17-Nov-11	Steven.W
				Scale 2:1
				D-Sub SMT, 25 poles Male, Straight with nuts and ground pads
EC04070	17-Nov-11	Johnson.S	Zhuhai HARTING Limited	
Mod.	Dat.	Name	TB 09 55 329 x81x	
				Page 1/2

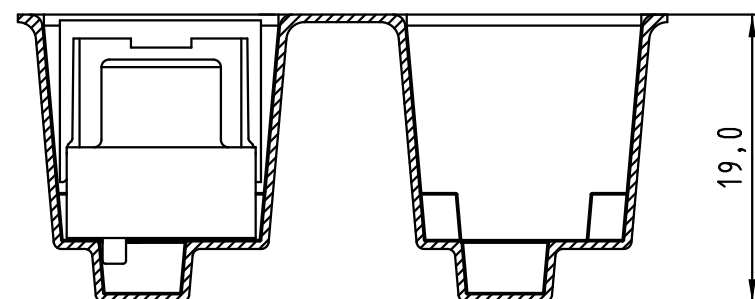


Detail A

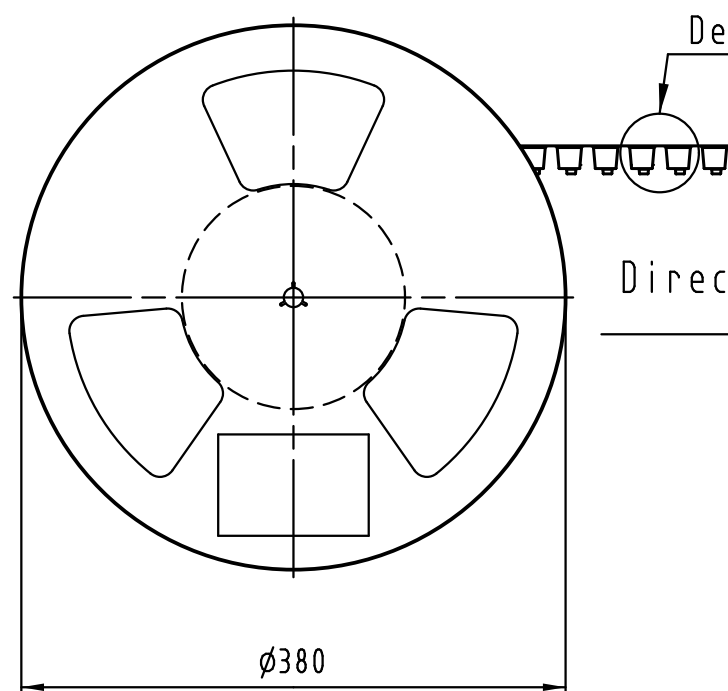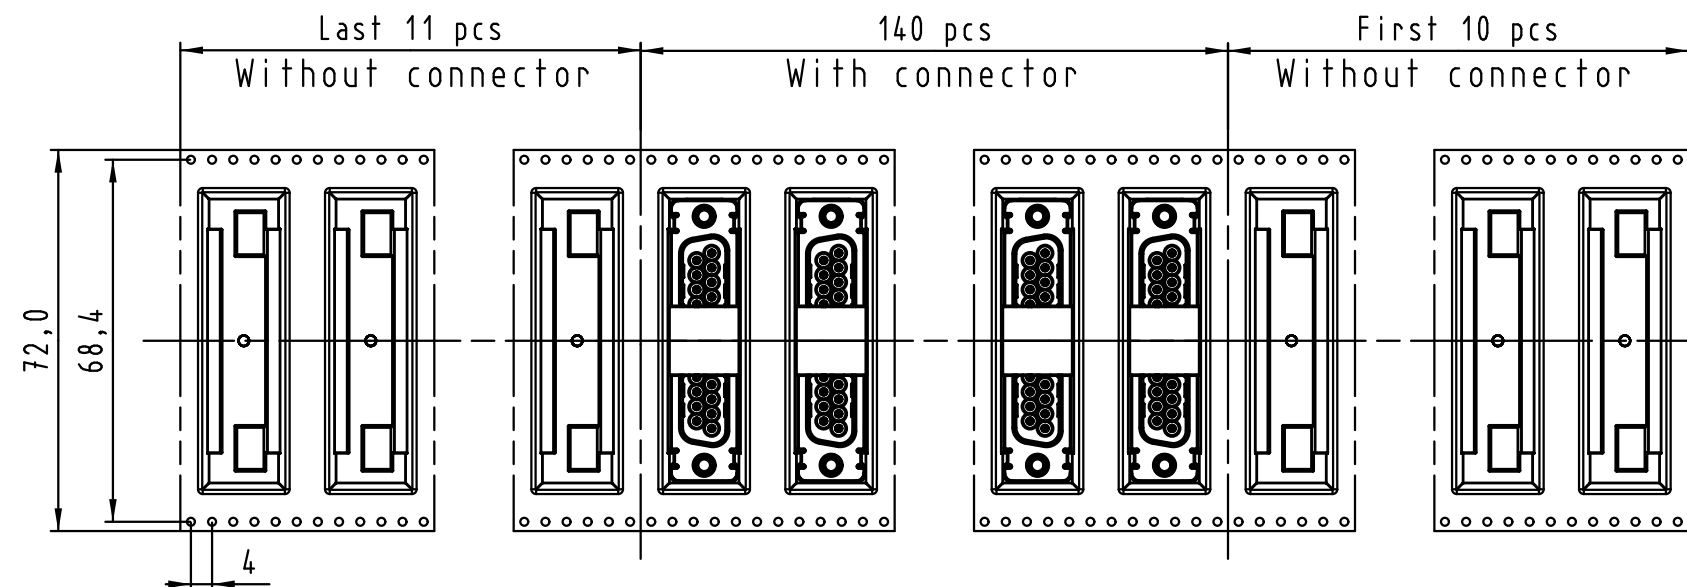

Detail A

Direction of unreeling

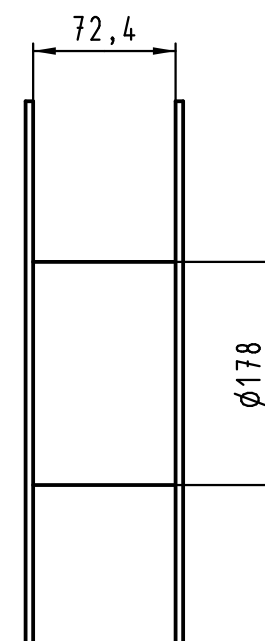

See TB 09 55 329 x81x folio 1/2
for connector dimensions
and PCB layout

Packaging in accordance with
EIA 481-2.

0955 329 3811 741	1	M3	Black insulator	Reel Packaging: 140 connectors
0955 329 3812 741	1	4-40 UNC		
0955 329 6811 741	2	M3		
0955 329 6812 741	2	4-40 UNC		
0955 329 7811 741	3	M3		
0955 329 7812 741	3	4-40 UNC		
Part number	PL	Nut	Index designation	

			All Dimensions in mm Original Size DIN A 3			Techn. Character.			Free size tolerances		
				Dat.	Name	Scale	D-Sub SMT, 25 poles Male, Straight with nuts and ground pads				
			Detail.	25-Oct-11	Johnson.S						
			Insp.	17-Nov-11	Steven.W						
			Stand.	17-Nov-11	Steven.W						
							TB 09 55 329 x81x			Page 2 / 2	
EC04070	17-Nov-11	Johnson.S	Zhuhai HARTING Limited				Sub.				
Mod.	Dat.	Name									

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

HARTING:

[09553293812741](#) [09553293811741](#) [09553293821741](#) [09553293822741](#)