



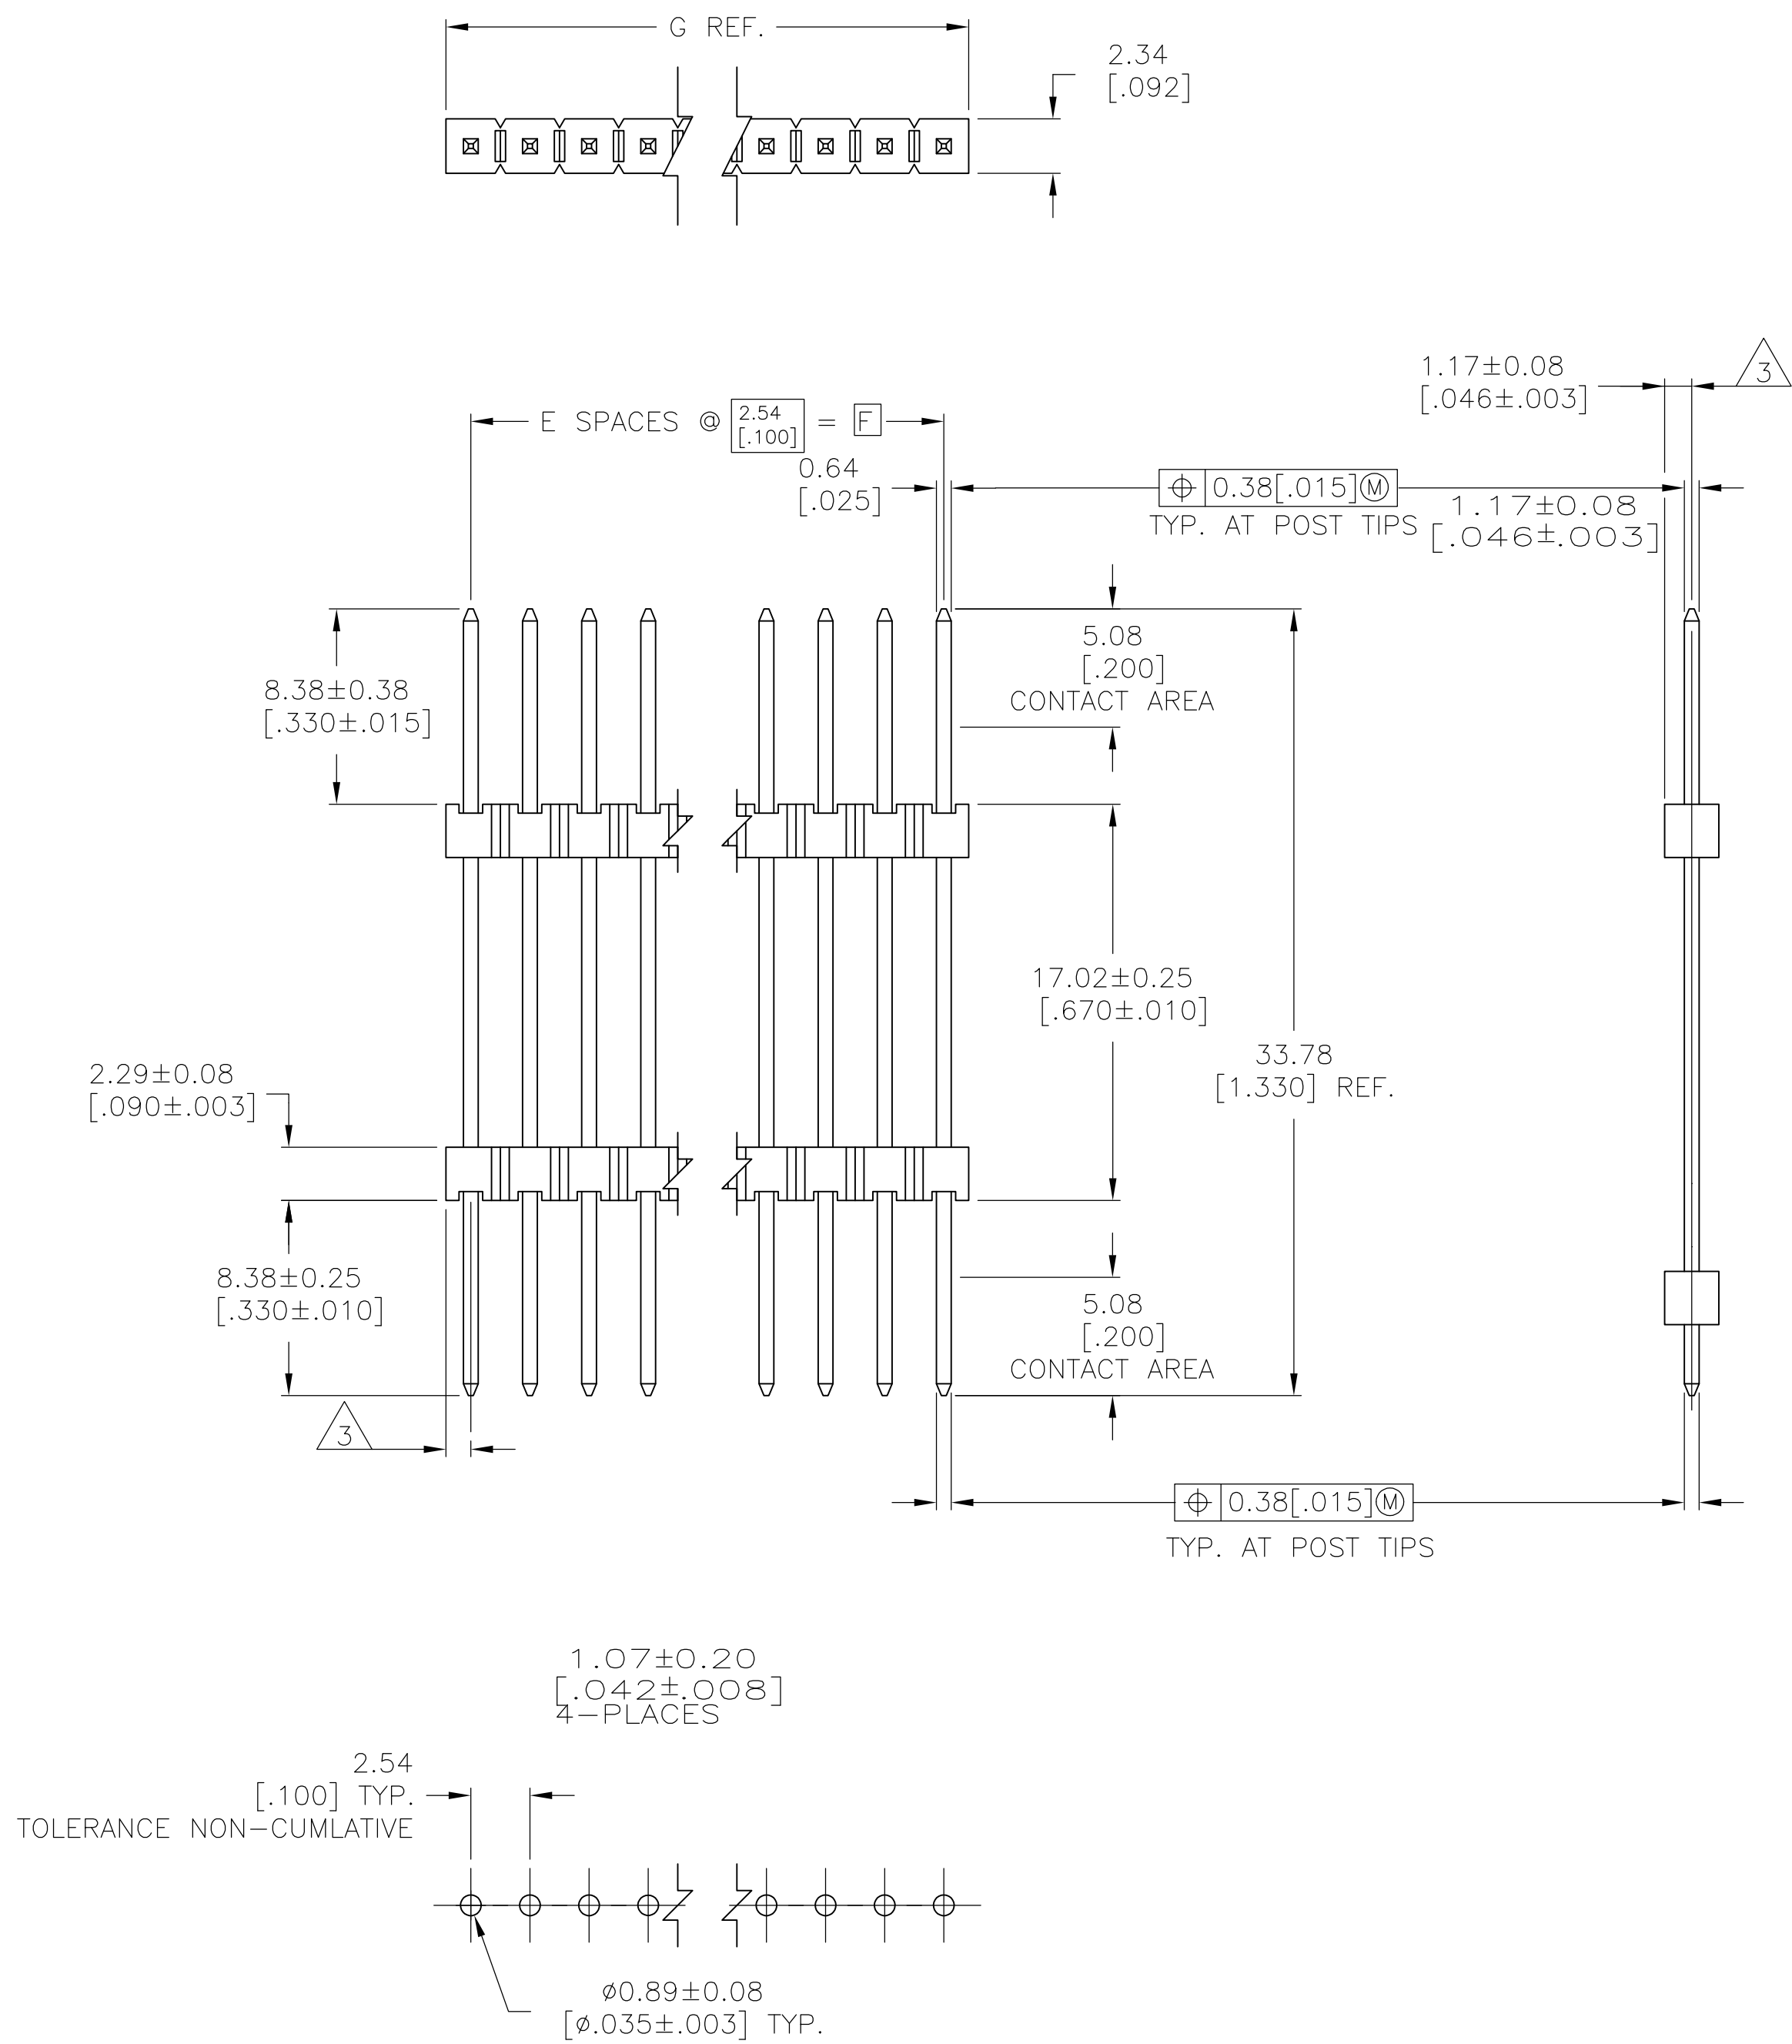

RECOMMENDED HOLE LAYOUT

1. ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER
IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
2. THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
3. HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.
4. FINISH: 0.000381 [.000015] GOLD ON CONTACT AREA,
5. ALL OVER 0.00127 [.000050] NICKEL ENTIRE POST.

101.19 [3.984]	99.06 [3.900]	39	40	4-146479-0
98.65 [3.884]	96.52 [3.800]	38	39	3-146479-9
96.11 [3.784]	93.98 [3.700]	37	38	3-146479-8
93.57 [3.684]	91.44 [3.600]	36	37	3-146479-7
91.03 [3.584]	88.90 [3.500]	35	36	3-146479-6
88.49 [3.484]	86.36 [3.400]	34	35	3-146479-5
85.95 [3.384]	83.82 [3.300]	33	34	3-146479-4
83.41 [3.284]	81.28 [3.200]	32	33	3-146479-3
80.87 [3.184]	78.74 [3.100]	31	32	3-146479-2
78.33 [3.084]	76.20 [3.000]	30	31	3-146479-1
75.79 [2.984]	73.66 [2.900]	29	30	3-146479-0
73.25 [2.884]	71.12 [2.800]	28	29	2-146479-9
70.71 [2.784]	68.58 [2.700]	27	28	2-146479-8
68.17 [2.684]	66.04 [2.600]	26	27	2-146479-7
65.63 [2.584]	63.50 [2.500]	25	26	2-146479-6
63.09 [2.484]	60.96 [2.400]	24	25	2-146479-5
60.55 [2.384]	58.42 [2.300]	23	24	2-146479-4
58.01 [2.284]	55.88 [2.200]	22	23	2-146479-3
55.47 [2.184]	53.34 [2.100]	21	22	2-146479-2
52.93 [2.084]	50.80 [2.000]	20	21	2-146479-1
50.39 [1.984]	48.26 [1.900]	19	20	2-146479-0
47.85 [1.884]	45.72 [1.800]	18	19	1-146479-9
45.31 [1.784]	43.18 [1.700]	17	18	1-146479-8
42.77 [1.684]	40.64 [1.600]	16	17	1-146479-7
40.23 [1.584]	38.10 [1.500]	15	16	1-146479-6
37.69 [1.484]	35.56 [1.400]	14	15	1-146479-5
35.15 [1.384]	33.02 [1.300]	13	14	1-146479-4
32.61 [1.284]	30.48 [1.200]	12	13	1-146479-3
30.07 [1.184]	27.94 [1.100]	11	12	1-146479-2
27.53 [1.084]	25.40 [1.000]	10	11	1-146479-1
24.99 [.984]	22.86 [.900]	9	10	1-146479-0
22.45 [.884]	20.32 [.800]	8	9	146479-9
19.91 [.784]	17.78 [.700]	7	8	146479-8
17.37 [.684]	15.24 [.600]	6	7	146479-7
14.83 [.584]	12.70 [.500]	5	6	146479-6
12.29 [.484]	10.16 [.400]	4	5	146479-5
9.75 [.384]	7.62 [.300]	3	4	146479-4
7.21 [.284]	5.08 [.200]	2	3	146479-3
4.67 [.184]	2.54 [.100]	1	2	146479-2
2.13 [.084]	- -	-	1	146479-1
G	F	E	NO. OF POSITIONS	PART NUMBER

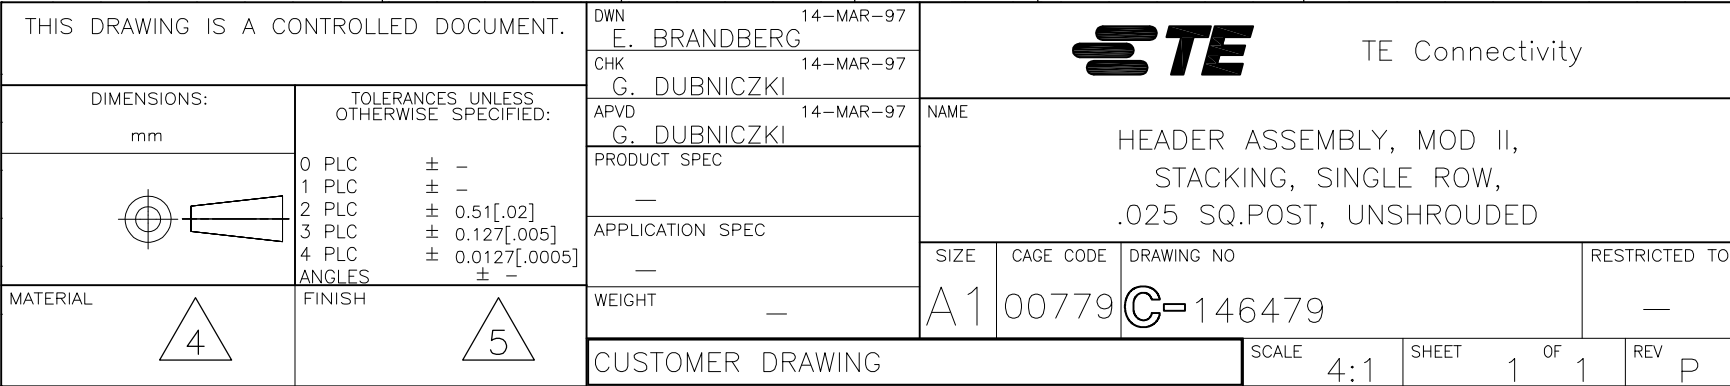

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-146479-4](#)