
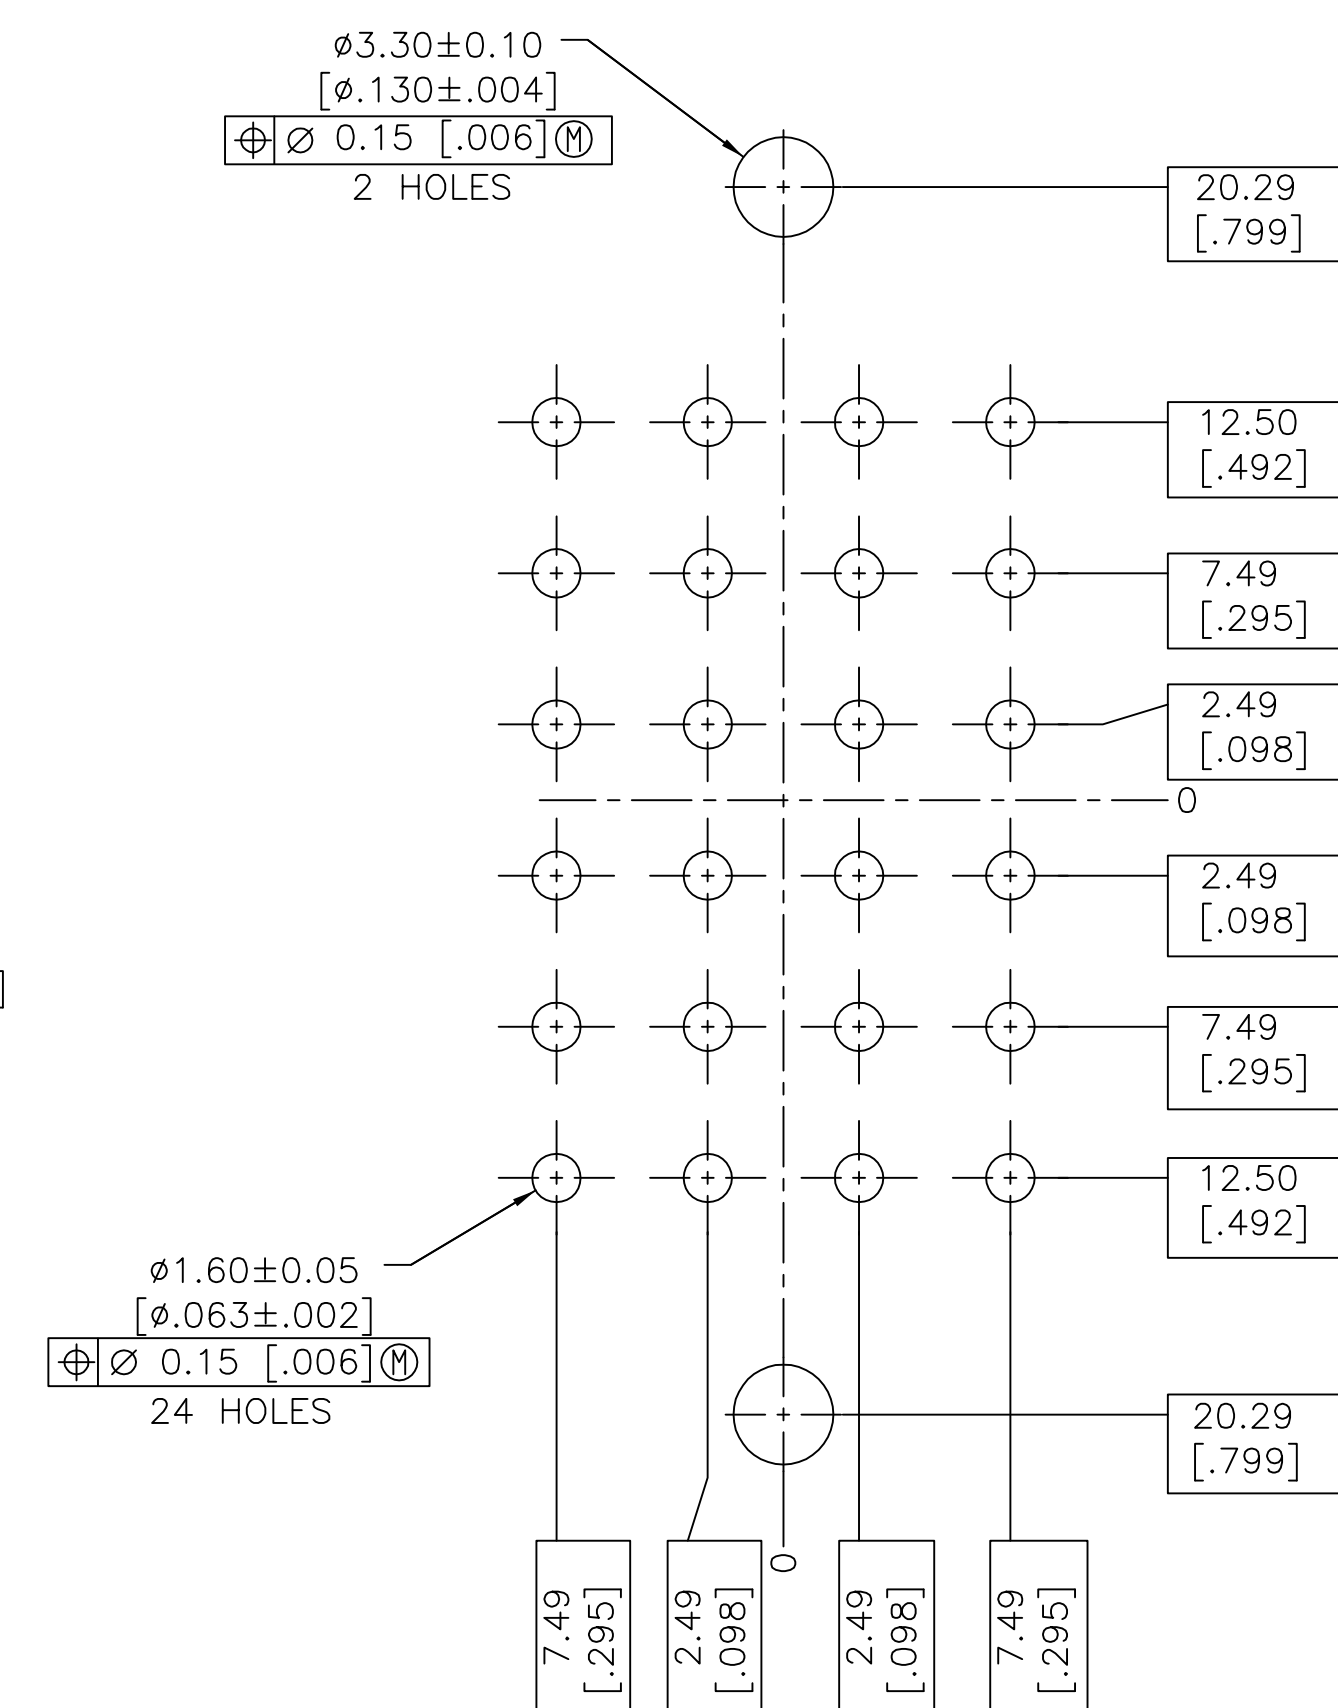
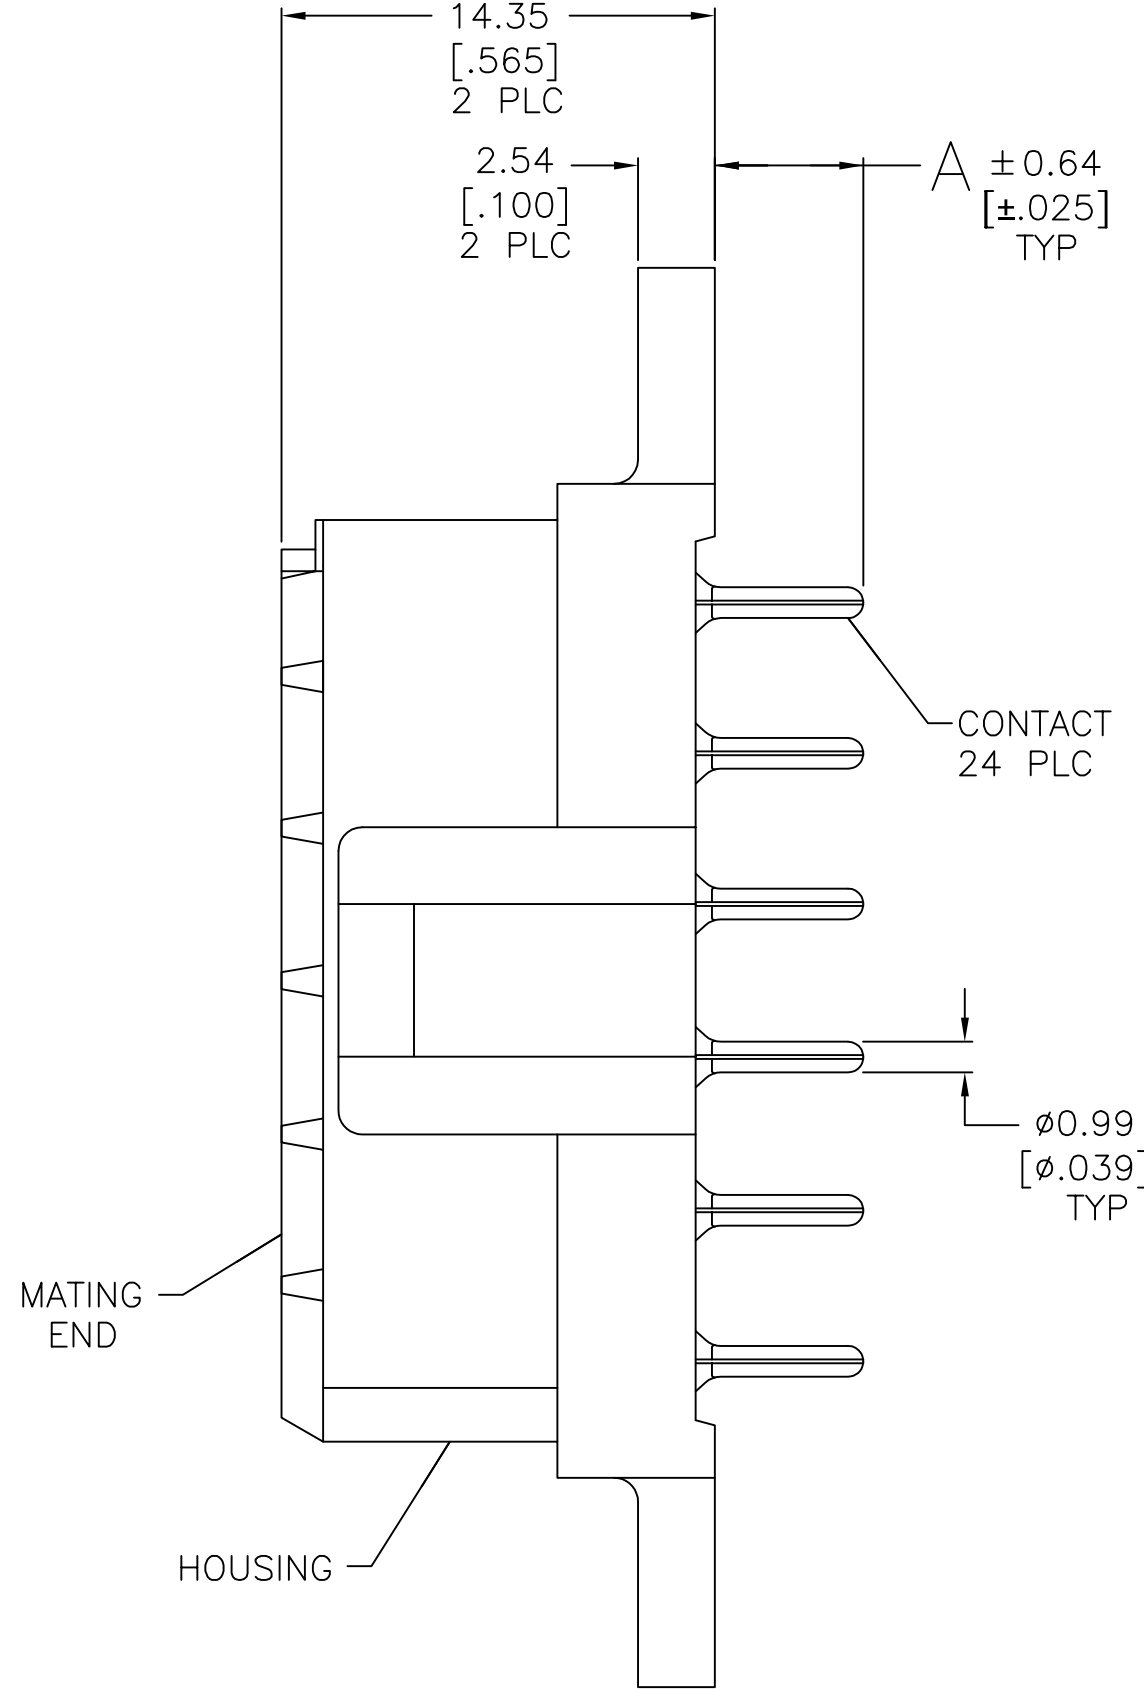


D

C

B


A

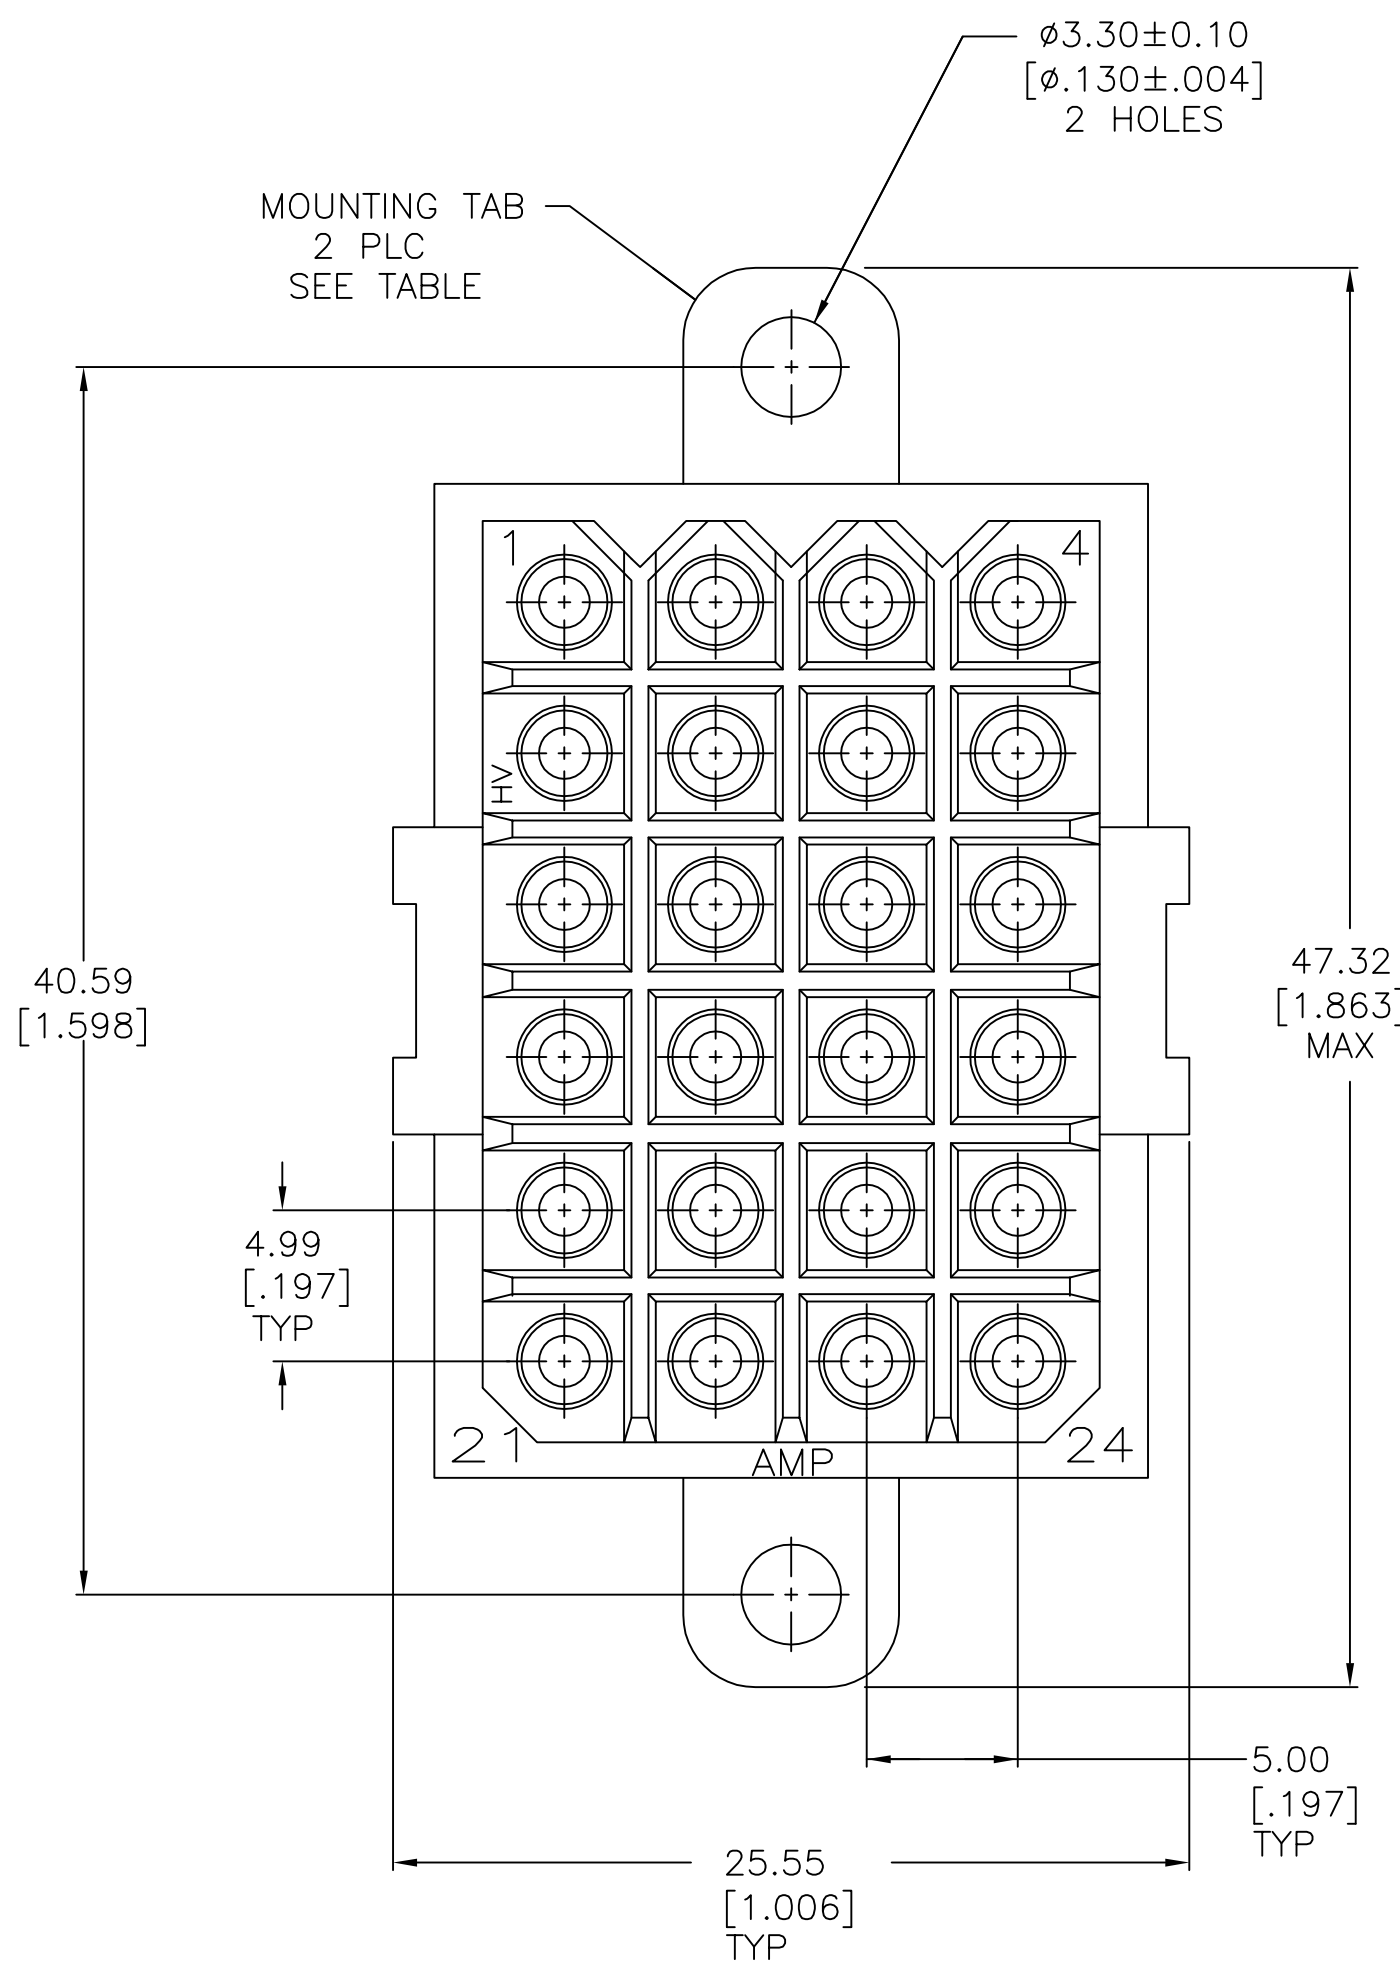

RECOMMENDED LAYOUT

- 1 NYLON, UL 94-V0 RATED, RED.
- 2 PHOSPHOR BRONZE.
- 3 3.81µm [.000150] MIN TIN-LEAD OVER 1.27µm [.000050] MIN NICKEL.
- 4 0.76µm [.000030] MIN GOLD FOR A LENGTH OF 4.95 [.195] MIN FROM MATING END 3.81µm [.000150] MIN TIN-LEAD FOR A LENGTH OF 4.88 [.192] MIN ON OPPOSITE END, BOTH OVER 1.27µm [.000050] MIN NICKEL.
- 5 3.81µm [.000150] MIN TIN OVER 1.27µm [.000050] MIN NICKEL.
- 6 0.76µm [.000030] MIN GOLD FOR A LENGTH OF 4.95 [.195] MIN FROM MATING END 3.81µm [.000150] MIN TIN FOR A LENGTH OF 4.88 [.192] MIN ON OPPOSITE END, BOTH OVER 1.27µm [.000050] MIN NICKEL.

OBSOLETE	4.60	[.181]	6	NO	4-207532-1-
	4.60	[.181]	6	YES	1-207532-0
	4.60	[.181]	5	NO	207532-9
	4.60	[.181]	5	YES	207532-8
OBSOLETE	9.68	[.381]	3	NO	-207532-7-
OBSOLETE	4.60	[.181]	4	NO	207532-4
OBSOLETE	4.60	[.181]	4	YES	207532-3
OBSOLETE	4.60	[.181]	3	NO	207532-2
OBSOLETE	4.60	[.181]	3	YES	207532-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L:SIPE 03/19/92 CHK R:STONE 3-25-92	 TE Connectivity	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD A:TRAVIS 3-25-92	NAME
		0 PLC ± -	PRODUCT SPEC	
		1 PLC ± -	108-10033	
		2 PLC ± 0.25 [.010]	APPLICATION SPEC	
		3 PLC ± -	SIZE	
		4 PLC ± -	CAGE CODE	
ANGLES ± -		DRAWING NO		RESTRICTED TO
FINISH CONTACT: SEE TABLE		A1 00779 ©=207532		—
MATERIAL HOUSING: 1		WEIGHT —		CUSTOMER DRAWING
		SCALE 4:1		SHEET 1 OF 1
				REV

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[207532-9](#)