

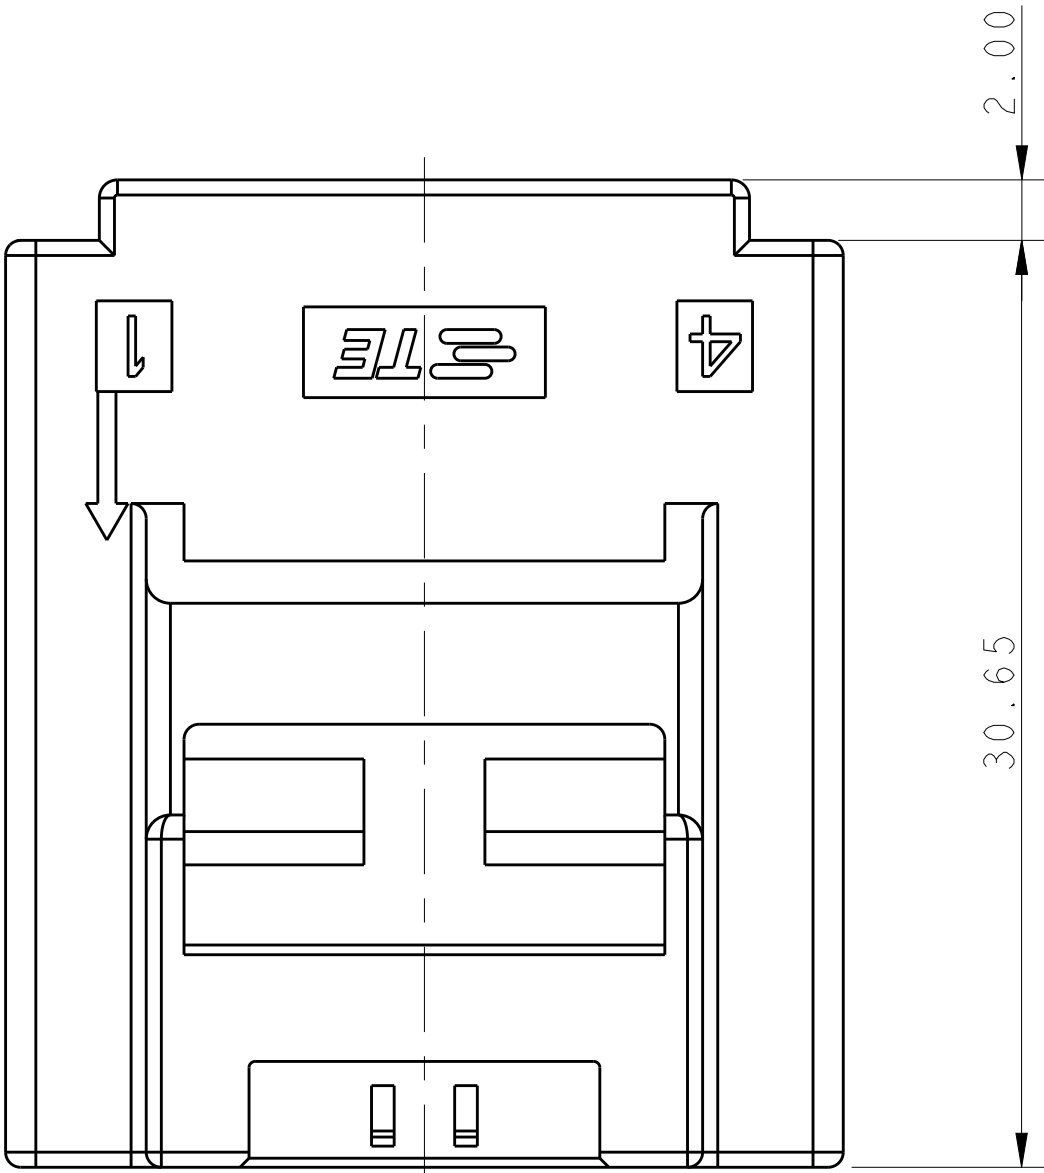
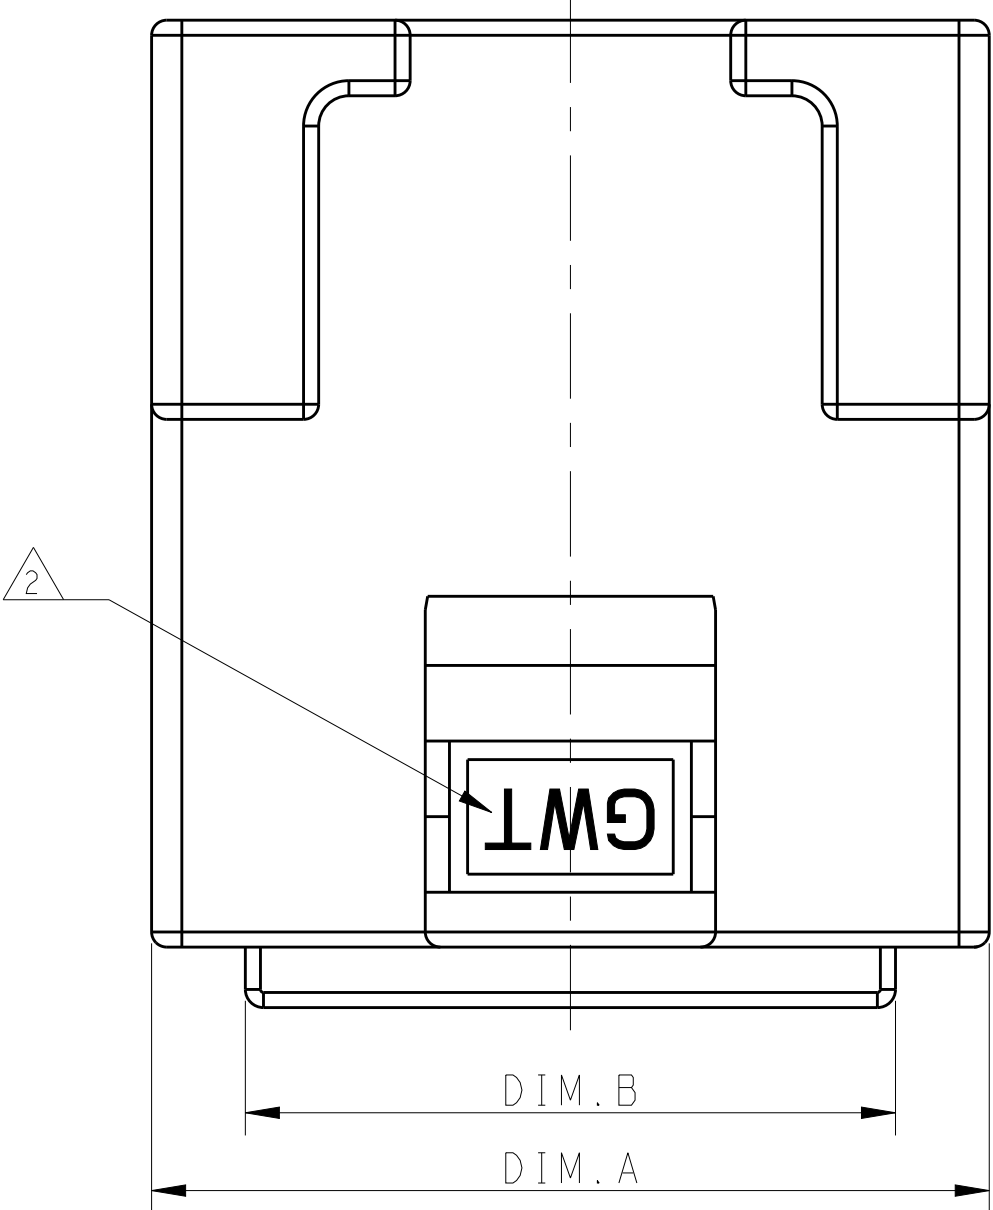
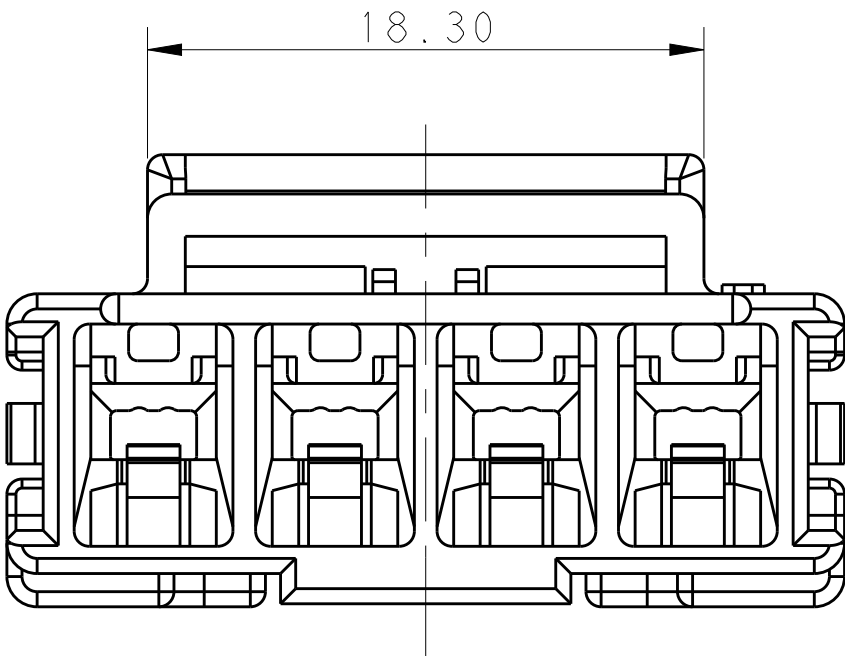


LOC		DIST		REVISIONS				
P	LTR	DESCRIPTION			DATE	DWN	APVD	
	B	REVISED PER ECR-16-003314			18JUL2016	BW	GJ	
	-	-			-	-	-	

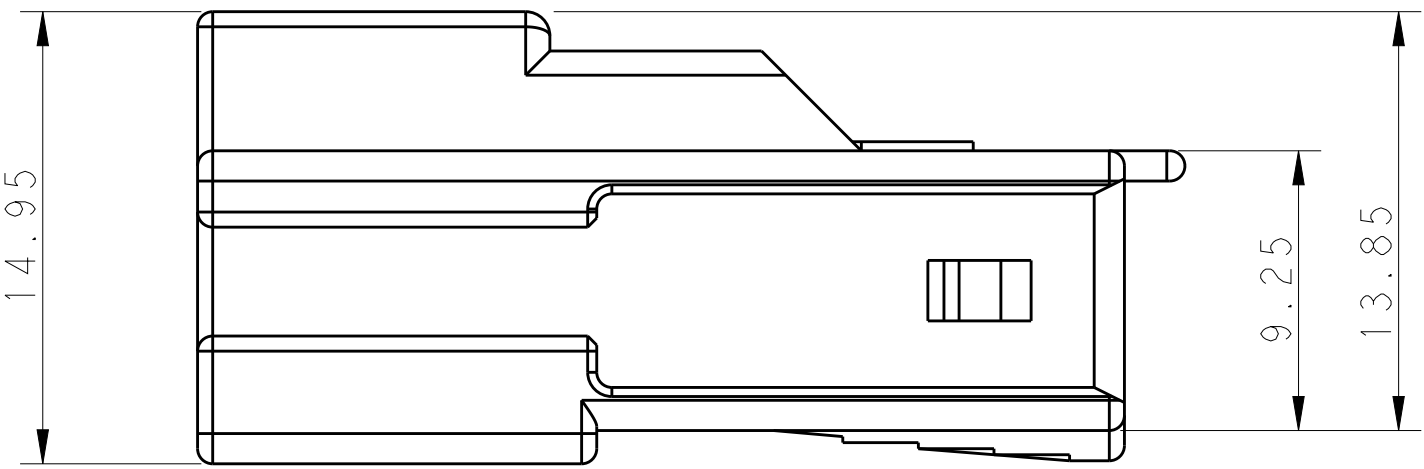

POS.	DIM.A	DIM.B	DIM.C
1*5	33.70	27.50	31.30
1*4	27.70	21.50	25.30
1*3	21.70	15.50	19.30
1*2	15.70	9.50	13.30








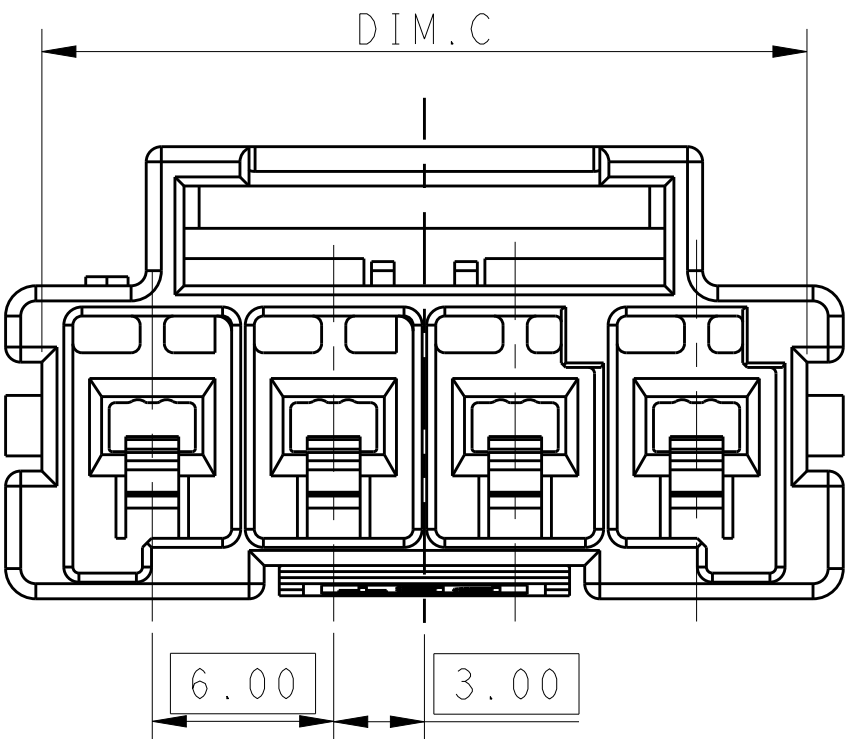


1. MATERIAL:
LEVEL A:PA6 GLASS FILLED,COMPLY WITH GLOW WIRE REQUIREMENTS FOR PARTS OF
NON-METALLIC MATERIAL SUPPORTING A CURRENT-CARRYING CONNECTION
DETAILED IN IEC 60335-1, SECTION 30 (GWT),UL 94V-0
LEVEL B:PBT GLASS FILLED,HOT WIRE IGNITION (HWI) VERSION ARE MOLDED IN
A RESIN THAT COMPLIES WITH TE HOT WIRE IGNITION TEST 109-32026
AND ARE RECOMMENDED FOR USE WITH HWI HOUSINGS THAT ALSO COMPLY,
UL 94V-0
2. MATERIAL MARK:
LEVEL A:GWT,LEVEL B:HWT
3. APPLICABLE CONTACT P/N
TAB CONTACT:1971238/1971780/82/84/86/88-*,2238067-*
4. MATING CONN, P/N
PLUG HSG:*-2232265-
TPA (LOCK PLATE):*-1971777-*



5. This product has not completed validation testing.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN TOMMY WU 26MAR2013	 TE Connectivity	
		CHK HAPYE WU 26MAR2013		
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD YUZHONG MAO 26MAR2013	NAME CAP HOUSING,FREE HANGING,SINGLE ROW POWER TRIPLE LOCK	
		PRODUCT SPEC 108-106118	SIZE A100779	
	0 PLC ± 1 PLC ±0.35 2 PLC ±0.25 3 PLC ± 4 PLC ± ANGLES ± FINISH	APPLICATION SPEC 114-106118	DRAWING NO C=2232358	
		WEIGHT -	RESTRICTED TO -	
MATERIAL -		Customer Drawing		
		SCALE -		
		SHEET 1 OF 2		
		REV B		

LOC		DIST		REVISIONS					
-		-		P	LTR	DESCRIPTION	DATE	DWN	APVD
				-	-	SEE SHEET 1	-	-	-

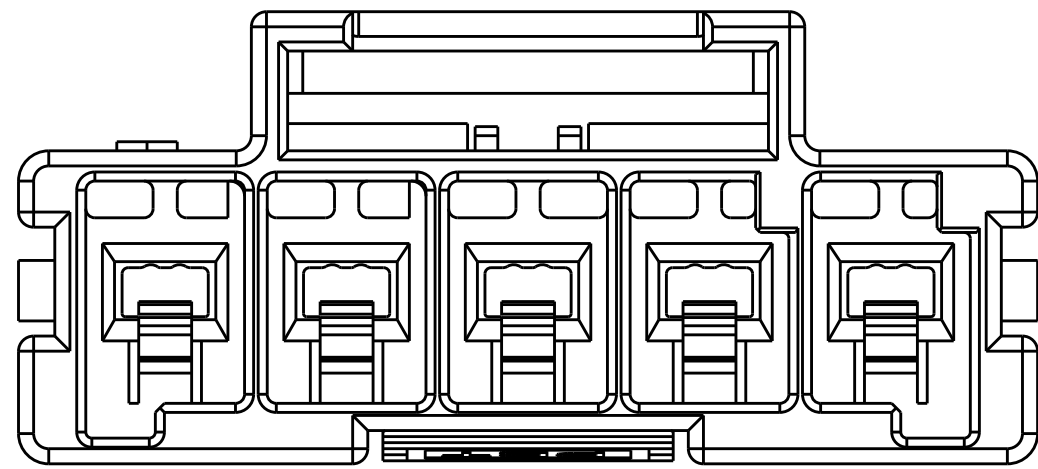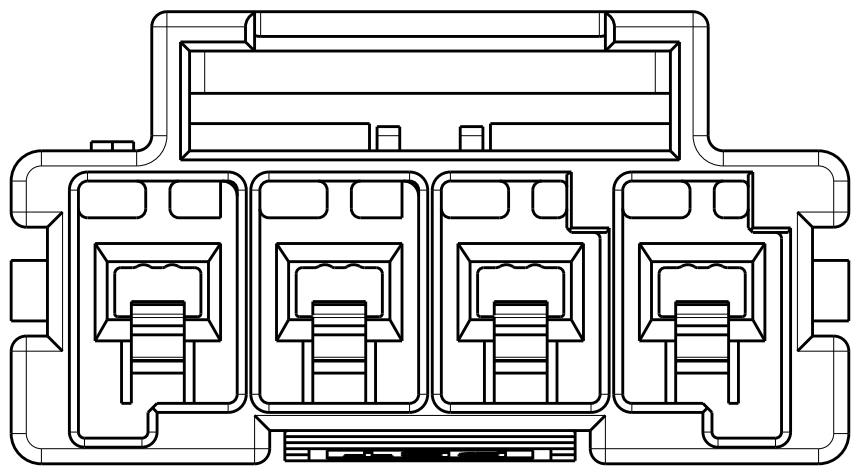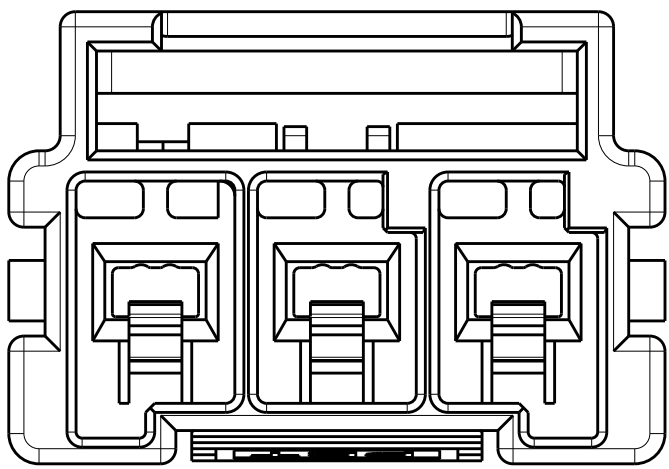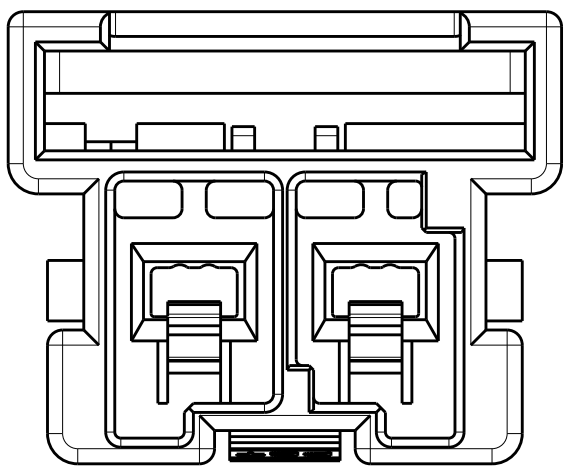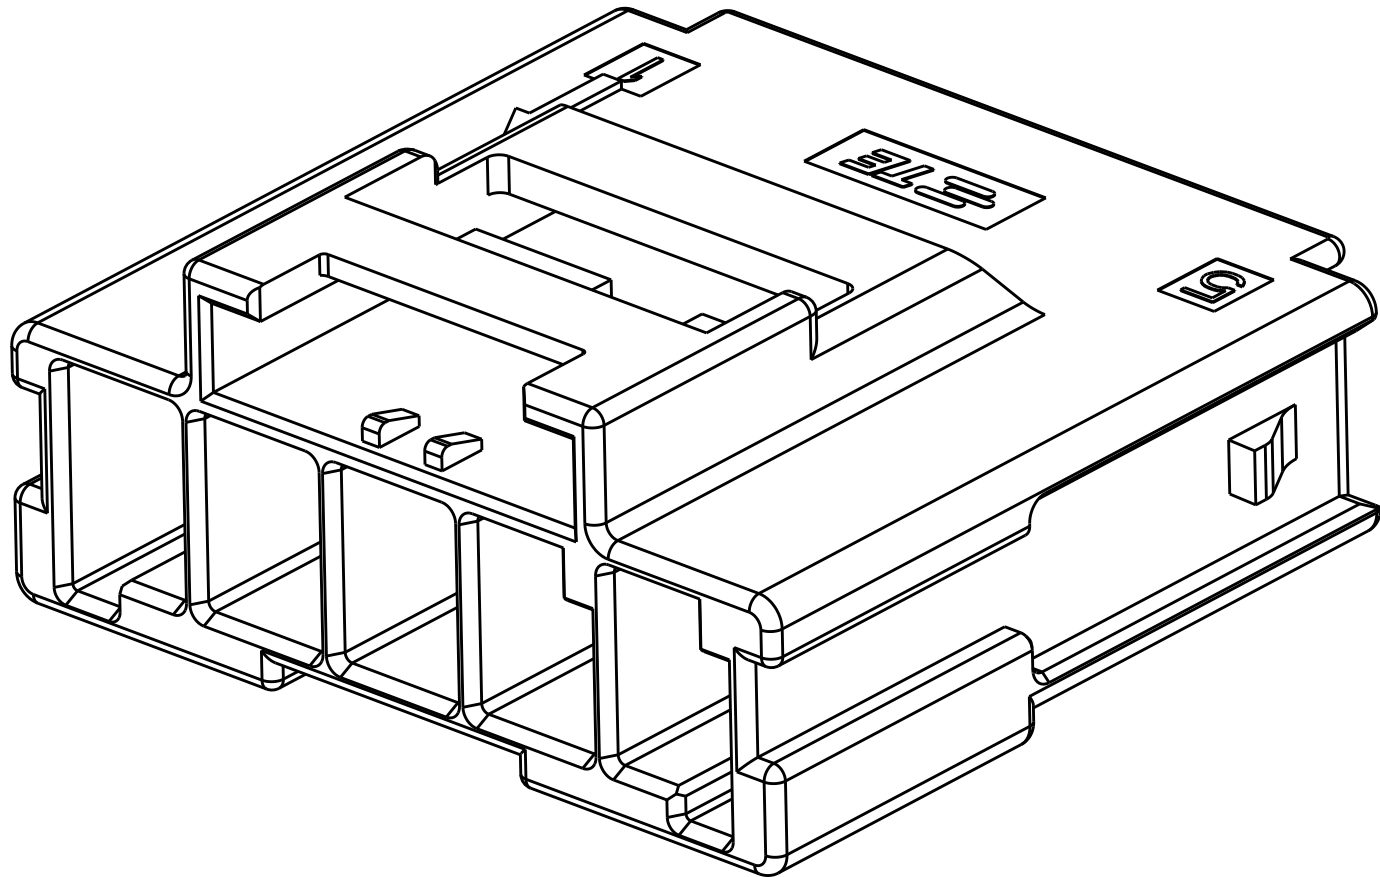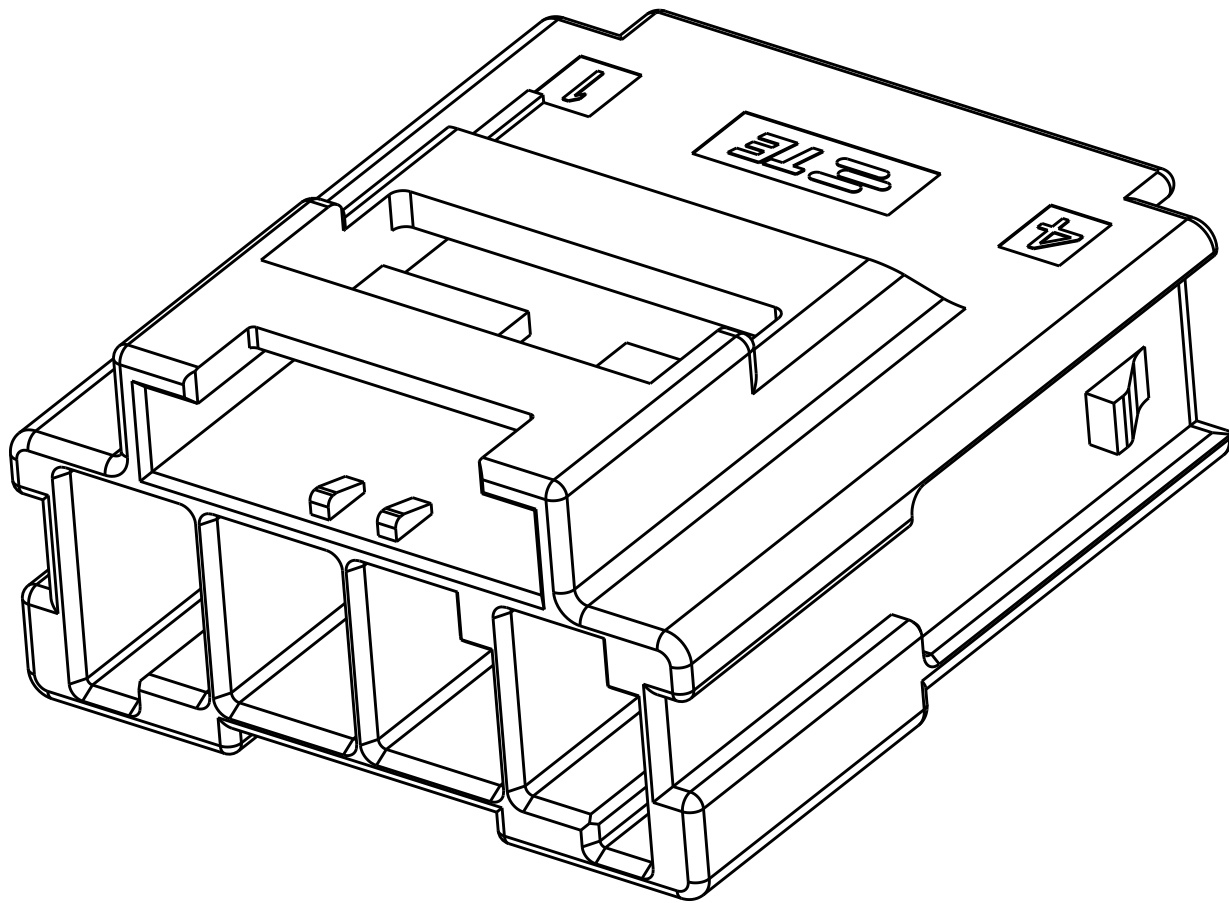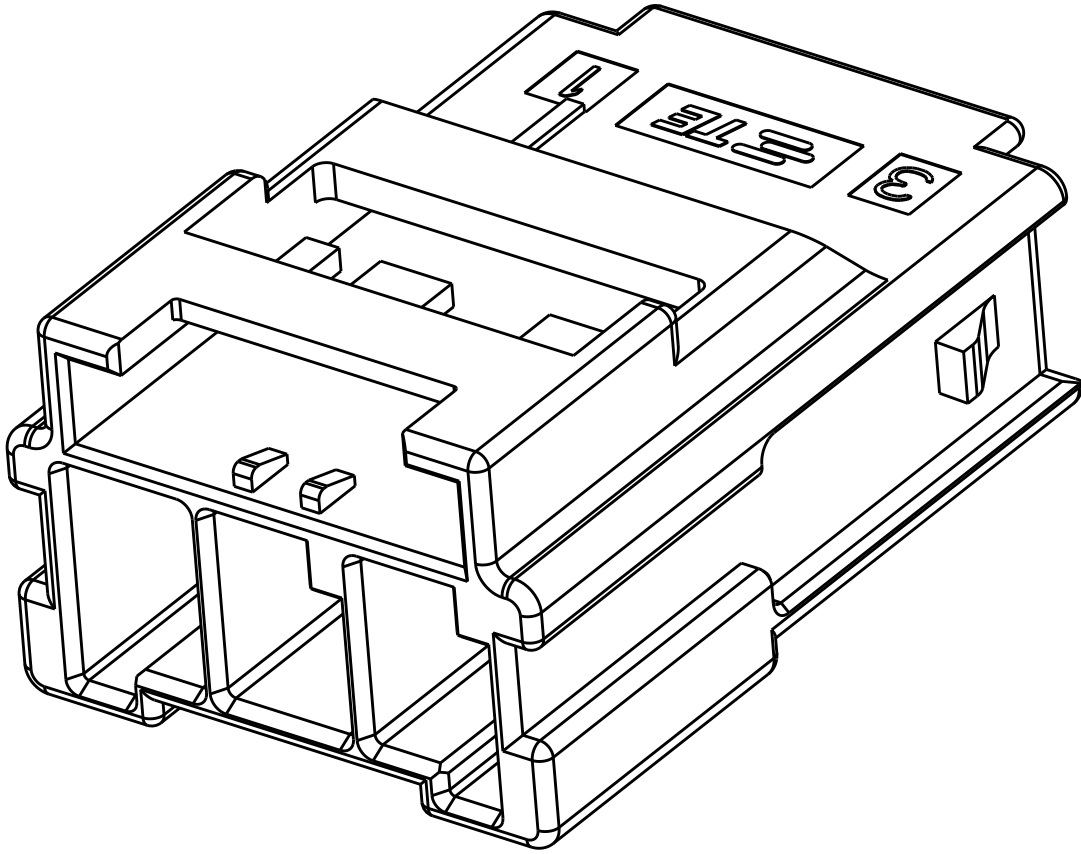
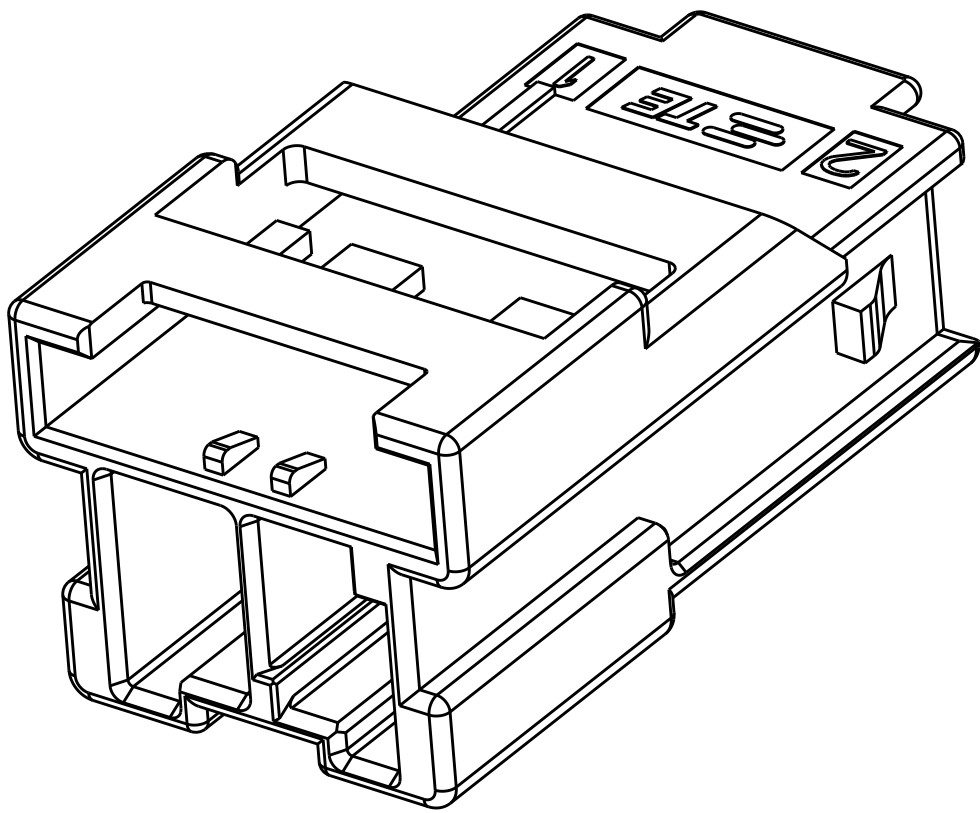


1*2 POSITIONS

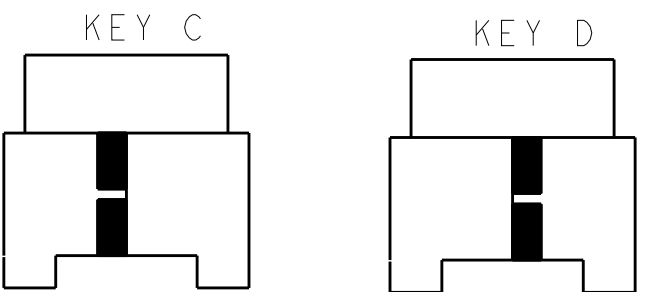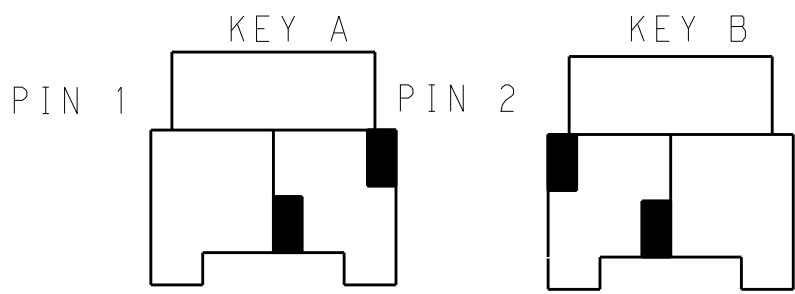



KEYING FOR 1*2 POS.

1*3 POSITIONS

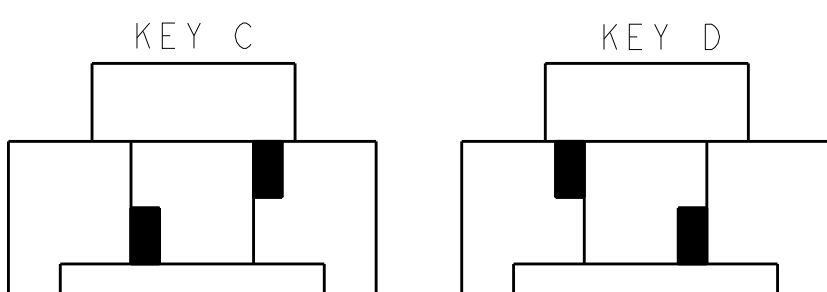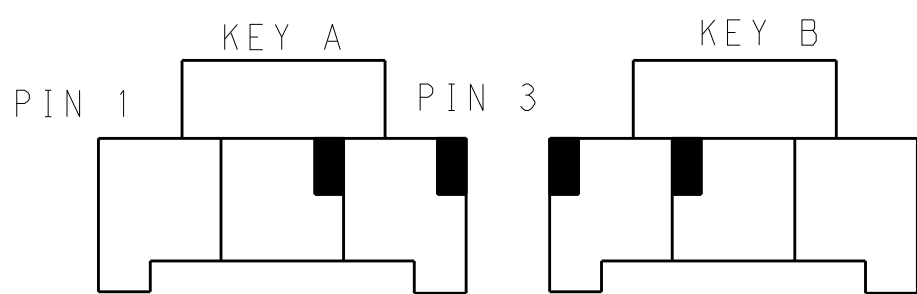



KEYING FOR 1*3 POS.

1*4 POSITIONS

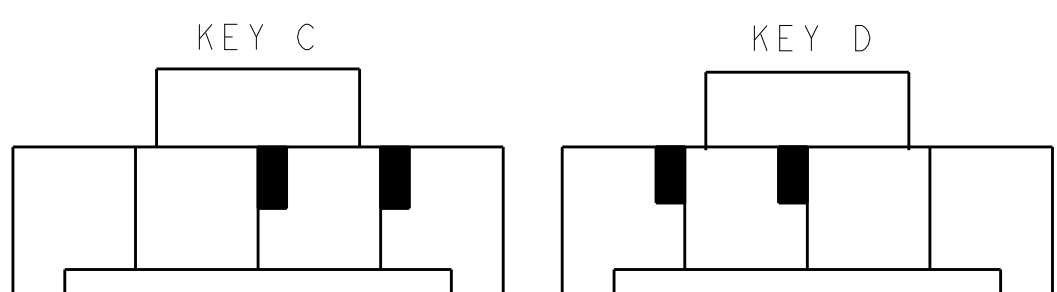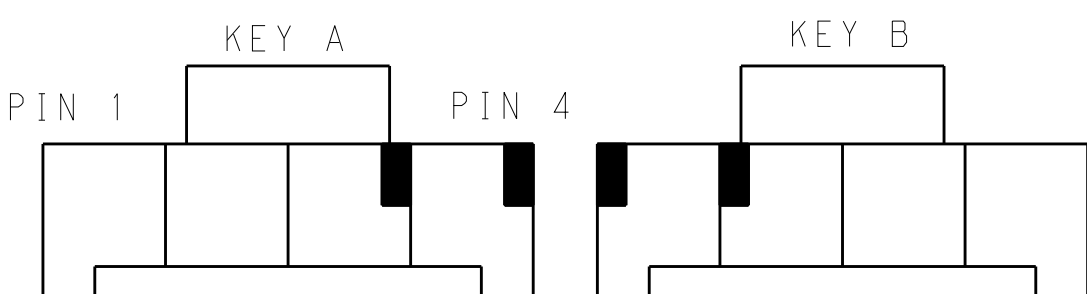

KEYING FOR 1*4 POS.

1*5 POSITIONS

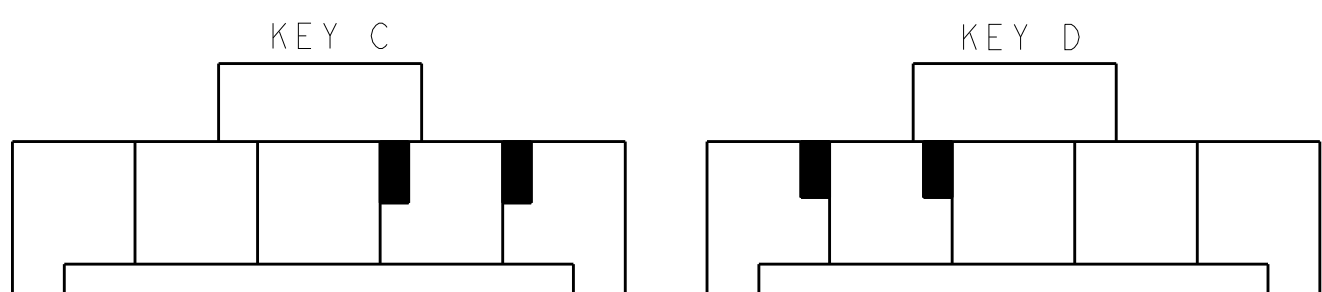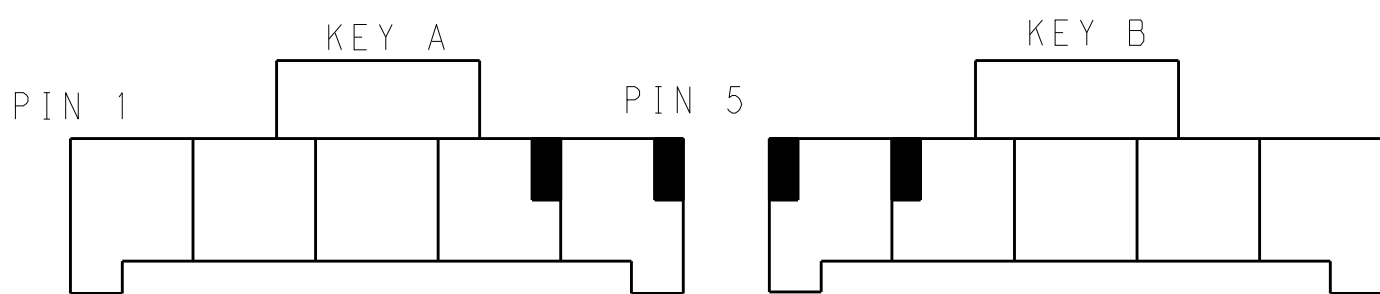

KEYING FOR 1*5 POS.

1*5	LEVEL A	DARK GREY	KEY A	5-2232358-7
		BROWN	KEY B	6-2232358-7
		GREEN	KEY C	7-2232358-7
		ORANGE	KEY D	8-2232358-7
1*4	LEVEL A	DARK GREY	KEY A	5-2232358-4
		BROWN	KEY B	6-2232358-4
		GREEN	KEY C	7-2232358-4
		ORANGE	KEY D	8-2232358-4
	LEVEL B	BLACK	KEY A	1-2232358-3
		DARK GREY	KEY A	5-2232358-3
		BROWN	KEY B	6-2232358-3
		GREEN	KEY C	7-2232358-3
1*3	LEVEL A	ORANGE	KEY D	8-2232358-3
		DARK GREY	KEY A	5-2232358-2
		BROWN	KEY B	6-2232358-2
		GREEN	KEY C	7-2232358-2
1*2	LEVEL A	ORANGE	KEY D	8-2232358-2
		DARK GREY	KEY A	5-2232358-2
		BROWN	KEY B	6-2232358-2
		GREEN	KEY C	7-2232358-2
POS.	MATERIAL	COLOR	KEY	P/N

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
TOMMY.WU
26MAR2013

CHK
HAPYE.WU
26MAR2013

APVD
YUHHONG.MAO
26MAR2013

DIMENSIONS:

mm

0 PLC ±.035
1 PLC ±0.25
2 PLC ±.035
3 PLC ±.035
4 PLC ±.035
ANGLES ±.035
FINISH

TOLERANCES UNLESS OTHERWISE SPECIFIED:

PRODUCT SPEC
108-106118
APPLICATION SPEC
114-106118
WEIGHT
Customer Drawing

NAME
CAP HOUSING, FREE HANGING, SINGLE ROW
POWER TRIPLE LOCK

SIZE
A100779

CAGE CODE
C=2232358

DRAWING NO
2232358

RESTRICTED TO
-

SCALE
-

SHEET
2

OF
2

REV
B

TE Connectivity

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[6-2232358-3](#)