

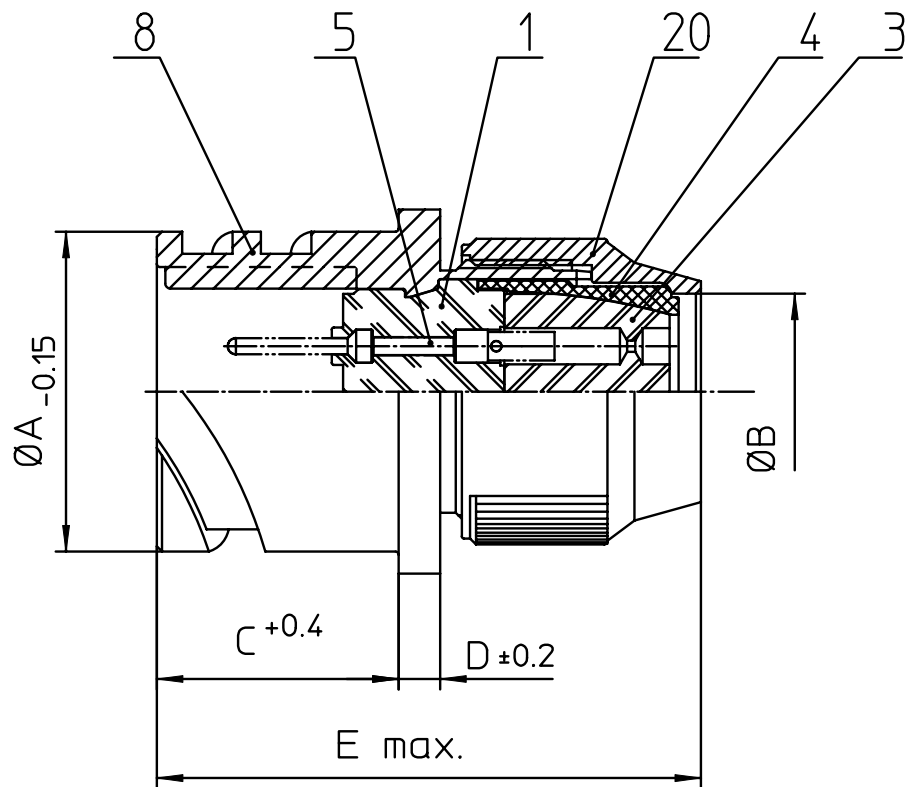




| NO. | BESCHREIBUNG / DESCRIPTION          |
|-----|-------------------------------------|
| 1   | ISOLIERKÖRPER STIFT / INSULATOR PIN |
| 3   | DICHTKÖRPER / GROMMET               |
| 4   | ENDRING / ENDRING                   |
| 5   | KONTAKTSTIFT/ CONTACT PIN           |
| 8   | DOSENGEHÄUSE / SHELL                |
| 20  | KURZES ENDGEHÄUSE/SHORT ENDBELL     |

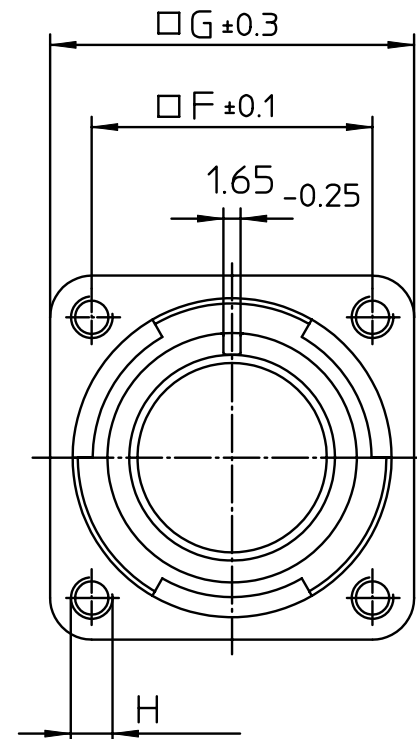

| NO. | MASSE / DIMENSION |
|-----|-------------------|
| A   | 18.2              |
| B   | 9.6               |
| C   | 18.2              |
| D   | 2.8               |
| E   | 43.5              |
| F   | 18.2              |
| G   | 25.4              |
| H   | M4                |

Note: Due to an automatic nomenclature system, numbers generated may not be sequential.  
 Specification and Dimensions subject to change  
 Drawings illustrate normal insulator positioning

|                                                              |
|--------------------------------------------------------------|
| Material Specification:                                      |
| Shell Material: Aluminium alloy                              |
| Shell Plating: Olive drab chromate over cadmium (conductive) |
| Insulator Material: CR-Elastomere                            |
| Contact Material: Copper alloy                               |
| Contact Plating: Gold 0,5 µm                                 |

|                                                                                                                                                                                     |                                                                                                                                                             |                         |                             |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|-----------------------------|
| all dimensions are in mm<br>Dimensions without tolerance indications are general tolerances in acc. with DIN7168m                                                                   |                                                                                                                                                             | drawing for<br>CUSTOMER |                             |
| <br><b>ITT</b><br><i>Engineered for life</i><br>ITT CANNON GmbH<br>D - 71384 Weinstadt/Germany | description CA3100R10SL-3P-B-F80-A176<br>Wall mounting receptacle<br>Shortened light-weight endbell without cable clamp<br>AWG Crimp / Pin / Layout: 10SL-3 |                         |                             |
|                                                                                                                                                                                     | © All rights reserved. Reproduction or issue to third in any form<br>whenever is only permitted with written authorization of ITT Cannon                    |                         |                             |
|           |                                                                                                                                                             | page<br>1/1             | revision<br>1840 30. Apr 20 |