

LOC		DIST		REVISIONS				
P	LTR	DESCRIPTION			DATE	DWN	APVD	
		A			NEW RELEASE	09JUL2007	RG	PD

1. PART NUMBER CHANGES AND OR DESIGN CHANGES AFFECTING ITEM INTERCHANGEABILITY REQUIRE PRIOR TYCO ELECTRONICS APPROVAL AND AUTHORIZATION BY REVISION TO THIS DRAWING.

2. MATERIAL:
INSULATORS - THERMOPLASTIC, GLASS REINFORCED, COLOR: BLACK
UL94V-0 FLAMMABILITY RATED.
SIGNAL CONTACTS: PHOSPHOR BRONZE ALLOY
POWER CONTACTS - PHOSPHOR BRONZE ALLOY, COPPER ALLOY
CROWN BANDS: BERYLLIUM COPPER ALLOY




3. FINISH:
CONTACTS - GOLD PLATE 0.76µm MIN. THK., OVER
NICKEL 1.27µm MIN. THK.
SOLDER TAILS, TIN 3.05µm MIN. THK. OVER
NICKEL 1.27µm MIN. THK.

△ ITEMS PROVIDED TO THIS SPECIFICATION TO BE PERMANENTLY IDENTIFIED PER THE FOLLOWING IDENTIFIER LABEL

YEARWEEK

TYCO ELECTRONICS P/NDATE CODE (e.g. 0106)

XXXXXXXX-XXXXX

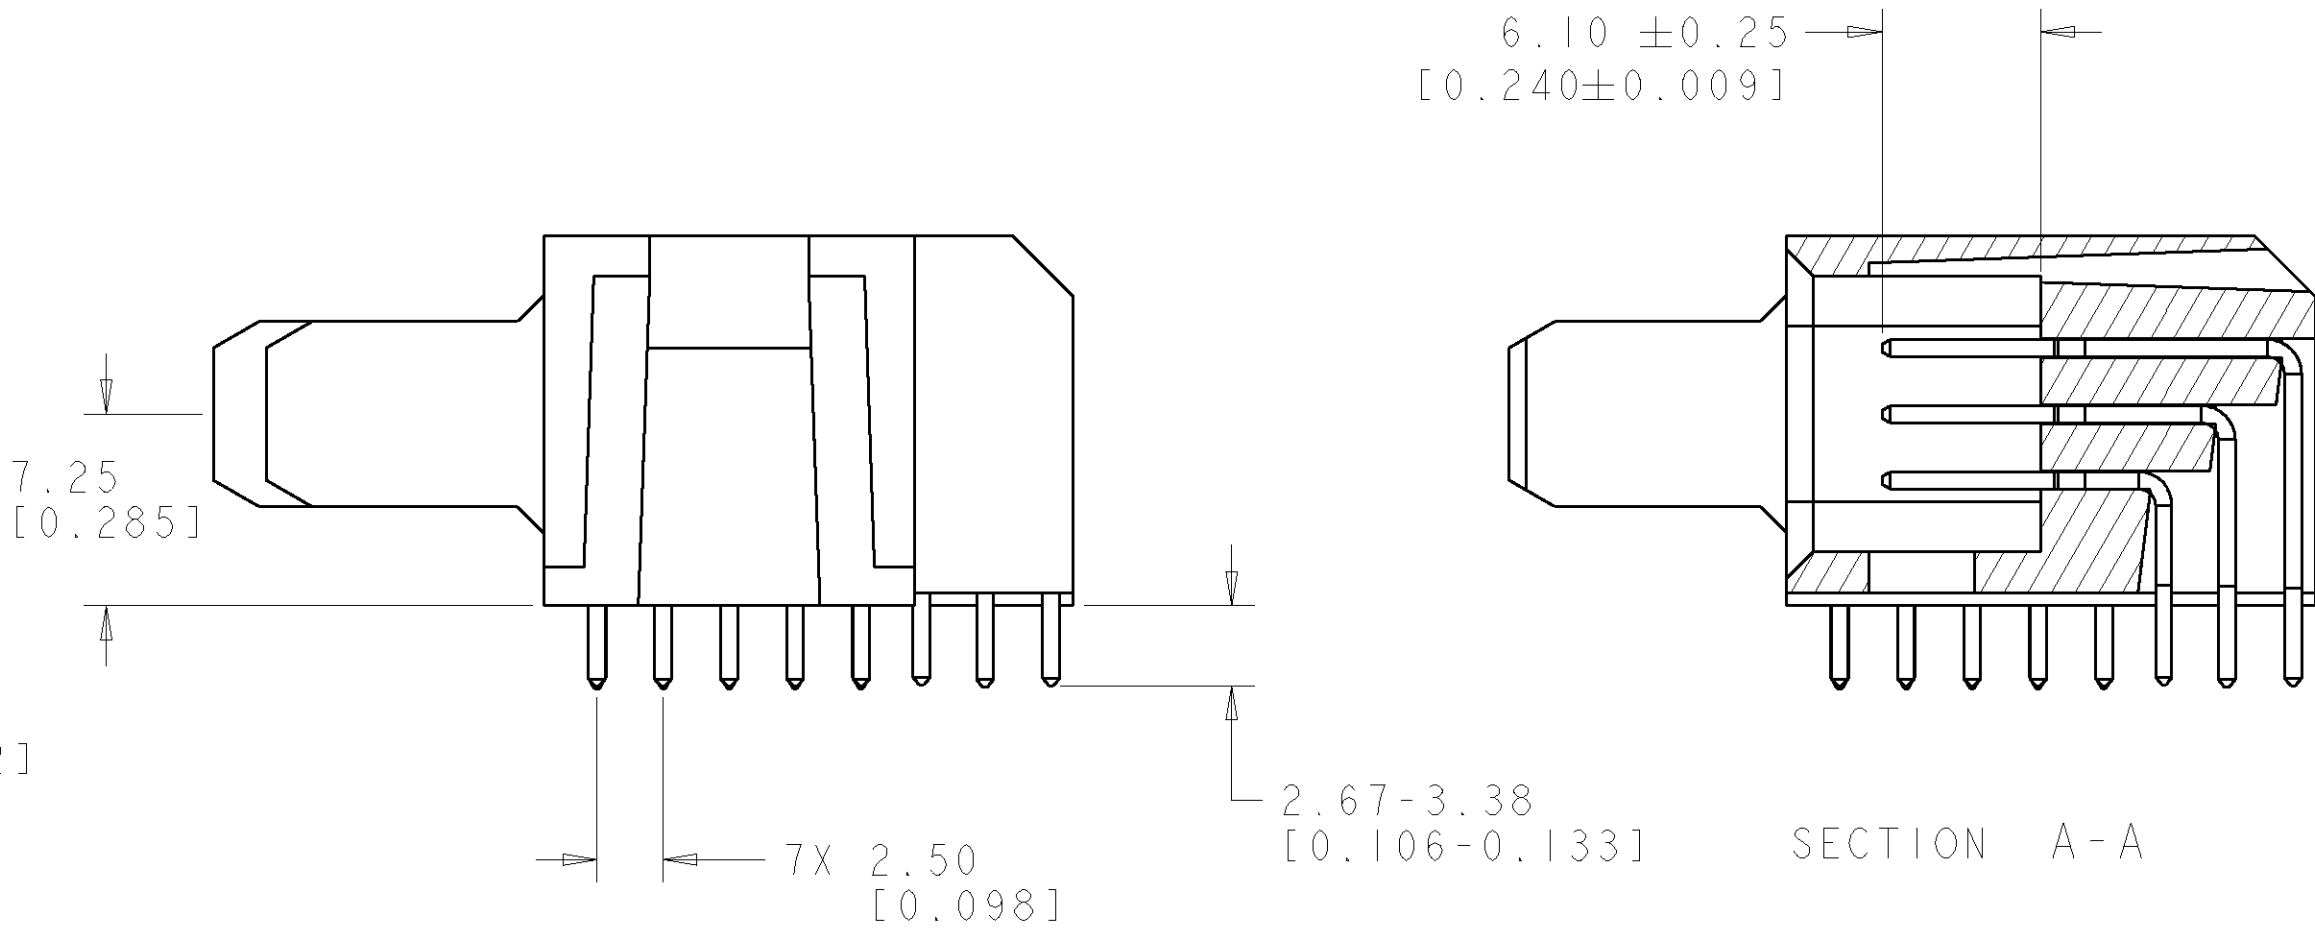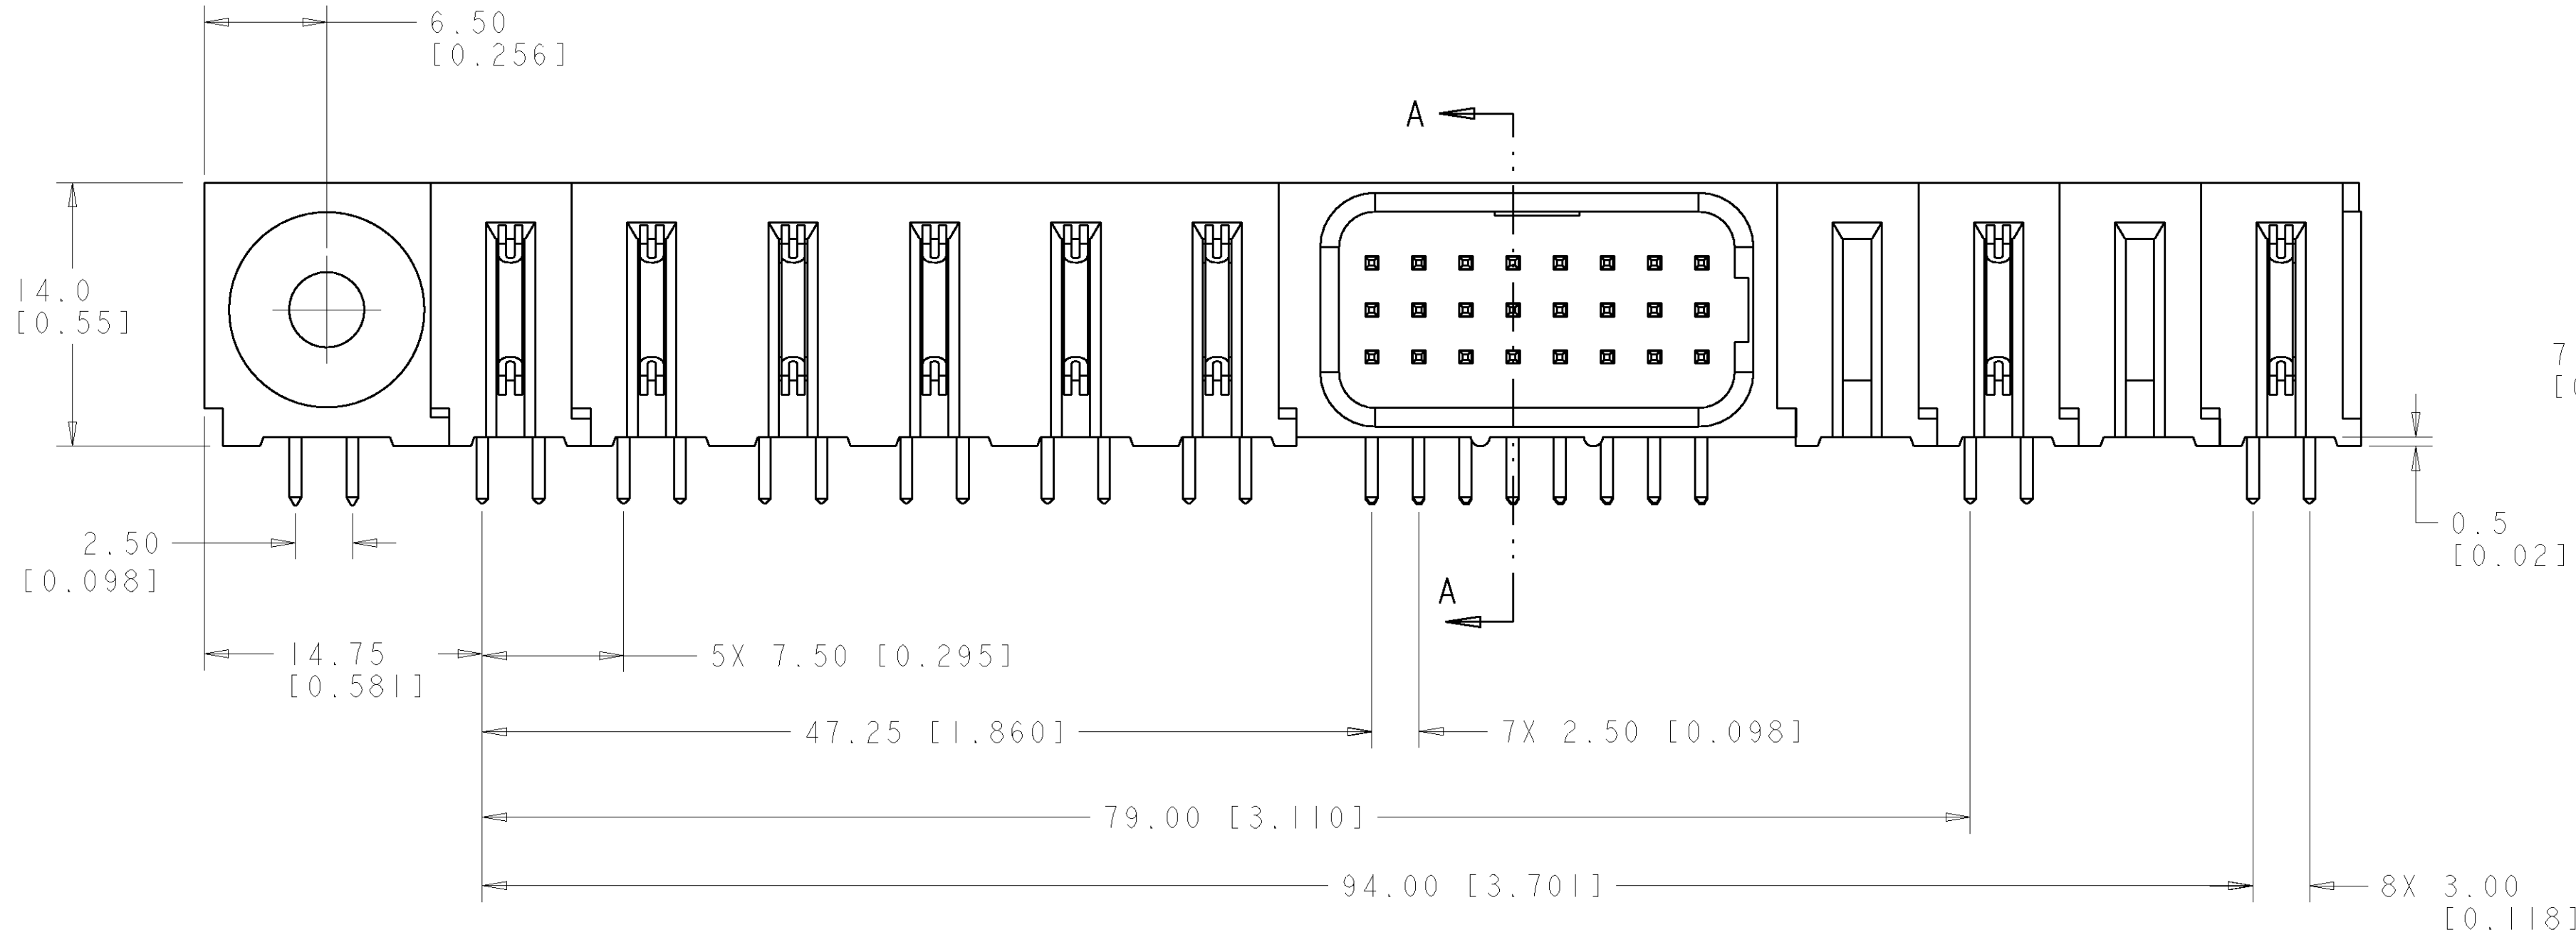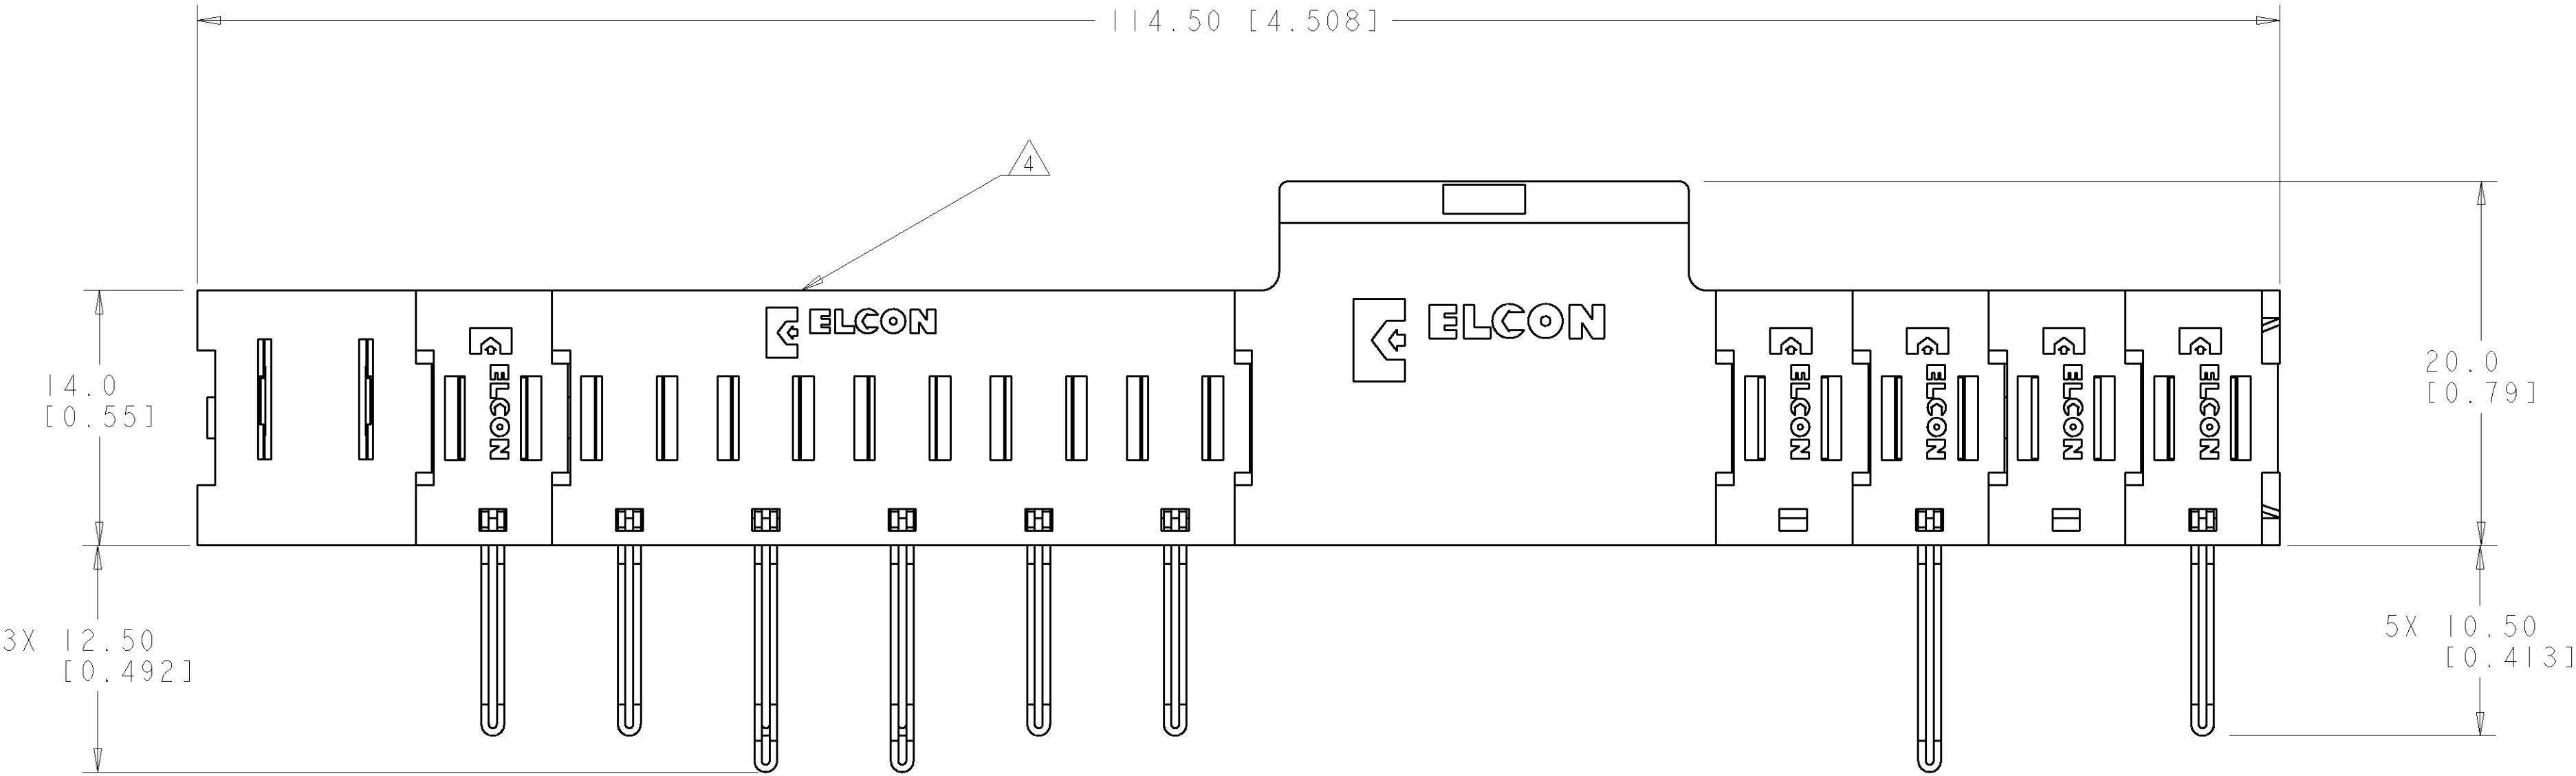


ELCON

FLATPAQ

AS SHOWN		1766717-1	
DESCRIPTION		PART NUMBER	
Tyco Electronics		Tyco Electronics Harrisburg, PA 17105-3608	
NAME		PIN CONNECTOR ASSEMBLY RIGHT ANGLE SOLDER TAILS	
SIZE		CAGE CODE	
A100779		C=1766717	
CUSTOMER DRAWING		RESTRICTED TO	
SCALE		SHEET	
3:1		1 OF 3	
REV		A	

LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

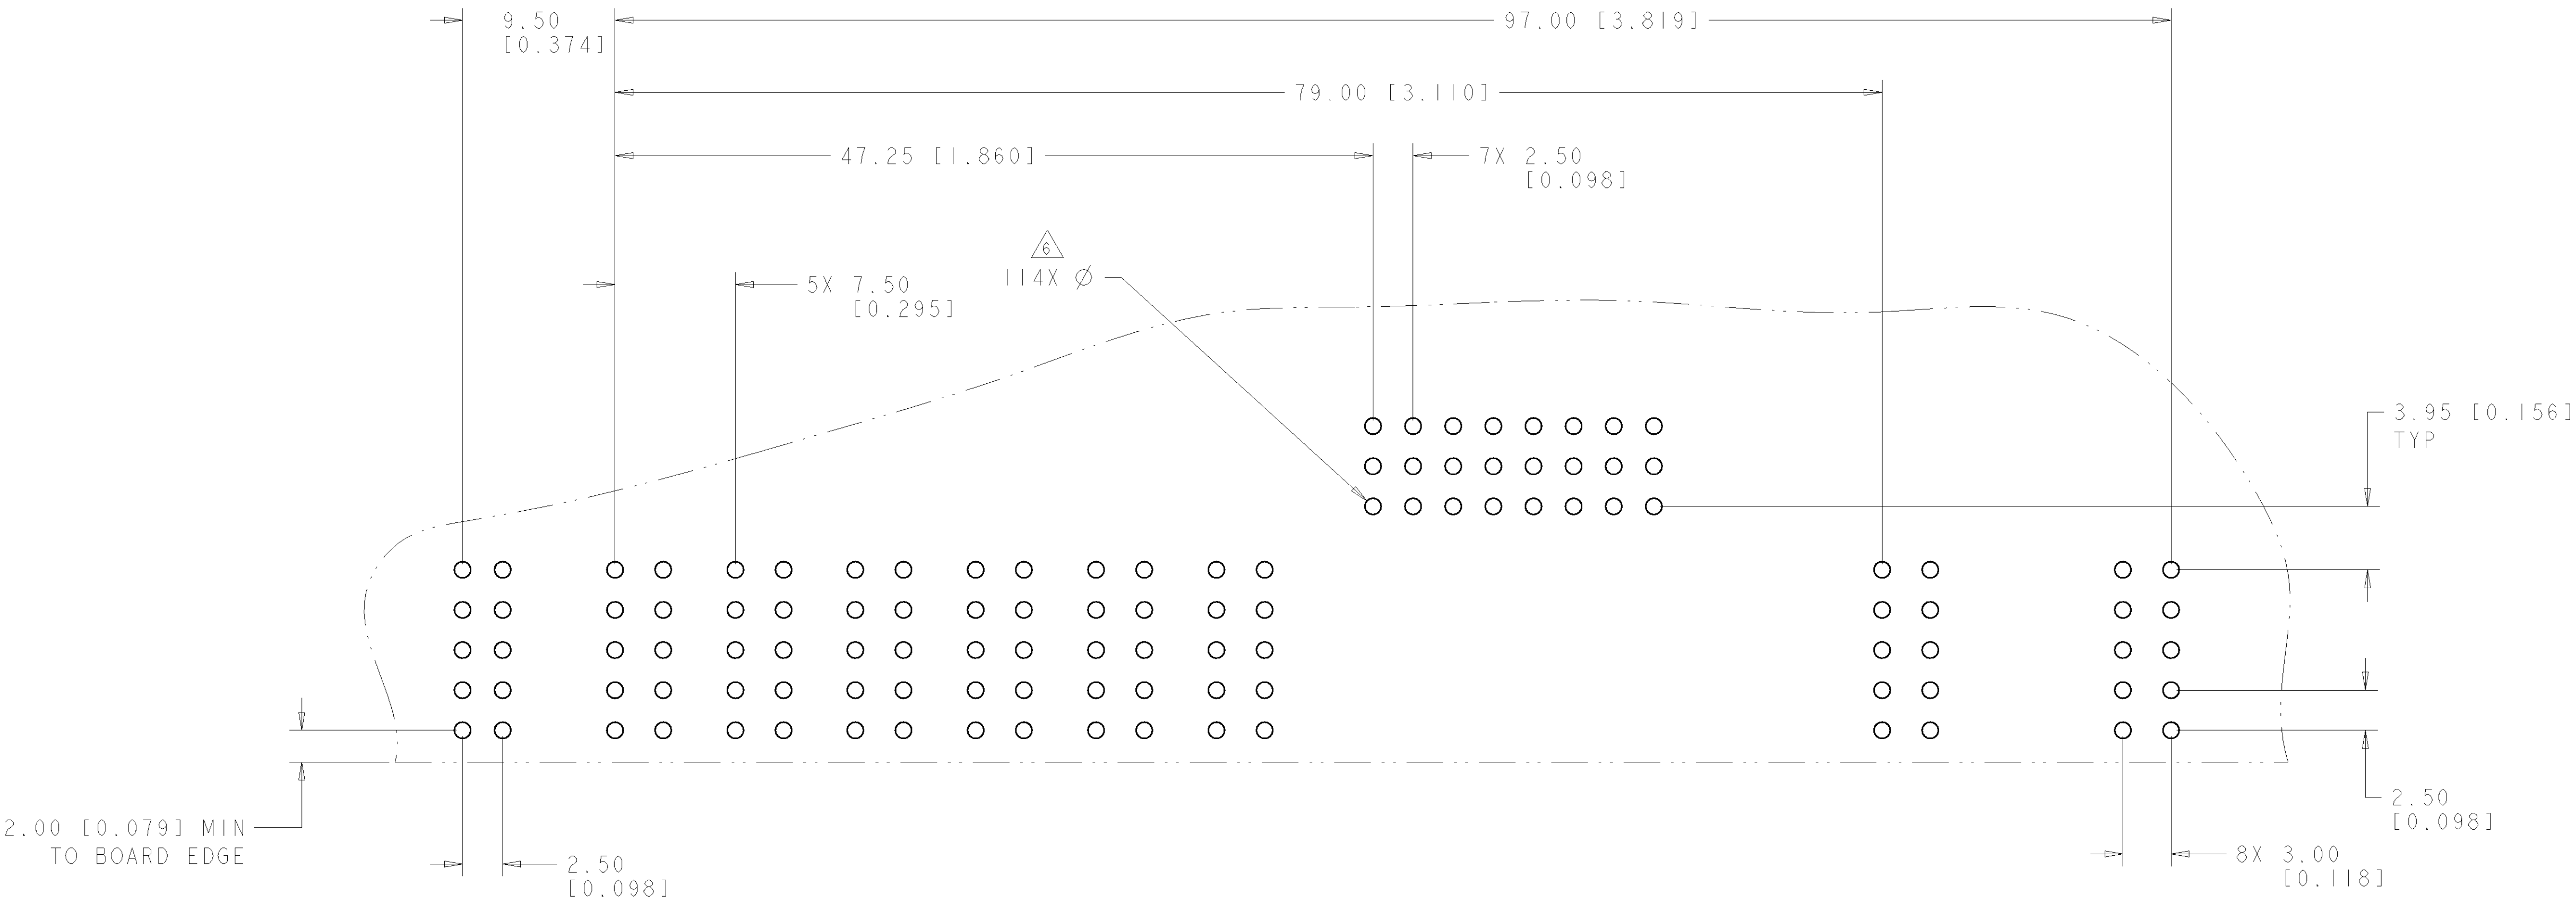


PRINTED CIRCUIT LAYOUT
COMPONENT SIDE


CONNECTOR	CATALOG MODULE #	QTY	SIZE NO.	CONTACT QTY	MATING PIN	MAX. CURRENT (PER CONTACT)	CONTACT SPACING	VOLTAGE RATING
PIN	FP302	1	22	24	.64 [.025] SQ.	3 amps	2.50 [.0984]	125
	FPI52	3	8	3	1.25 X 7.00 [.049 X .276]	35 amps	7.50 [.2953]	250
	FPI51	5	8	5	1.25 X 7.00 [.049 X .276]	35 amps	7.50 [.2953]	250
	FP512	2	SPACER					
	FP516	1	RIGHT ANGLE GUIDE SOCKET					

THIS DRAWING IS UNPUBLISHED. IT IS THE PROPERTY OF TYCO ELECTRONICS CORPORATION. IT IS TO BE USED ONLY FOR THE PURPOSES SPECIFIED. IT IS TO BE RETURNED TO TYCO ELECTRONICS CORPORATION WHEN NO LONGER REQUIRED. IT IS TO BE DESTROYED WHEN NO LONGER REQUIRED. IT IS TO BE DESTROYED WHEN NO LONGER REQUIRED.		DWN R. GRZYBOWSKI 09JULY07	Tyco Electronics Harrisburg, PA 17105-3608	
DIMENSIONS: mm [INCHES]		CHK P. DAMATO 09JULY07	NAME PIN CONNECTOR ASSEMBLY RIGHT ANGLE SOLDER TAILS	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S. FLICKINGER	SIZE A100779	
9 PLC ±.5 [.020] 1 PLC ±.5 [.020] 2 PLC ±.25 [.010] 3 PLC ±.25 [.010] 4 PLC ±.5 ANGLES ±.5		PRODUCT SPEC APPLICATION SPEC	DRAWING NO C=1766717	
MATERIAL -		WEIGHT -	RESTRICTED TO -	
FINISH -		CUSTOMER DRAWING	SCALE 3:1	
			SHEET 2 OF 3	
			REV A	

LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

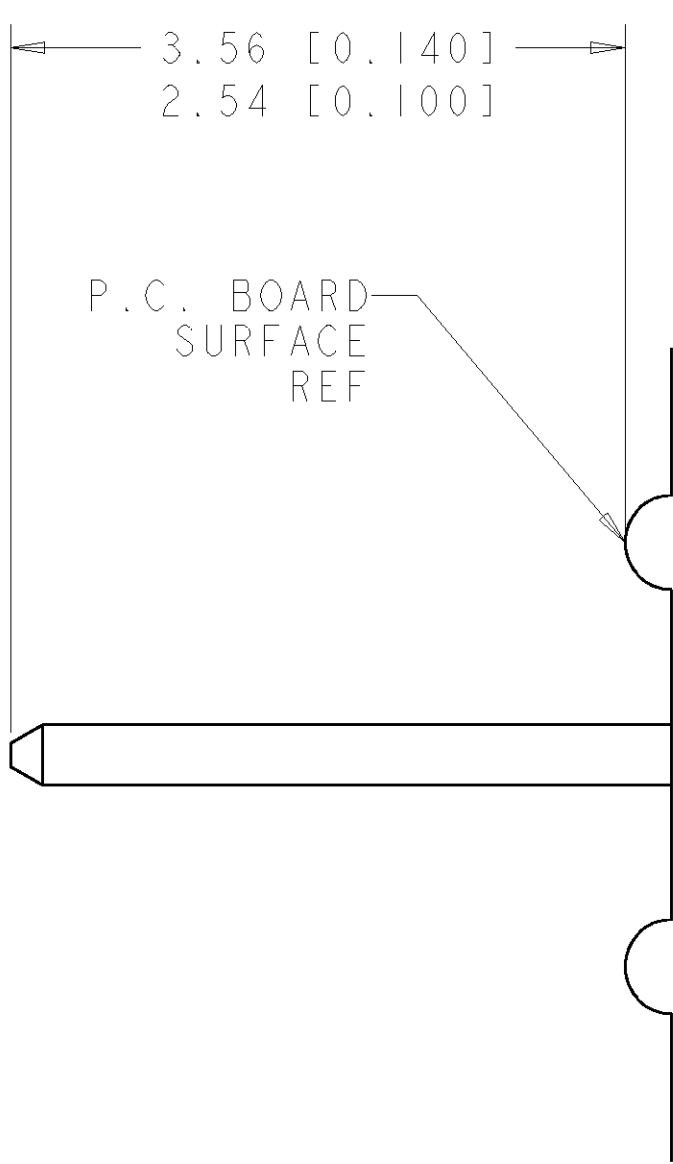

5. SOLDER PIN DETAIL
SCALE 10 : 1

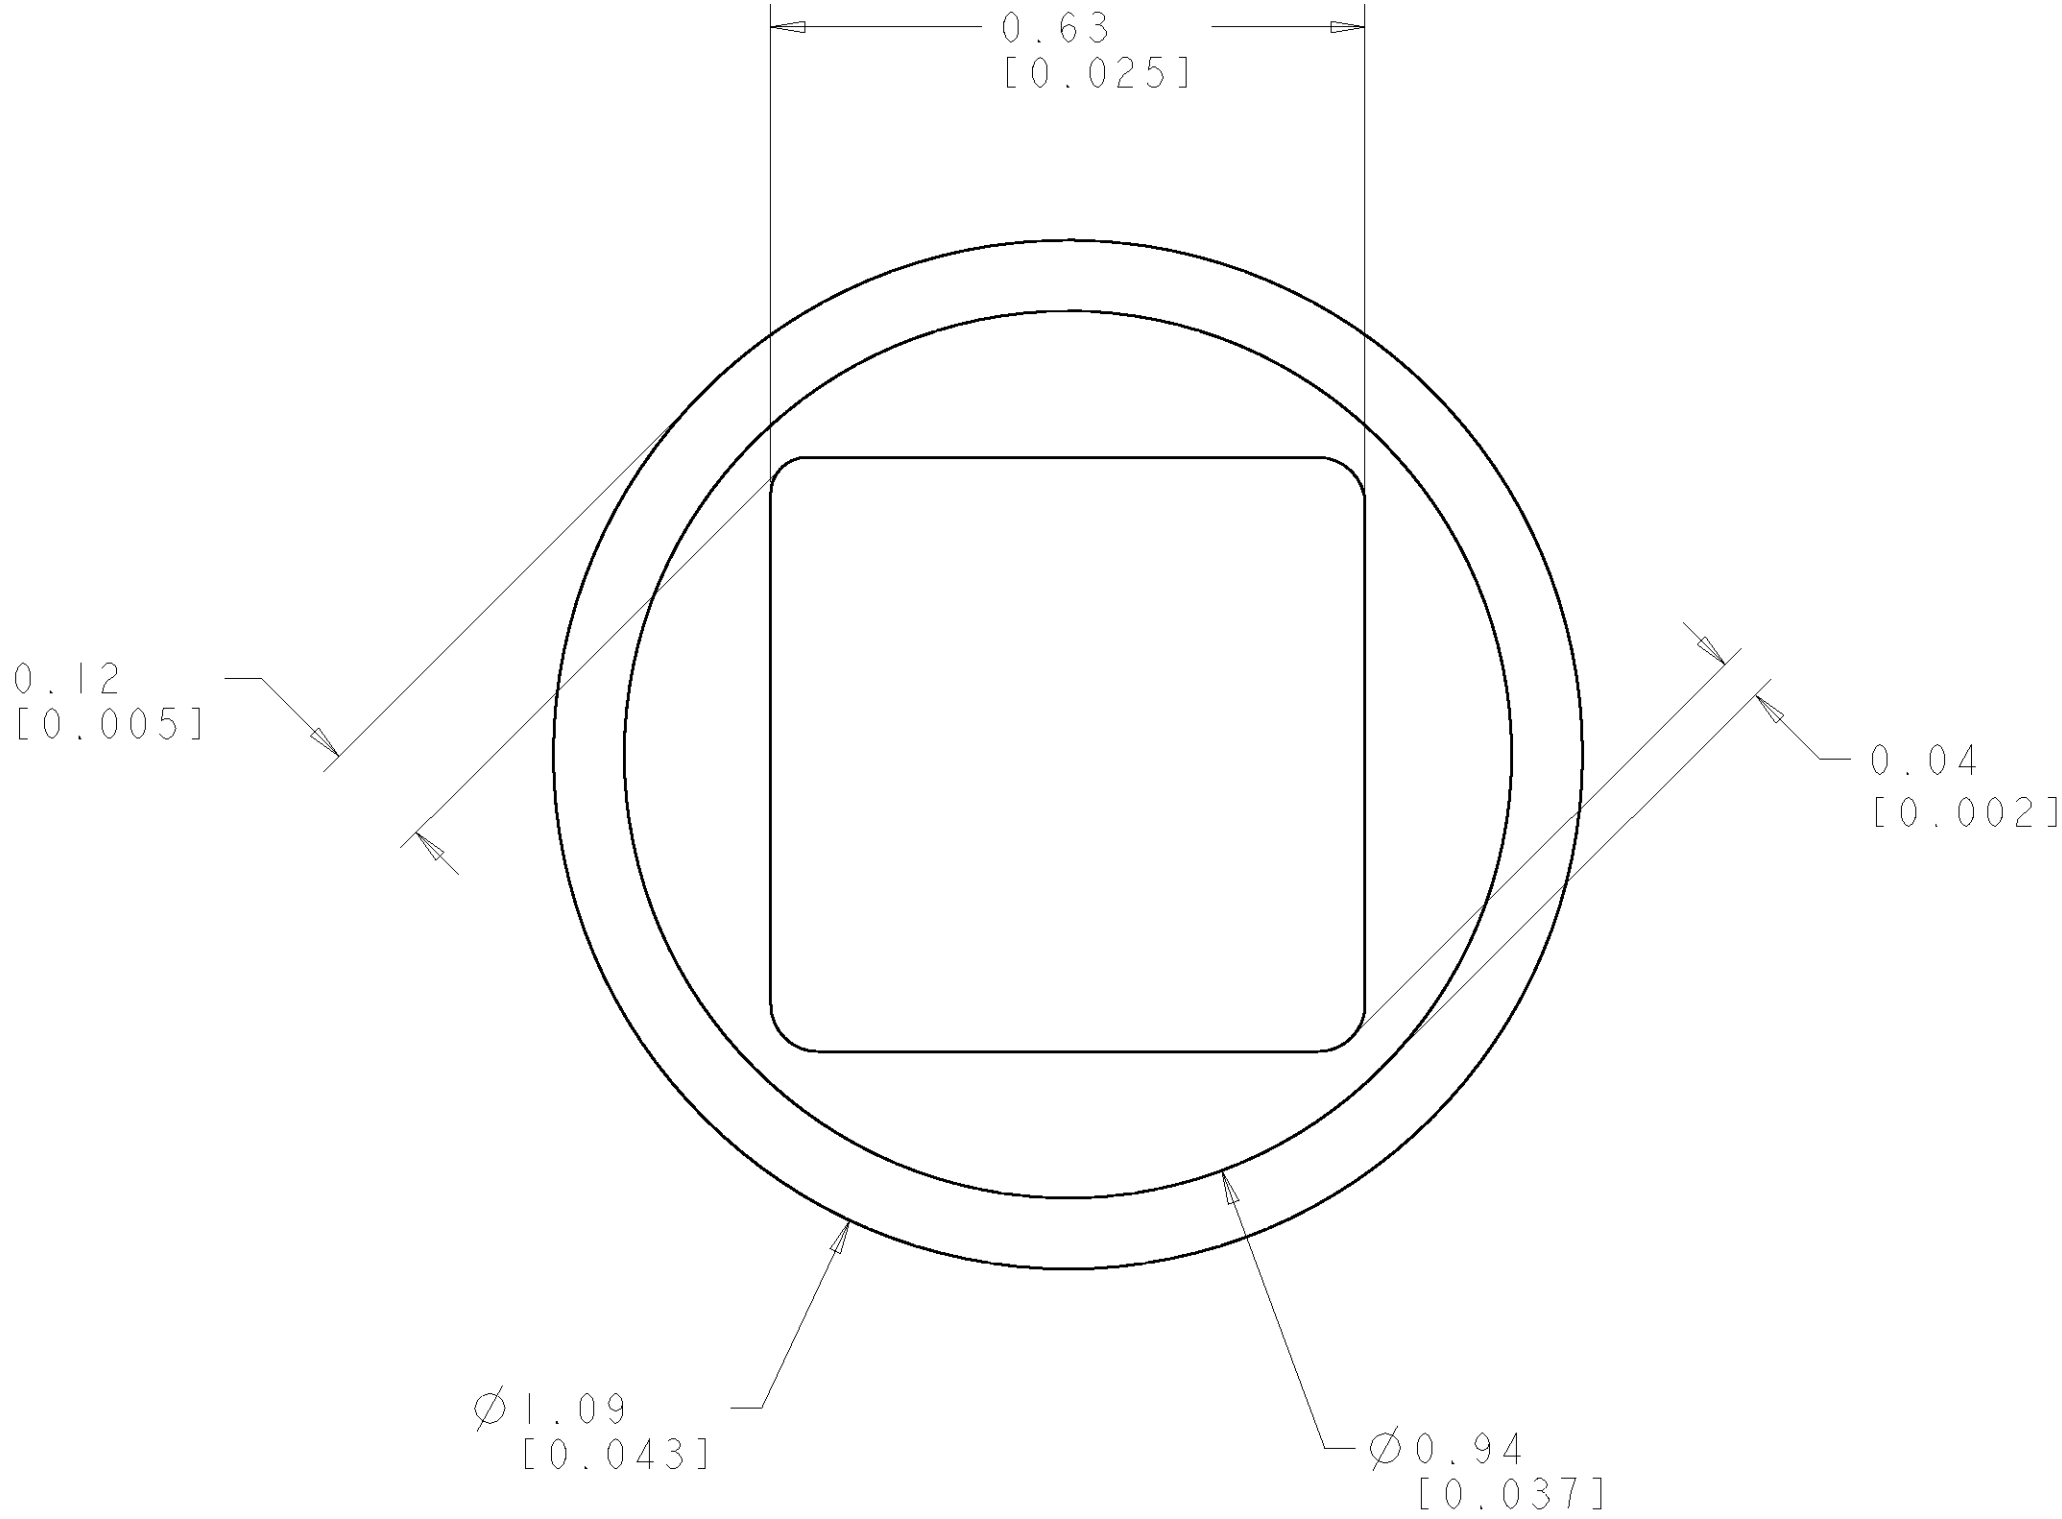

SOLDER TERMNIATION AREA
SCALE 40:1
RECOMMENDED PRINTED CIRCUIT HOLE
FINISHED HOLE: Ø1.02 [0.040]±.08 [0.003]
DRILLED HOLE: Ø1.15 [0.0453] ±.013 [0.0005]
COPPER PLATE: .025 [0.0010] MIN (PER SURFACE)
TIN PLATE: .008 [0.0003] MIN. (PER SURFACE)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1766717-1](#)