






REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	K1	REVISED PER ECO-09-024927	06NOV09	KK	AEG
	K2	REVISED PER ECO-16-003210	18APR16	RP	PS

- 1
- POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE OF BEAMS).


2

3

4

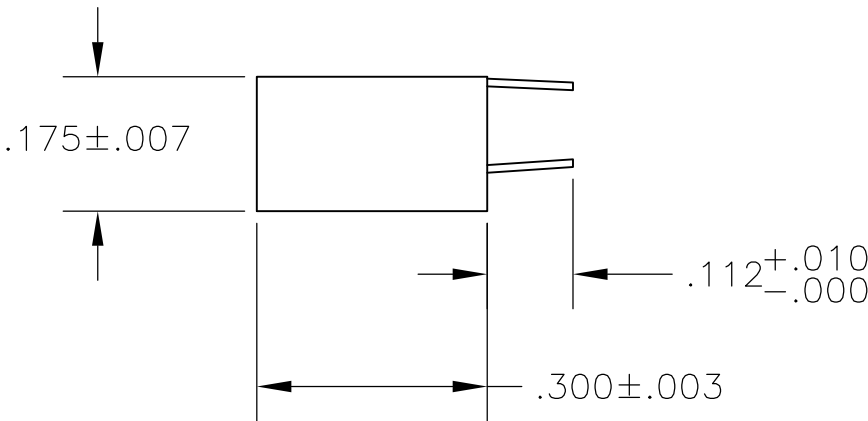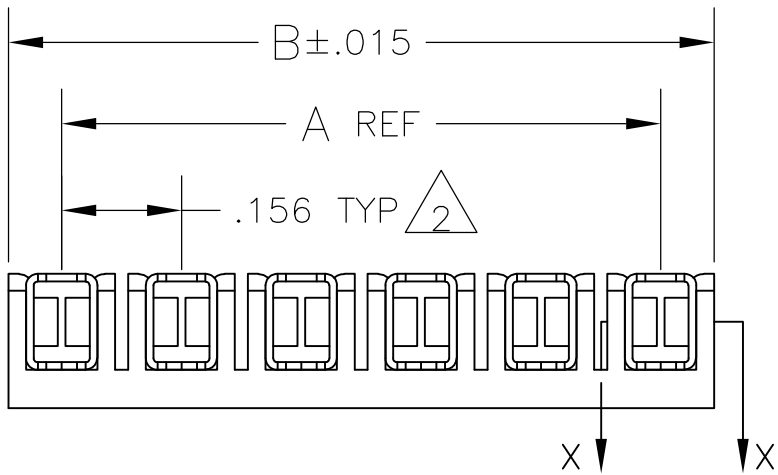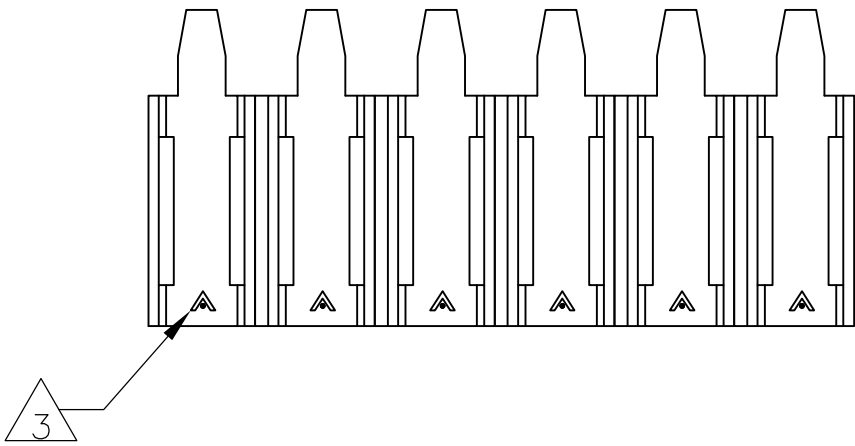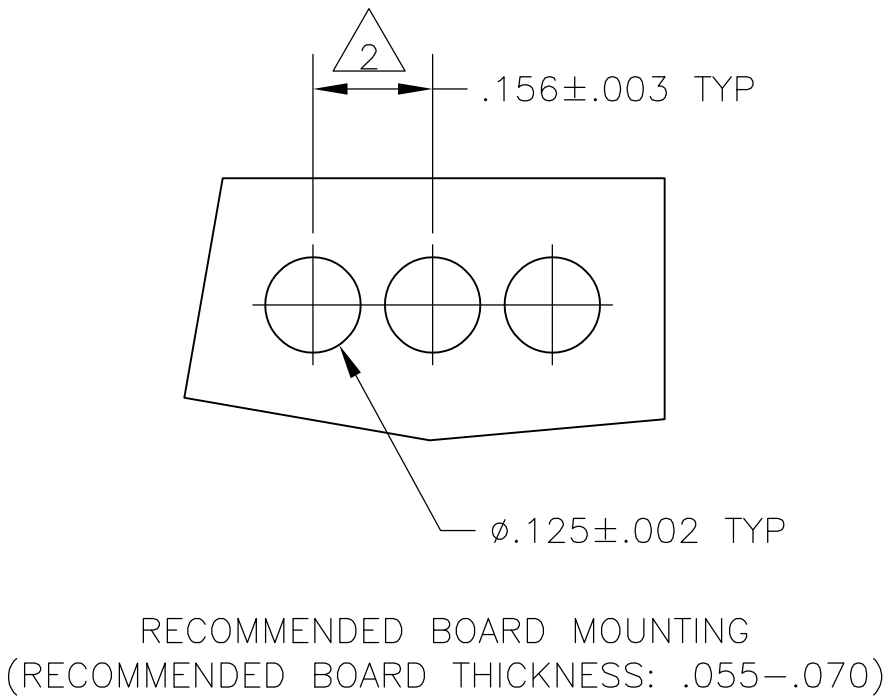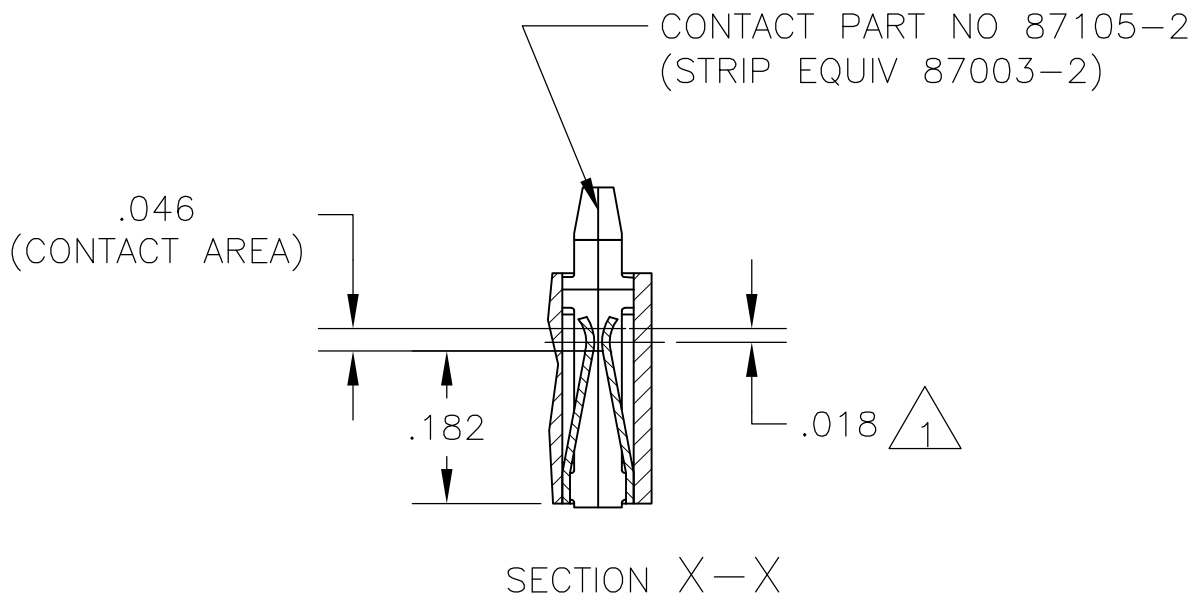

OBSOLETE 4	3.120	2.964	20	2-87985-0
	2.964	2.808	19	1-87985-9
	2.808	2.652	18	1-87985-8
	2.652	2.496	17	1-87985-7
	2.496	2.340	16	1-87985-6
OBSOLETE 4	2.340	2.184	15	1-87985-5
	2.184	2.028	14	1-87985-4
4 OBSOLETE	2.028	1.872	13	1-87985-3
	1.872	1.716	12	1-87985-2
4 OBSOLETE	1.716	1.560	11	1-87985-1
4 OBSOLETE	1.560	1.404	10	1-87985-0
	1.404	1.248	9	87985-9
OBSOLETE 4	1.248	1.092	8	87985-8
	1.092	.936	7	87985-7
	.936	.780	6	87985-6
OBSOLETE 4	.780	.624	5	87985-5
	.624	.468	4	87985-4
	.468	.312	3	87985-3
4	.312	.156	2	87985-2
	B	A	NO OF POSN	ASSEMBLY PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L D RINGLEY 17MAR86		 TE Connectivity	
DIMENSIONS: INCHES		CHK P C DEJONG 18MAR86			
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD P C DEJONG 18MAR86		NAME ASY, MOD I, BRD MNT REC, .156CL , STD PRESSURE, TYPE B
			PRODUCT SPEC 108-25016		
			APPLICATION SPEC 114-25004		
			SIZE A2		
			CAGE CODE 00779		
MATERIAL: HOUSING-FLAME RETARDANT THERMOPLASTIC, COLOR-BLACK		FINISH: CONTACTS: .000079 MIN TIN.		DRAWING NO C-87985	
CONTACTS: PHOS BRONZE		CUSTOMER DRAWING		RESTRICTED TO —	
				SCALE 4:1	
				SHEET 1 of 1	
				REV K2	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-87985-5](#)