
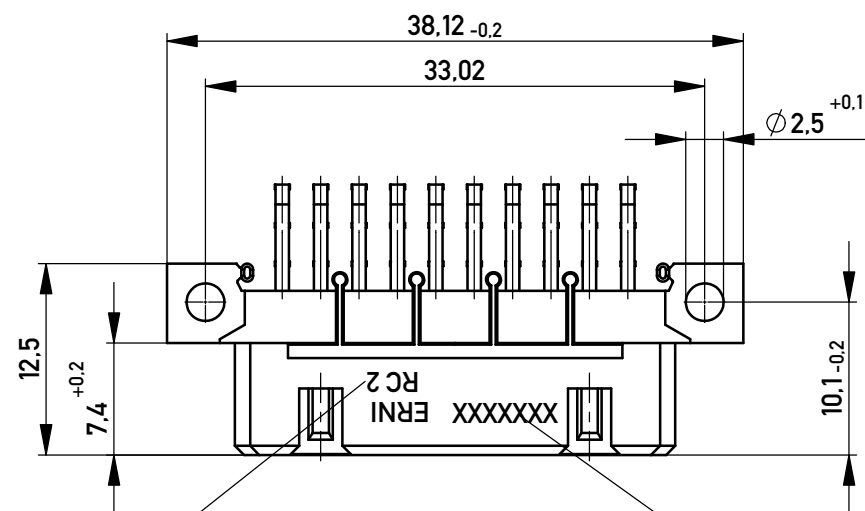


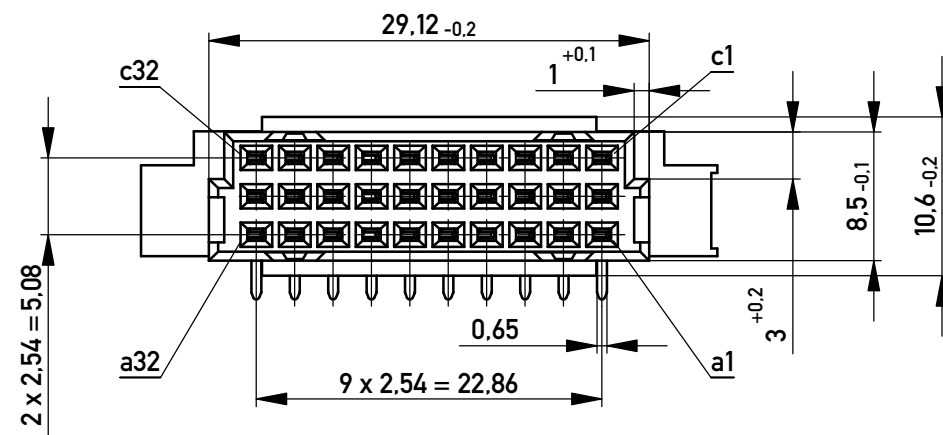


Anforderungsstufe
class



Datum
date

Bestückungsplan / contact layout


■ bestückt / assembled

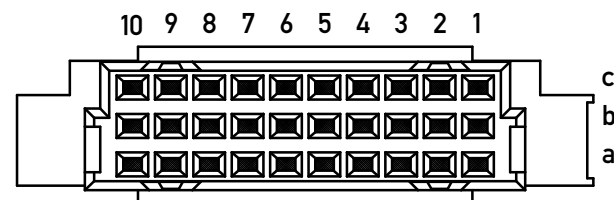

Leiterplatten- Lochbild / PCB drillhole pattern

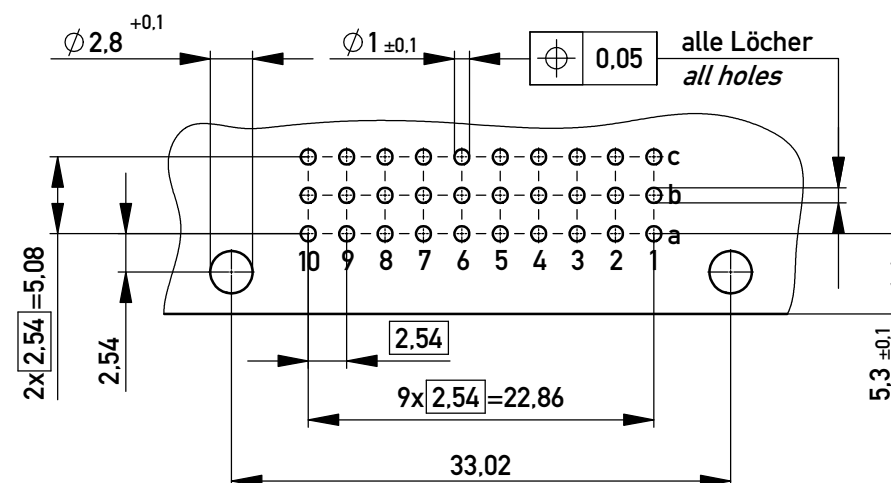

M 1:1

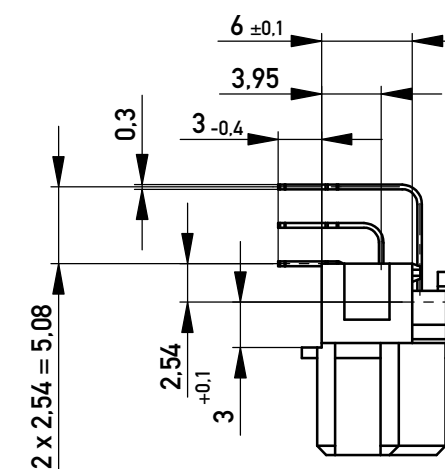

Tauchlötanschluß 0,3x0,65 mm / solder terminal 0,3x0,65 mm

Isolierwerkstoff / housing material: PBT GF30

Bauart 7 / type 7

Anforderungsstufe 2 = 400 Steckzyklen / performance class 2 = 400 mating cycles

Fehlende Maße und Angaben nach IEC 60 603-2 / DIN EN 60 603-2

Missing information and dimensions per IEC 60 603-2

Copyright by ERNI Production GmbH & Co. KG
Proprietary notice pursuant to ISO 16016 to be observed.

Information:			Tolerances		Scale	2:1
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.			Subject to modification without prior notice. Drawing will not be updated.		Designation	
					Federleiste R/3 30 Löt Fem. Connector R/3 30 Solder	
a					www.ERNI.com	
Index		01.03.2017	Date		254326	
					Class	STVR/3
					I A3	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERNI Electronics:](#)

[254326](#)