




REV.	DATE	ECR NO.	DESCRIPTION
NC	06/16/09	XXXXXX	INITIAL RELEASE

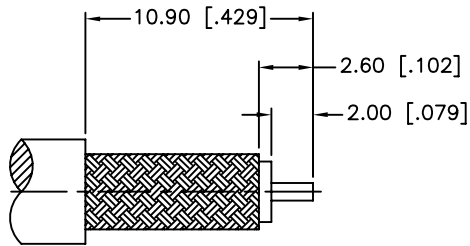

RECOMMENDED
CABLE STRIPPING DIM'S

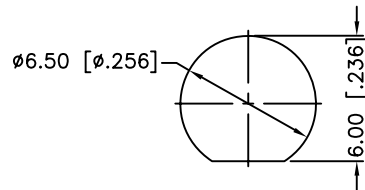

RECOMMENDED
MOUNTING HOLE

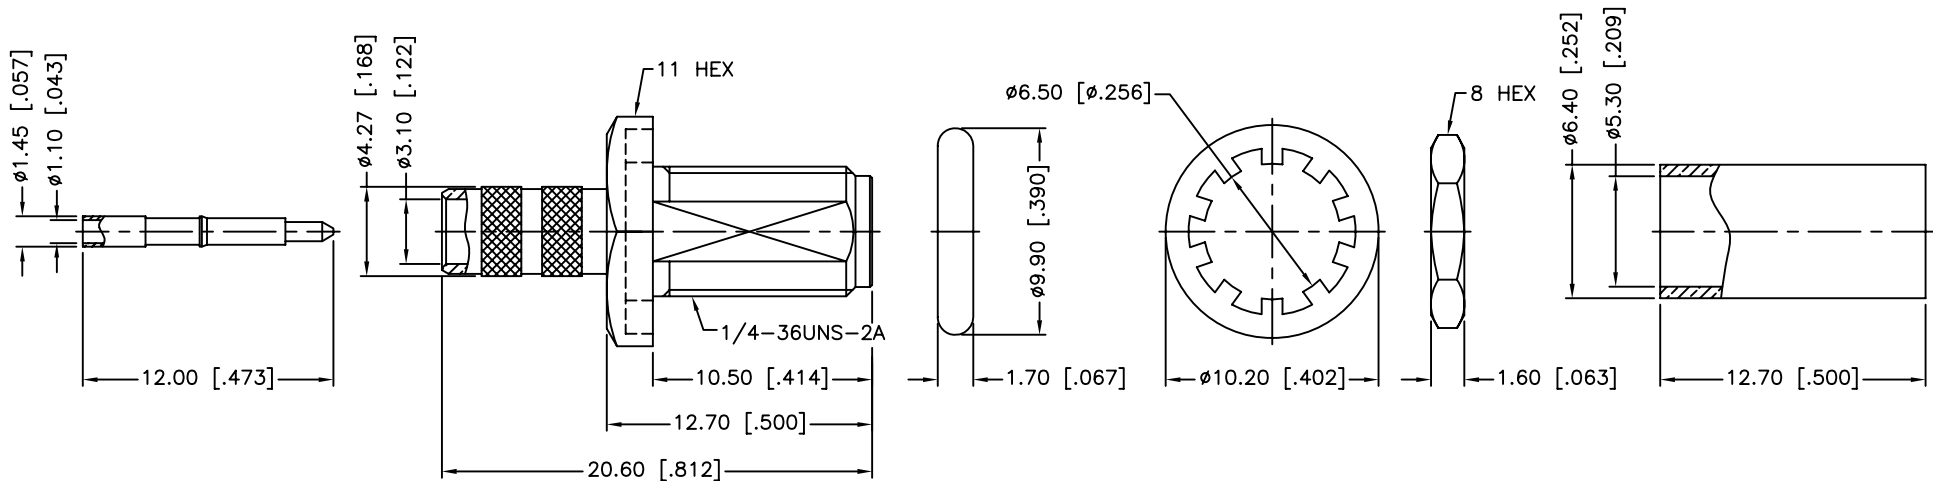

1. CRIMPED FERRULE
HEX CRIMP SIZE .213"
2. CONTACT PIN TO SOLDER
3. MAX. PANEL THICKNESS=2.4mm

8	FERRULE	BRASS	GOLD	1	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex						
7	CONTACT PIN	BRASS	GOLD	1		DRAWN	M.ZHANG							06/16/09
6	HEX NUT	BRASS	GOLD	1		CHECKED			PART DESCRIPTION SMA BULKHEAD CRIMP JACK (FOR RG-58C/U, 58/U)					
5	LOCK WASHER	BRASS	GOLD	1		ISSUED								
4	GASKET	SILICONE	RED	1		SHEET	1 OF 1							
3	RING	BRASS	GOLD	1					PART NO. 132280RP					
2	INSULATOR	PTFE	NATURAL	1										
1	BODY	BRASS	GOLD	1					DWG. NO. 132280RP.DWG					
	DESCRIPTION	MATERIAL	FINISH	QTY	C:/CONNEX/132280RP.DWG			REV.						

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[132280RP](#)