



**Mallory Sonalert Products, Inc.**

Part #: **MSE14MSN3**

## Sales Outline Drawing


Revision: **A**

### Specifications:

|                       |                                               |
|-----------------------|-----------------------------------------------|
| Sound Level Category  | Medium                                        |
| Mode of Operation     | Siren Sweep 2.1 - 5.9 kHz @ 7 Sweeps per Sec. |
| Voltage Rating        | 7 to 14 VDC                                   |
| Frequency             | 2100-5900 Hz Typical                          |
| Loudness @ 1 FT       | 75 to 85 dB(A) Typ.                           |
| Current Draw          | 50mA MAX                                      |
| Housing Material      | Valox (UL94V-0), Color: Black                 |
| Storage Temperature   | -40° to +80° C                                |
| Operating Temperature | -40° to +65° C                                |
| Weight (Typical)      | 4.0g                                          |
| Options               | Please contact factory.                       |

### Dimensions: Inches (mm)

**ROHS Compliant**

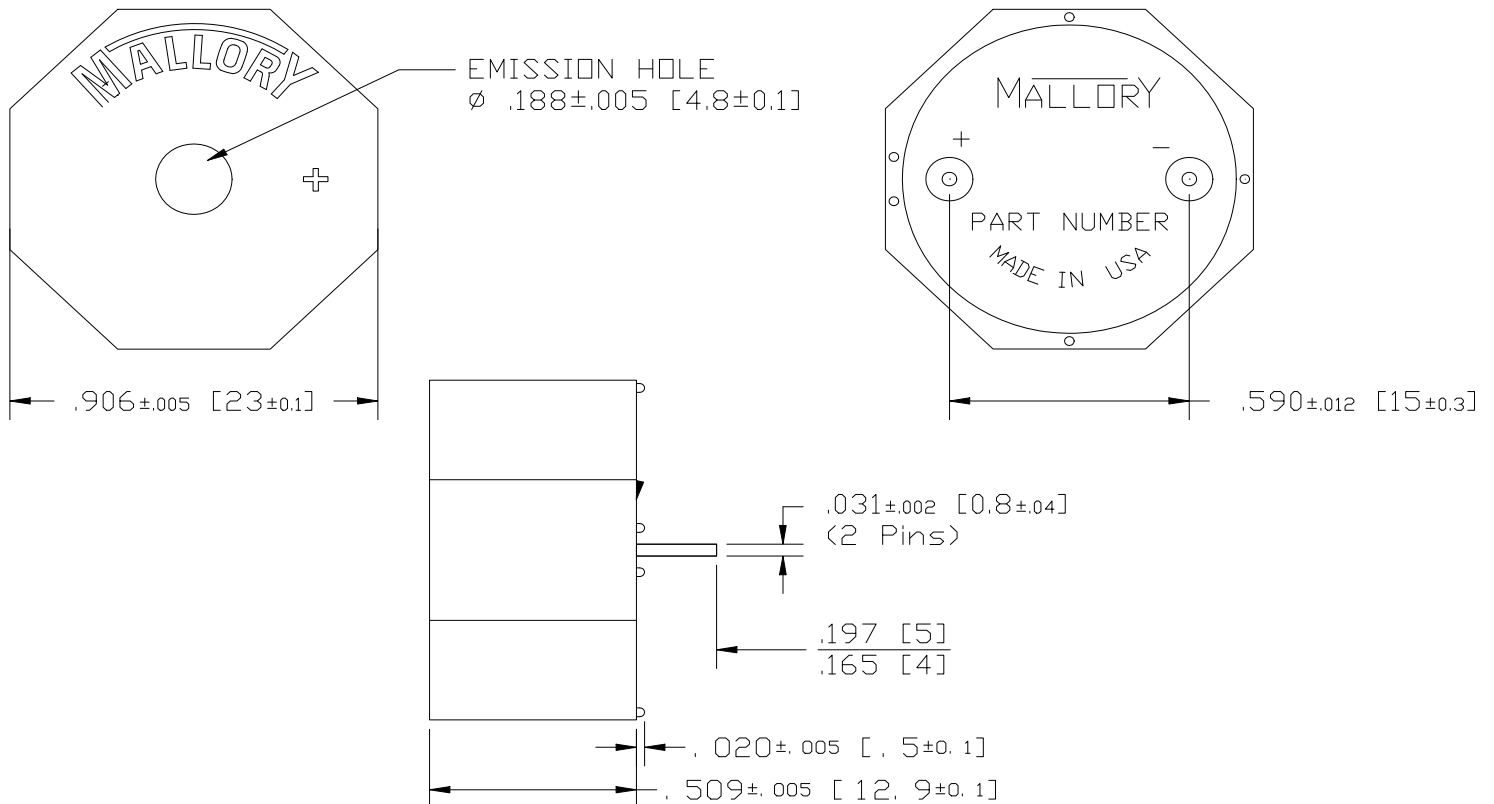

NOTE A:  
TERMINALS - .031" DIA. NICKEL/TIN COATED BRASS.

NOTE B:  
MOUNTING- INSERT INTO PRINTED CIRCUIT BOARD AND HAND OR MACHINE SOLDER.  
UNITS ARE SUITABLE FOR WAVE SOLDERING. RECOMMENDED MAXIMUM TEMPERATURE  
AND TIME DURATION FOR WAVE SOLDERING IS +270°C AND 3 SECONDS RESPECTIVELY.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mallory Sonalert:](#)

[MSE14MSN3](#)