


Feature -

DPST
two buttons in line
vertical PCB mount
LED illuminated available

Applications -


office equipments
measuring instruments
audio, TV, VCRs
many types of electronic equipments

SPECIFICATIONS

SWITCH SPECIFICATIONS	
POLE - POSITION	DPST
CONTACT RATING	12 V DC , 50 mA
CONTACT RESISTANCE	100 mΩ MAX. 5 V DC ; 1 A , by Method of Voltage DROP
INSULATION RESISTANCE	100 MΩ MIN. 100 V DC for 1 minute
DIELECTRIC STRENGTH	Breakdown is not Allowable ; 100 V AC for 1 Minute
OPERATING FORCE	160 ± 50 gf
OPERATING LIFE	500,000 cycles
OPERATING TEMPERATURE RANGE	-20°C ~ 70°C
TOTAL TRAVEL	0.25 ± 0.10 mm


LED SPECIFICATIONS		Value / LED Color			
	Unit				
		Blue	Green	Red	Yellow
FORWARD CURRENT	If	20	20	20	20
REVERSE VOLTAGE	Vr	5.0	5.0	5.0	5.0
REVERSE CURRENT	Ir	10	10	10	10
FORWARD VOLTAGE@20mA	Vf	3.3-4.0	2.1-2.5	2.0-2.5	2.0-2.5
LUMINOUS INTENSITY@20mA	Iv	1300	700	900	700

Physical and electrical information of LED will be provided upon customer's request on switches .

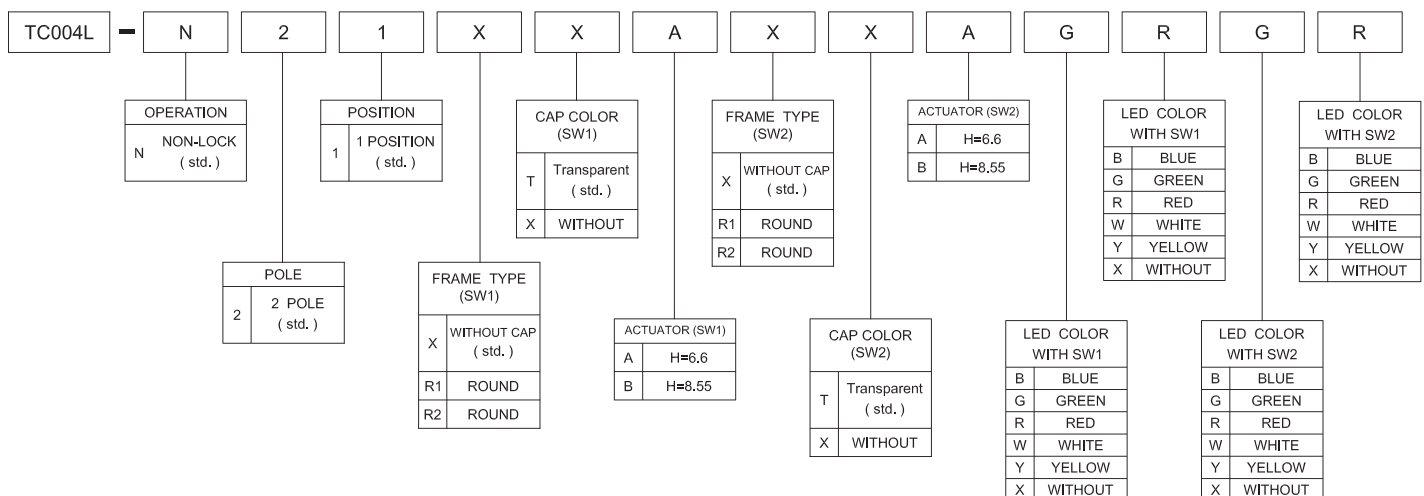
HOW TO ORDER


▶ FRAME TYPE OPTION


TC004L-N21R1TAR1TA□□□□

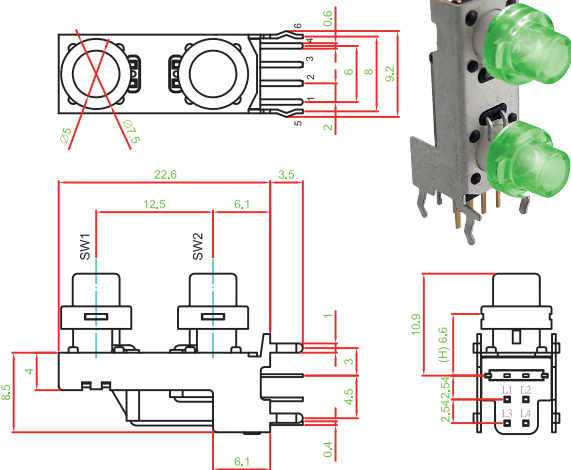


TC004L-N21R2TAR2TA□□□□

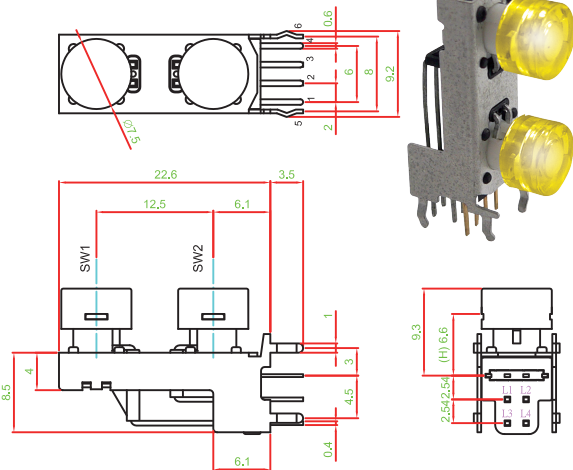


TC004L-N21XXBXBXB□□□□

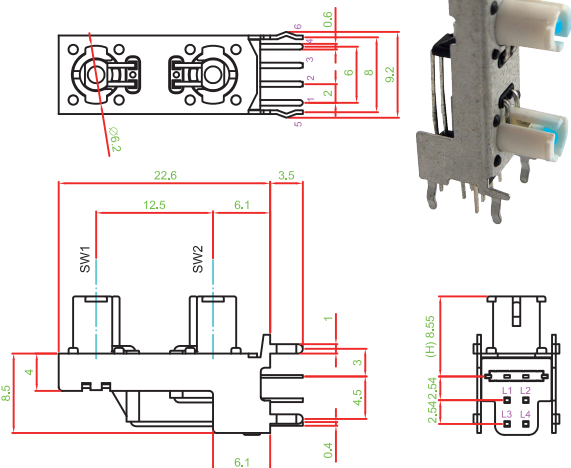

▶ P.C.B LAYOUT



▶ CIRCUIT

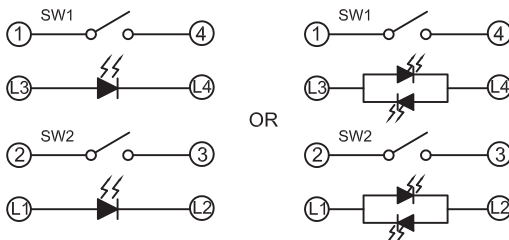

▶ MATERIAL

- ACTUATOR : PA66
- TERMINAL : BRASS SILVER PLATING
- FRAME : STEEL PLATE
- SPRING PLATE : STAINLESS STEEL
- BASE FRAME : PA66

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Well Buying:

[TC004L-N21R2TAR2TAGXGX](#)