

April 2015

Multilayer Balun


For 2400–2500MHz

HHM1917A5

1.0x0.5mm [EIA 0402]*


* Dimensions Code JIS[EIA]

SHAPES AND DIMENSIONS

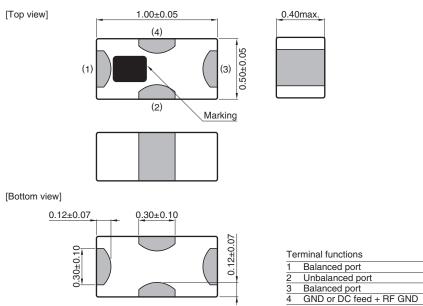

Dimensions in mm

RECOMMENDED LAND PATTERN



O RoHS Directive Compliant Product: See the following for more details related to RoHS Directive compliant products. http://product.tdk.com/en/environment/rohs/

Conformity to RoHS Directive

公TDK

[•] All specifications are subject to change without notice.

[•] Before using these products, be sure to request the delivery specifications.

HHM1917A5

ELECTRICAL CHARACTERISTICS

Item	Frequency Range (MHz)	Min.	Тур.	Max.
Unbalanced Port Characteristic Impedance (Ω)			50 (Nominal)	
Balanced Port Characteristic Impedance (Ω)			50 (Nominal)	
Return Loss at Unbalanced Port (dB)	2400 to 2500	10	—	_
Phase Balance (deg.)	2400 to 2500	165	_	195
Amplitude Balance (dB)	2400 to 2500	-1.2	—	1.2
Insertion Loss (dB)	2400 to 2500	_	—	0.7


TEMPERATURE RANGE

Operating temperature	Storage temperature
(° C)	(°C)
-40 to +85	-40 to +85


```
All specifications are subject to change without notice.Before using these products, be sure to request the delivery specifications.
```

HHM1917A5


FREQUENCY CHARACTERISTICS



RETURN LOSS




AMPLITUDE BALANCE 3 2 Amplitude Balance(dB) 1 0 -1 -2 _3 └── 1000 1500 3500 4000 2000 2500 3000 Frequency(MHz)

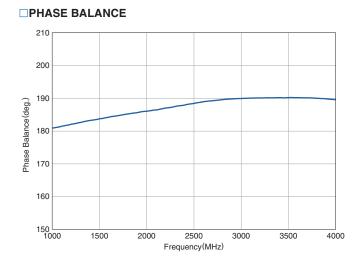

• All specifications are subject to change without notice.

• Before using these products, be sure to request the delivery specifications.

RECOMMENDED REFLOW PROFILE

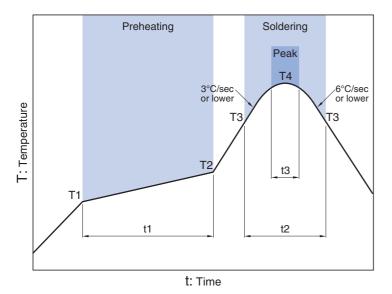

Soldering Preheating Critical zone (T3 to T4) Peak Temp. Time Temp. Time Temp. Time T1 T2 **T**4 t1 ТЗ t2 t3* 150°C 200°C 60 to 120sec 217°C 60 to 120sec 240 to 260°C 30sec max.

*t3 : Time within 5°C of actual peak temperature

The maximum number of reflow is 3.

All specifications are subject to change without notice.Before using these products, be sure to request the delivery specifications.

REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using these products.

▲ REMINDERS

The products listed on this catalog are intended for use in general electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition.

The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property.

Please understand that we are not responsible for any damage or liability caused by use of the products in any of the applications below or for any other use exceeding the range or conditions set forth in this catalog.

- (1) Aerospace/Aviation equipment
- (2) Transportation equipment (cars, electric trains, ships, etc.)
- (3) Medical equipment
- (4) Power-generation control equipment
- (5) Atomic energy-related equipment
- (6) Seabed equipment
- (7) Transportation control equipment

- (8) Public information-processing equipment
- (9) Military equipment
- (10) Electric heating apparatus, burning equipment
- (11) Disaster prevention/crime prevention equipment
- (12) Safety equipment
- (13) Other applications that are not considered general-purpose applications

When using this product in general-purpose applications, you are kindly requested to take into consideration securing protection circuit/ equipment or providing backup circuits, etc., to ensure higher safety.

• All specifications are subject to change without notice.

[•] Before using these products, be sure to request the delivery specifications.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TDK: <u>HHM1917A5</u>