

FFKDSA1/H-2,54-29 - 1810874

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




PCB terminal block, Nominal current: 6 A, Nom. voltage: 160 V, Pitch: 2.54 mm, Number of positions: 29, Connection method: Push-in spring connection, Mounting: Wave soldering, Conductor/PCB connection direction: 0°, Color: green

The figure shows a 10-position version

Product Features

- PCB terminal blocks with front spring-cage connection
- Two solder pins for a high level of stability on the PCB
- Push-in direct plug-in technology for solid or stranded conductors with ferrules
- When connecting stranded conductors without ferrules, the terminal point is opened using an orange opening lever

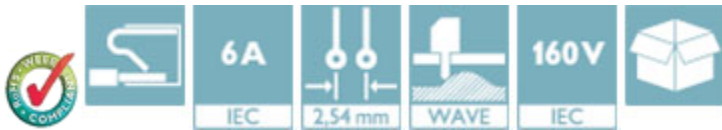

Key Commercial Data

Packing unit	1 pc
Weight per Piece (excluding packing)	16.0 g
Custom tariff number	85369010
Country of origin	Germany

Technical data

Product type	Printed circuit board terminal
Approval	CSA
	UL Recognized
	cUL Recognized
	EAC
	cULus Recognized
Rated voltage (IEC)	160
Rated current (IEC)	6
Mounting type	Wave soldering

FFKDSA1/H-2,54-29 - 1810874

Technical data

Number of positions	29
Pitch	2.54 mm
Levels	single-level
Connection method	Push-in spring connection
Connection cross section	0.5
Conductor connection direction	0 °
Product family	FFKDS(A)/H

Classifications

eCl@ss

eCl@ss 4.0	27141109
eCl@ss 4.1	27141109
eCl@ss 5.0	27141190
eCl@ss 5.1	27141190
eCl@ss 6.0	27261101
eCl@ss 7.0	27440401
eCl@ss 8.0	27440401
eCl@ss 9.0	27440401

ETIM

ETIM 3.0	EC001121
ETIM 4.0	EC002643
ETIM 5.0	EC002643

UNSPSC

UNSPSC 6.01	30211801
UNSPSC 7.0901	39121432
UNSPSC 11	39121432
UNSPSC 12.01	39121432
UNSPSC 13.2	39121432

Approvals

Approvals

Approvals

CSA / UL Recognized / cUL Recognized / EAC / cULus Recognized

FFKDSA1/H-2,54-29 - 1810874

Approvals

Ex Approvals

Approvals submitted

Approval details

CSA	
	B
mm ² /AWG/kcmil	20
Nominal current I _N	6 A
Nominal voltage U _N	150 V

UL Recognized	
	B
mm ² /AWG/kcmil	26-20
Nominal current I _N	6 A
Nominal voltage U _N	150 V

cUL Recognized	
	B
mm ² /AWG/kcmil	26-20
Nominal current I _N	6 A
Nominal voltage U _N	150 V

EAC

cULus Recognized

FFKDSA1/H-2,54-29 - 1810874

Accessories

Accessories

Labeled terminal marker


Marker card - SK 2,54/2,8:FORTL.ZAHLEN - 0804853




Marker card, Card, white, labeled, Horizontal: Consecutive numbers 1 - 10, 11 - 20, etc. up to 91 - 99, Mounting type: Adhesive, for terminal block width: 2.54 mm, Lettering field: 2.54 x 2.8 mm

Drawings

Drilling diagram



Dimensional drawing

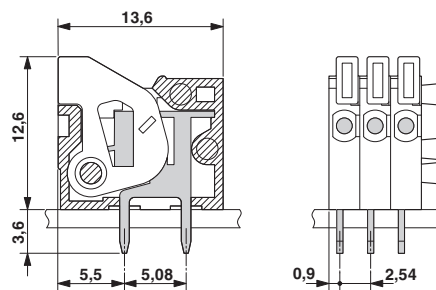

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[1810874](#)