
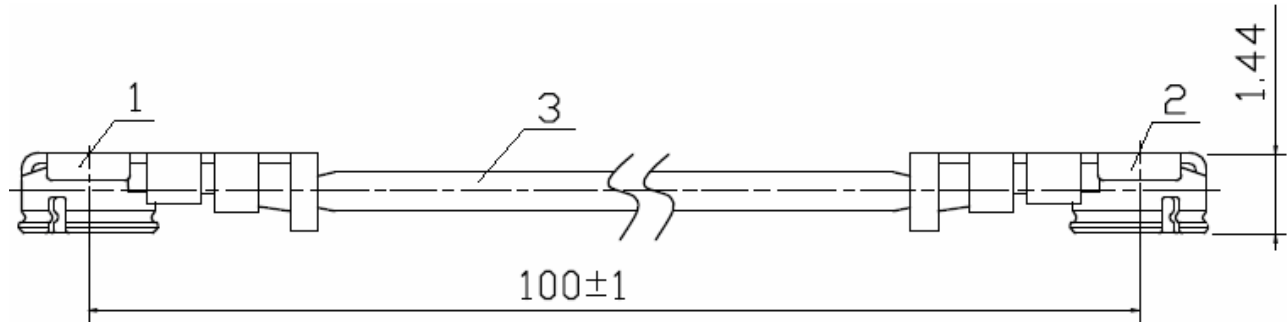


PLUG-PLUG MML H2.0**R302.205.000****CABLE 1.13/50 S-BR, LENGTH 10CM**Series : **MML**

All dimensions are in mm.



- * 1 * Connector A : **MML PLUG(gold plated) H2.0**
 * 2 * Connector B : **MML PLUG(gold plated) H2.0**
 * 3 * Cable : **1.13/50 S BLACK**

ELECTRICAL CHARACTERISTICS

Impedance	50 Ω
Frequency	0-3 GHz
Operating temperature	-40/+90 ° C
VSWR	1.5 + 0,000 x F(GHz) Maxi
Insertion loss	0.12 √F(GHz) dB Maxi
Voltage rating	200 Veff Maxi
Dielectric withstanding	200 Veff mini
Insulation resistance	500 MΩ mini

SPECIFICATION

Weight	0,4000 g
Cable retention	12.74 N mini
Mating life	30 Cycles
Others :	

RADIAL 
Edition : 1020 A

Design changes may be in order to improve the product.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Radial:

R302205000