


SC-32S

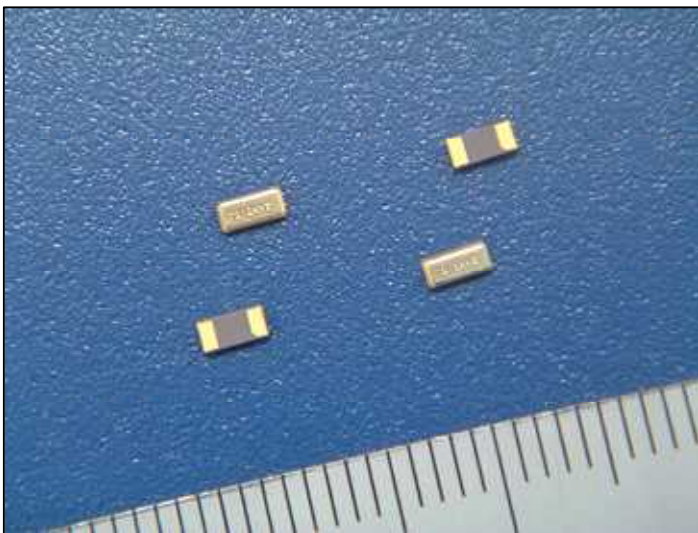

Features

- Ultra thin type (0.75mm)
- Suitable for high density surface mounting
- Excellent shock and heat resistance
- Complete Pb-free
- A crystal resonator processed by high reliable photolithographic technology inside.

Applications


Cellular Phones, PHS, PDA, DSC, Car Audio
GPS Module, FM Tuner Module, Mobile Device
Sub-clock function for a variety of Micro-
Controllers

Standard Specifications


Conditions where not specified (Temperature: 25±2 , DL:0.1μW)

Item	Symbol	Specifications	Conditions Note
Nominal Frequency	f_nom	32.768kHz	
Frequency Tolerance	f_tol	±20×10 ⁻⁶	
Turnover Temperature	Ti	+25±5	
Parabolic Coefficient	B	(-3.0±1.0)×10 ⁻⁸ / °C ²	
Load Capacitance	CL	7pF, 9pF, 12.5pF	
Motional Resistance (ESR)	R1	70kΩ Max.	
Absolute Max. Drive Level	DLmax.	0.5μW Max.	
Drive Level	DL	0.1μW typ.	
Shunt Capacitance	C0	1.0pF typ.	
Frequency Ageing	f_age	±3×10 ⁻⁶ /Year	+25±3 , First Year
Operating Temperature	T_use	-40 ~ +85	
Storage Temperature	T_stg	-55 ~ +125	Piece part basis


Dimensions

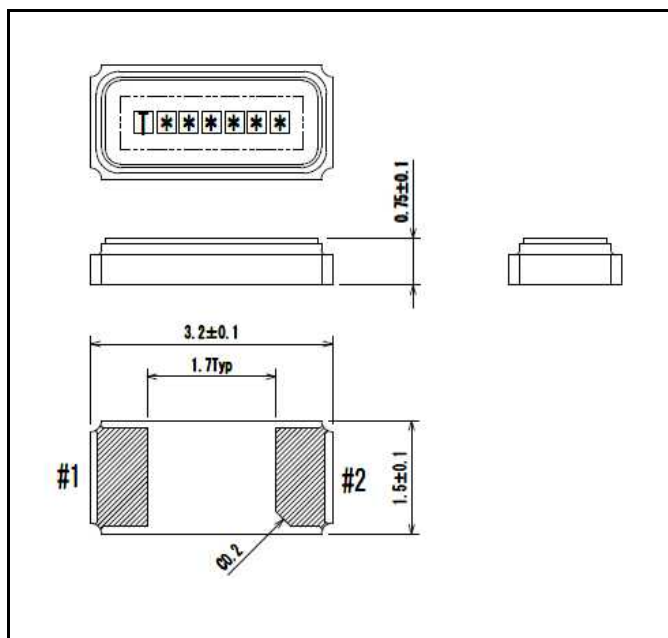

Internal Lead Connections

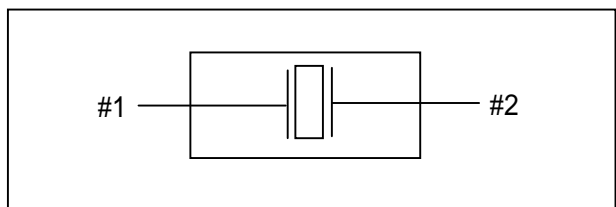

Recommended Soldering

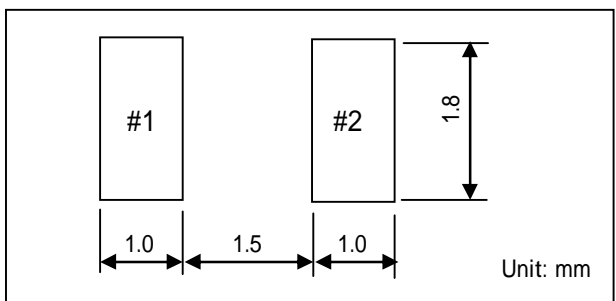

Remark: Please make sure that there is no pattern under SC-32S on the circuit board.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Seiko Instruments:](#)

[SC32S-12.5PF20PPM](#) [SC32S-7PF20PPM](#)