


Number of contacts


78+2, 60+4, 42+6, 24+8, 6+10

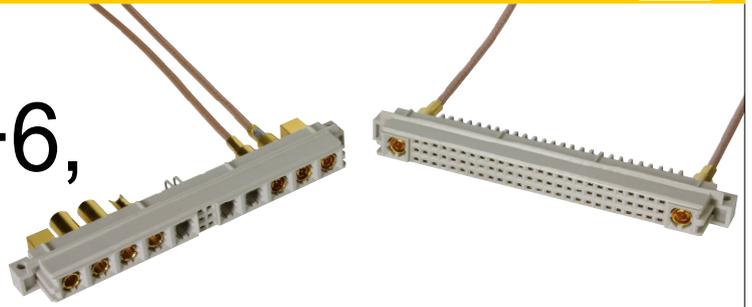

Female connectors

Identification	No. of contacts	Contact arrangement	Part number 3	Performance levels according to IEC 60 603-2. Explanation chapter 00 2	1
Female connector with angled solder pins (without special contacts)*	78 + 2		Performance level 3 on request	09 73 278 6801	Performance level 1 on request
	60 + 4			09 73 260 6801	
	42 + 6			09 73 242 6801	
	24 + 8			09 73 224 6801	
	6 + 10			09 73 206 6801	


Dimensions

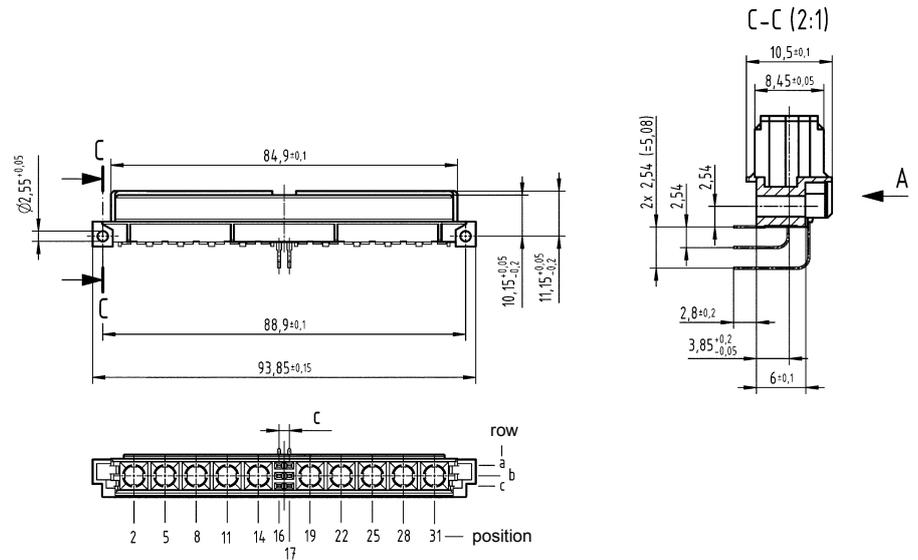

Order high current, high voltage, coaxial and fibre optic contacts separately

Board drillings

Mounting side

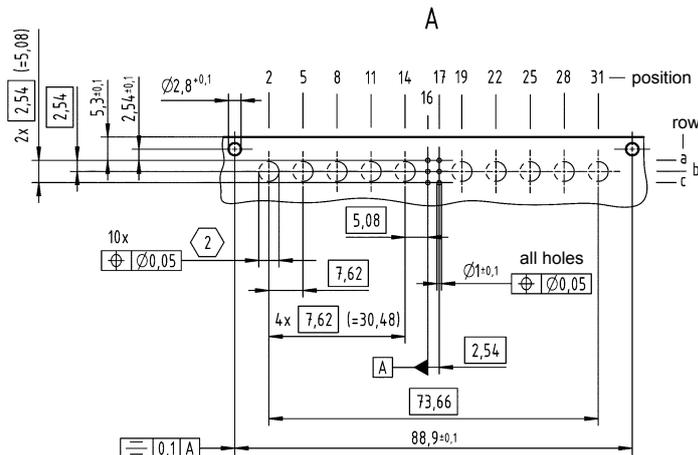

Type	c
78 + 2	25 x 2,54 = 63,5
60 + 4	19 x 2,54 = 48,26
42 + 6	13 x 2,54 = 33,02
24 + 8	7 x 2,54 = 17,78
6 + 10	1 x 2,54 = 2,54

Dimensions in mm

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[HARTING:](#)

[09793966903](#) [09791966903](#)