THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT - By - ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	ECR-16-008648	16JUN2016	WZ	GG

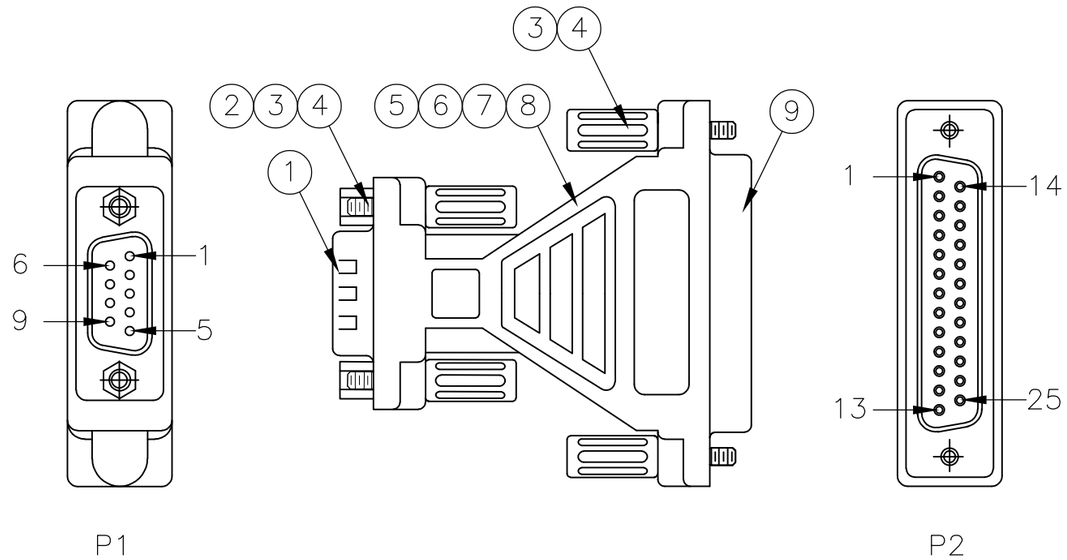

NOTES:

1. PACKAGED IN PRINTED ZIPLOCK POLYBAG.
2. LABEL ON POLYBAG TO READ AS FOLLOWS:

   621783-1
   AT ADAPTER (DB9M/DB25F)

3. WRAP FOIL OVER PRE-MOLD 360° FROM CONNECTOR SHELL TO SHELL.
4. IF USING ALUMINUM MYLAR FOIL, ALUMINUM MUST BE FACING INWARD.
5. THIS PRODUCT IS PRODUCED IN COMPLIANCE WITH ANSI/ASQC Z1.4-1993, TO AN INSPECTION LEVEL III, WITH A NORMAL SAMPLING PLAN.
6. TEST REQUIREMENT:
   CONTINUITY RESISTANCE: 1 ohm MAX,
   INSULATION RESISTANCE: 50 M ohm MIN.
   HI-POT TEST: DC 300V/0.01 Sec MIN.
7. PRODUCT AND PROCESSING MUST MEET REQUIRENTS OF TYCO ENVIRONMENTAL STANDARD 230-702.

TE P/N: 621783-1

P1	P2
1	8
2	3
3	2
4	20
5	7
6	6
7	4
8	5
9	22
SHELL	1+SHELL

QTY	U/M	DESCRIPTION	ITEM
1	PC	DB25 FEMALE, SOLDER TYPE, CONTACT: GOLD FLASH, SHELL: NICKEL PLATED, INSULATION COLOR: BLACK.	9
AR	MR	UL1007 28AWG, COLOR: BLACK.	8
AR	MR	ALUMINUM FOIL, W: 35.0MM.	7
AR	KG	INNER MOLD PE.	6
AR	KG	MOLD PVC, 40P, COLOR: BEIGE(BG01).	5
AR	KG	MOLD PVC, 30P, COLOR: BEIGE(BG01).	4
4	PC	#4-40 THUMBSCREW.	3
2	PC	#4-40 HEX NUT, 5.0*6.0MM.	2
1	PC	DB9 MALE, SOLDER TYPE, CONTACT: GOLD FLASH, SHELL: INSULATION COLOR: BLACK.	1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -

MATERIAL -

FINISH -

DWN D.EISENTRAUL 12-16-96
CHK R.CAPP 12-20-96
APVD D.WILSON 12-20-96
PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT 0.000000

TE Connectivity

NAME
ADAPTER, DB9 MALE TO
DB25 FEMALE, OVERMOLDED
—

SIZE A3 | CAGE CODE 00779 | DRAWING NO C-621783 | RESTRICTED TO —

CUSTOMER DRAWING | SCALE N.T.S | SHEET 1 OF 1 | REV B

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:

621783-1