


LOC	DIST	REVISIONS					
AJ	17	P	LTR	DESCRIPTION	DATE	DWN	APVD
			B	REVISED PER EC OS14-0098-05	11MAY2006	KS	KW

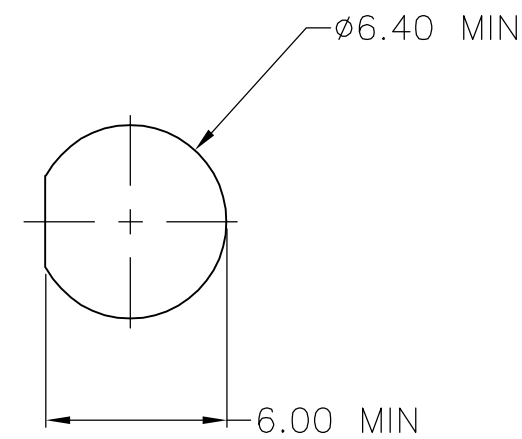

RECOMENDED
MOUNTING HOLE

<u>ELECTRICAL</u>	
FREQUENCY	DC – 6 GHz
NOMINAL IMPEDANCE	50 OHMS
VOLTAGE RATING	250 VOLTS (VRMS MAX) @ SEA LEVEL
VSWR (MATED CONNECTORS ONLY)	1.20:1 MAX @ 2 GHz 1.40:1 MAX @ 6 GHz
INSULATION RESISTANCE	1,000 MEGOHMS MIN @ 250 VDC
DIELECTRIC WITHSTANDING VOLTAGE	500 VOLTS (VRMS MIN) @ SEA LEVEL
<u>MECHANICAL</u>	
CONNECTOR DURABILITY	100 MATING CYCLES
<u>ENVIRONMENTAL</u>	
TEMPERATURE RATING	–40°C(–40°F) TO +125°C(257°F)

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DK SCHRUM CHK KE WEIDNER		11MAY2006 11MAY2006		Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD KE WEIDNER 11MAY2006		NAME	
		0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC —		SSMT RIGHT ANGLE JACK TO SMA BULKHEAD JACK INTERSERIES CABLE ASSEMBLY	
MATERIAL —		FINISH —		APPLICATION SPEC —			
				WEIGHT —		SIZE A2	
						CAGE CODE 00779	
						DRAWING NO C-1064553	
						RESTRICTED TO —	
				CUSTOMER DRAWING		SCALE 4:1 SHEET 1 OF 1 REV B	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[9960-4200-02](#)