

RJ45 10/100/1000 Base-T Jack with Magnetic Module

ARJ11C

RoHS
Compliant



FEATURES:

- Excellent EMI suppression
- Meet IEEE 802.3 standards and FCC mechanical requirements
- Low Cost, RoHS Compliant Reflow-able device

APPLICATIONS:

- LAN-on-Motherboard (LOM)
- SOHO (ADSL modems), Hubs.
- Suitable for CAT 5 & 6 Fast Ethernet Cable or better UTP

STANDARD SPECIFICATIONS at 25°C

Operating Temperature: - 0°C to + 70°C
Storage Temperature: - 40°C to +85°C

Operating life: 750 Cycles min.

Part Number	Turns Ratio		EMI Fingers	LED (L/R)	Insertion Loss (dB max)	Return Loss (dB min @100Ω±15Ω)			
	TX	RX			0.3-100 MHz	1- 30 MHz	40 MHz	50 MHz	60 - 100 MHz
ARJ11C-MBSAS-A-BA-□ MU2	1CT:1CT	1CT:1CT	Yes	G/YG	-1.2	-16	-13.5	-11.5	-10
ARJ11C-MBSAT-A-B-□ MU2	1CT:1CT	1CT:1CT	Yes	G/Y	-1.2	-16	-13.5	-11.5	-10
ARJ11C-MBSAS-A-B-□ MU2	1CT:1CT	1CT:1CT	Yes	G/Y	-1.2	-16	-13.5	-11.5	-10
ARJ11C-MBSAU- A-B-□ MU2	1CT:1CT	1CT:1CT	Yes	G/Y	-1.2	-16	-13.5	-11.5	-10
ARJ11C-MCSAT- A-B-□ MU2	1CT:1CT	1CT:1CT	Yes	G/Y	-1.1	-15	-15	-15	-12
ARJ11C-MASAA- B-A-□ LU2	1CT:1	1CT:1CT	Yes	Y/G	-1.2	-14	-14	-14	-10
ARJ11C-MASAB- B-A-□ MU2	1CT:1CT	1CT:1CT	Yes	Y/G	-1.2	-14	-14	-14	-10
ARJ11C-MASAD- A-A-□ MU2	1CT:1CT	1CT:1CT	Yes	G/G	-1.2	-14	-14	-14	-10

Part Number	Crosstalk (dB min)			DCMR (dB min)			Hipot (Vrms)
	30 MHz	60 MHz	100 MHz	30 MHz	60 MHz	100 MHz	
ARJ11C-MBSAS-A-BA-□ MU2	-40	-36	-30	-35	-32	-30	1500
ARJ11C-MBSAT-A-B-□ MU2	-40	-36	-30	-35	-32	-30	1500
ARJ11C-MBSAS-A-B-□ MU2	-40	-36	-30	-35	-32	-30	1500
ARJ11C-MBSAU- A-B-□ MU2	-40	-36	-30	-35	-32	-30	1500
ARJ11C-MCSAT- A-B-□ MU2	-35	-26	-24	-35	-32	-30	1500
ARJ11C-MASAA- B-A-□ LU2	-40	-36	-30	-35	-32	-30	1500
ARJ11C-MASAB- B-A-□ MU2	-40	-36	-30	-35	-32	-30	1500
ARJ11C-MASAD- A-A-□ MU2	-40	-36	-30	-35	-32	-30	1500

DCMR: Differential to Common Mode Rejection

Contact Abracon for more custom configurations. See options to build a custom configuration.

□ : LED Polarity Option

ARJ11C-MA: 1 or 2
ARJ11C-MBSAS: 7
ARJ11C-MB: 3 or 4
ARJ11C-MC: 5 or 6

Contact Abracon for more custom configurations. See options to build a custom configuration.

16.00 x 13.6 x 21.5mm/
16.50 x 13.85 x 26.65 mm



RoHS
Compliant

16.00 x 13.6 x 21.5mm/
16.50 x 13.85 x 26.65 mm



ARJ11C - - - -

Mechanical	Schematic	Left LED color (e.g. B for Yellow, AB for Green-Yellow)	Right LED color (e.g. B for Yellow, AB for Green-Yellow)	LED polarity	Turns Ratio (Tx)	Turns Ratio (Rx)	Gold plating
MA ~ MC (Please see mechanical section)	SAA ~ SCB (Please see schematic section)	Blank: No LED	Blank: No LED	Blank: No LED	K: 1CT:1.41	S: 1CT:1.41	1: 3u “
		A: Green	A: Green	1 ~ 7 (Please see 7.0 LED polarity section)	L: 1CT:1	T: 1CT:1	2: 6u “
		B: Yellow	B: Yellow		M: 1CT:1CT	U: 1CT:1CT	3: 15u “
		C: Amber	C: Amber		N: 1.414:1CT	V: 1.414:1CT	4: 30u “
		D: Orange	D: Orange		O: 1CT:1.41CT	W:1CT:1.41CT	5: 50u “
					P: 1:2CT	X: 1:2CT	
					Q: 1:1.414CT	Y: 1:1.414CT	
					R: 1CT:2.5	Z: 1CT:2.5	



MA





MC



MB



MD



ABRACON®

5101 Hidden Creek Ln Spicewood TX 78669
Phone: 512-371-6159 | Fax: 512-351-8858
For terms and conditions of sales, please visit:
www.abracon.com

REVISED: 12.10.2018

ABRACON IS
ISO9001-2015
CERTIFIED

RJ45 10/100/1000 Base-T Jack with Magnetic Module


ARJ11C

RoHS
Compliant



16.00 x 13.6 x 21.5mm/
16.50 x 13.85 x 26.65 mm

SCHEMATICS

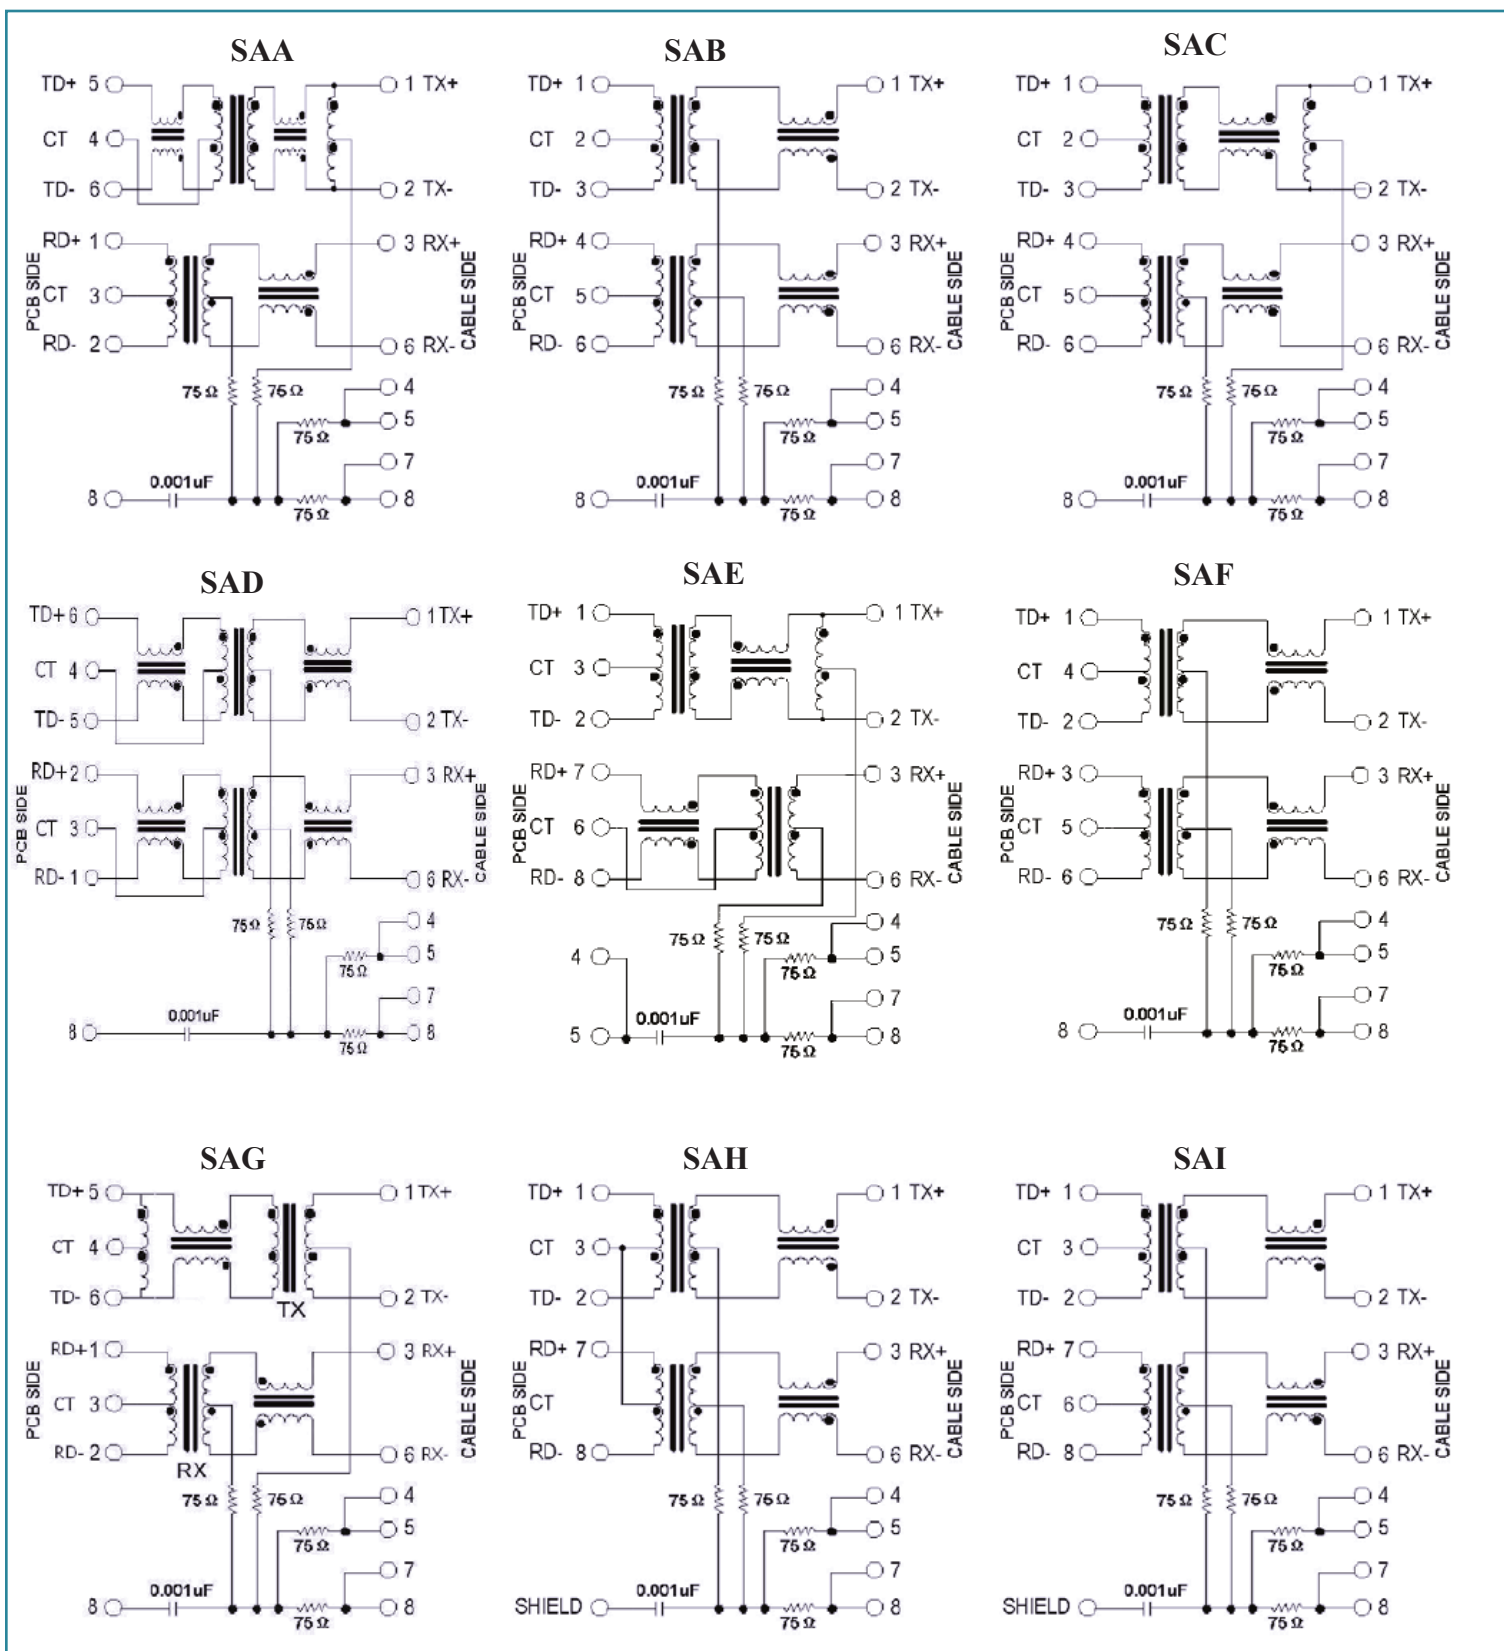

RJ45 10/100/1000 Base-T Jack with Magnetic Module










ARJ11C

RoHS
Compliant



16.00 x 13.6 x 21.5mm/
16.50 x 13.85 x 26.65 mm

SCHEMATICS

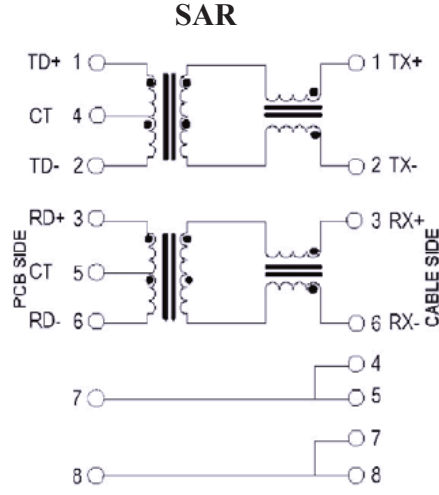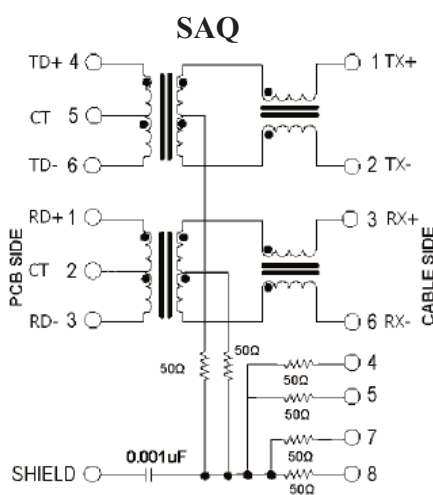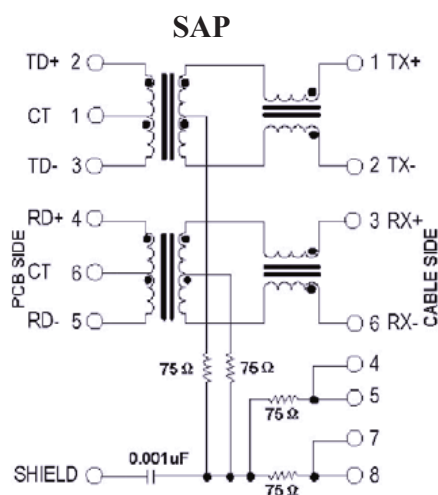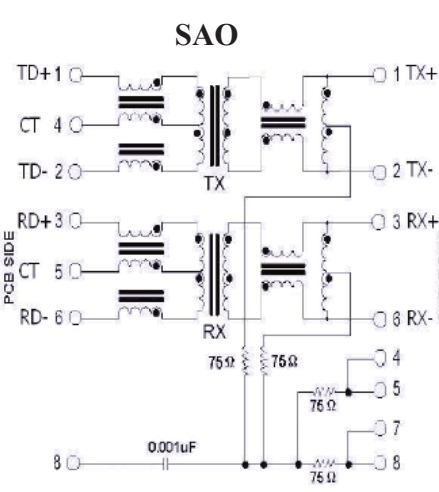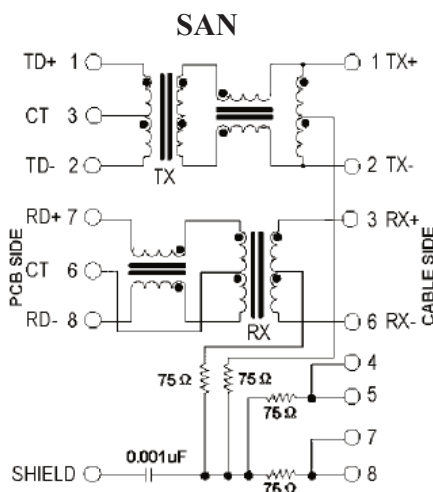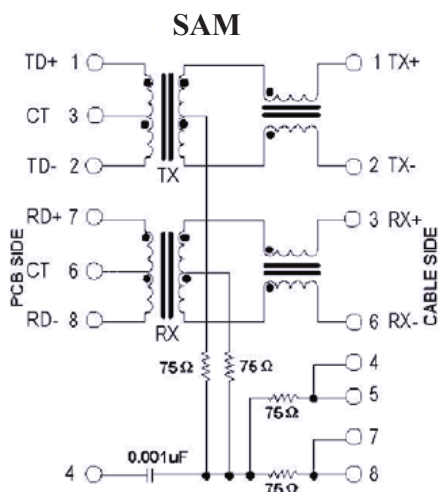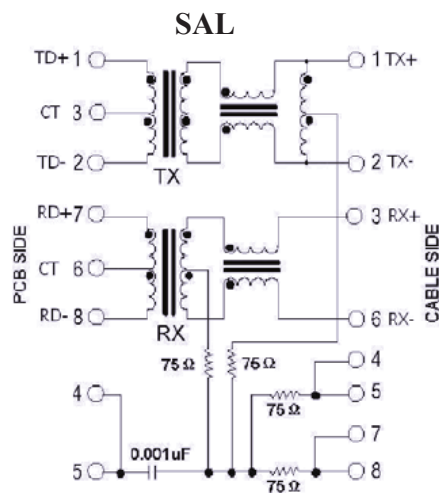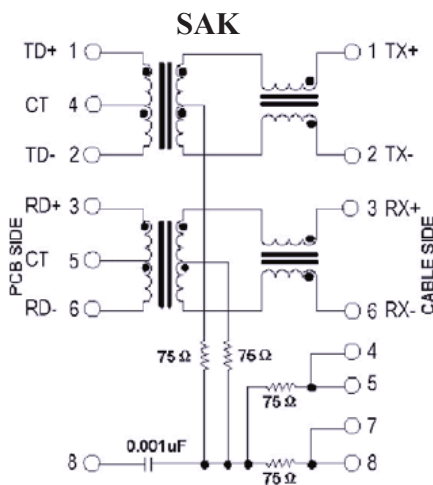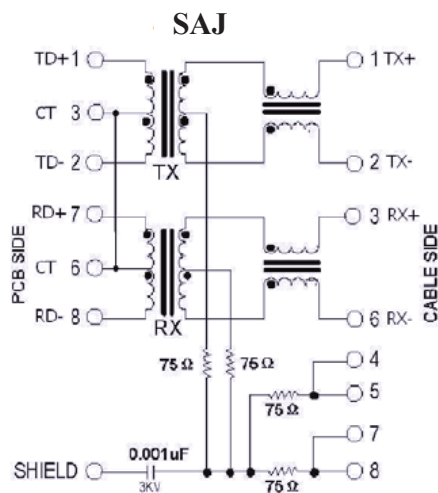

RJ45 10/100/1000 Base-T Jack with Magnetic Module


ARJ11C

RoHS
Compliant




SCHEMATICS


SAS

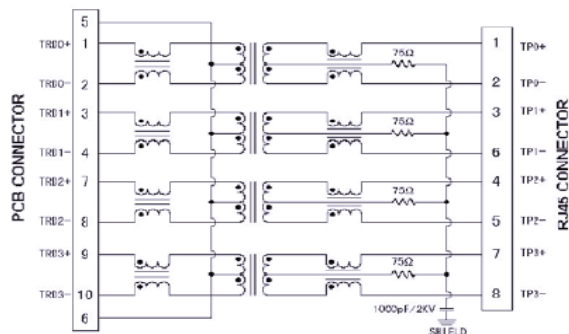


SAT

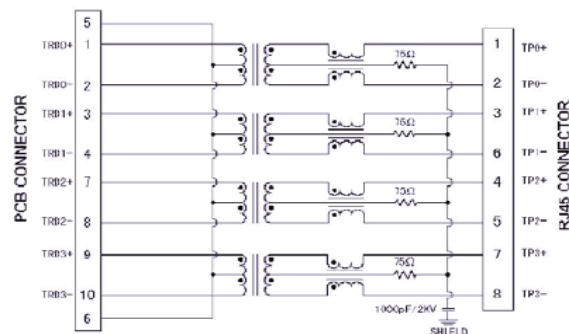


SAU

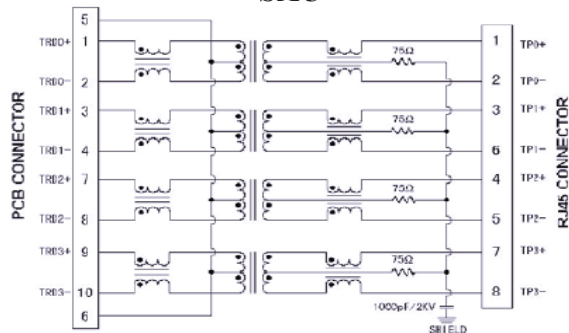


SAV

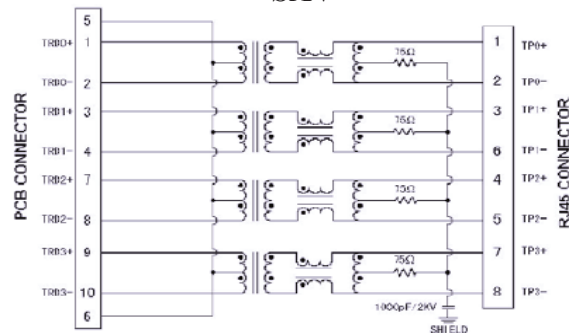


SAW

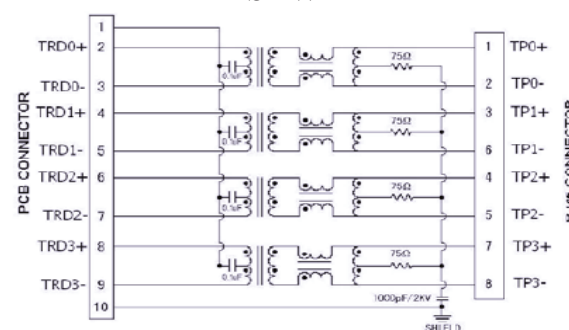


SAX

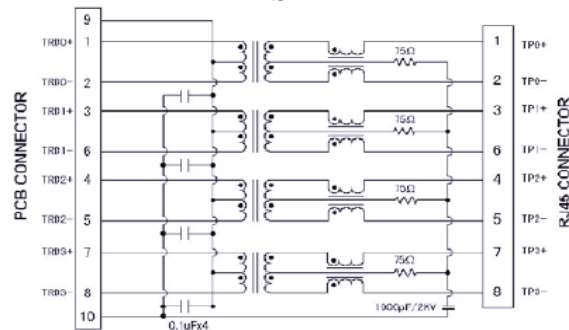

SAY

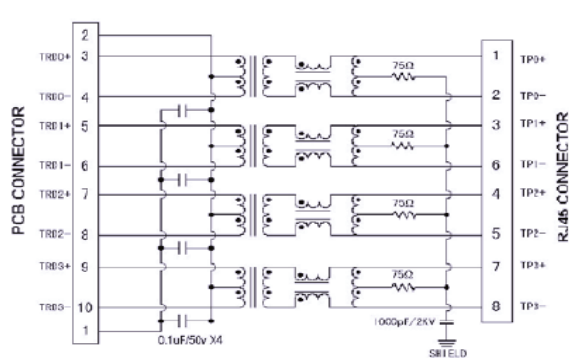

SAZ

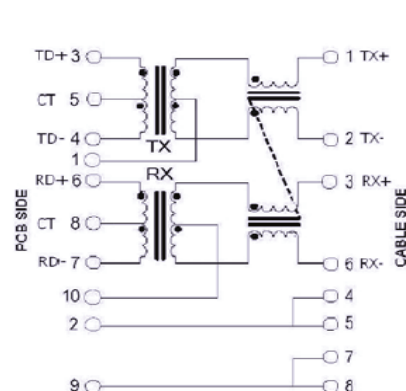

RJ45 10/100/1000 Base-T Jack with Magnetic Module

ARJ11C


RoHS
Compliant




16.00 x 13.6 x 21.5mm/
16.50 x 13.85 x 26.65 mm

SCHEMATICS


SBA

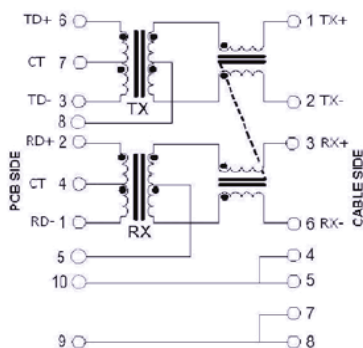


SBB




SBC

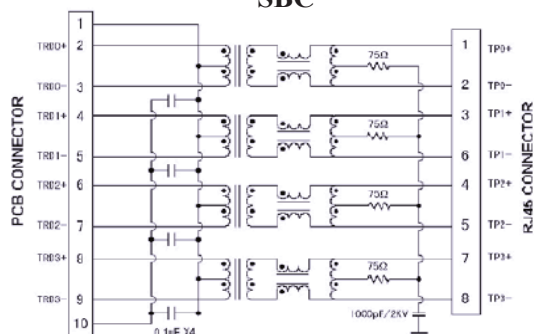


SBD

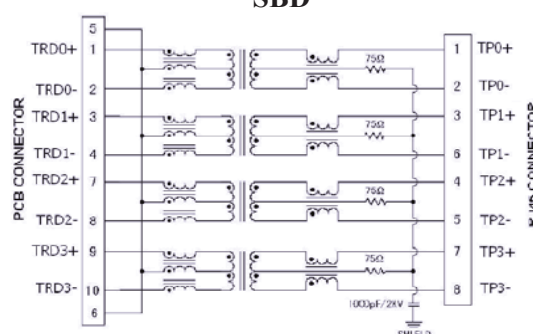


SBE

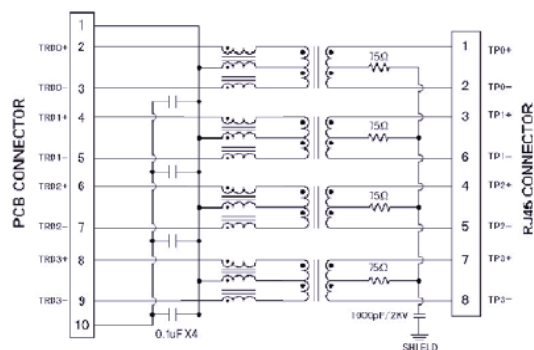


SBF

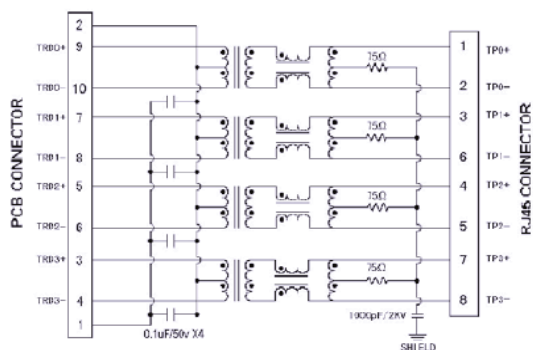

SBG

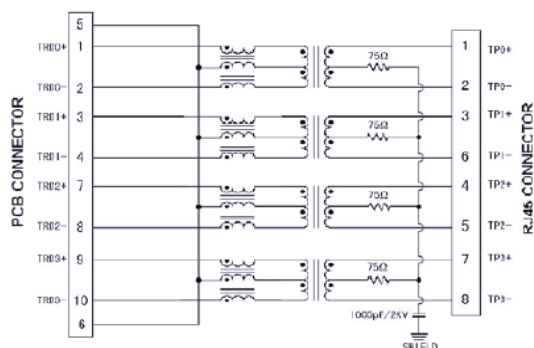

SBH

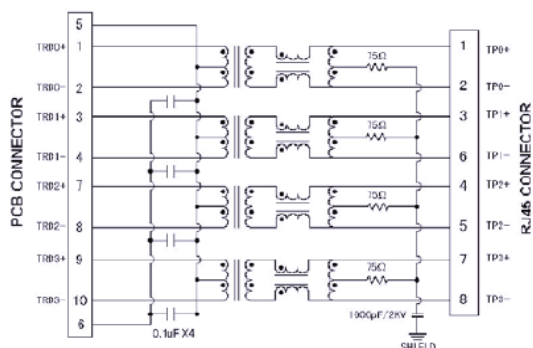

RJ45 10/100/1000 Base-T Jack with Magnetic Module









ARJ11C

RoHS
Compliant



16.00 x 13.6 x 21.5mm/
16.50 x 13.85 x 26.65 mm

LED POLARITY

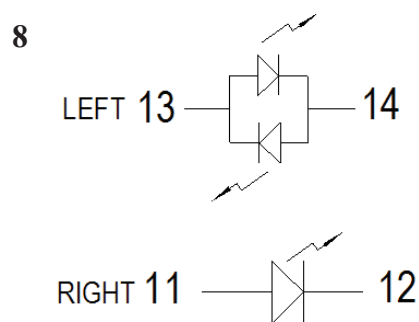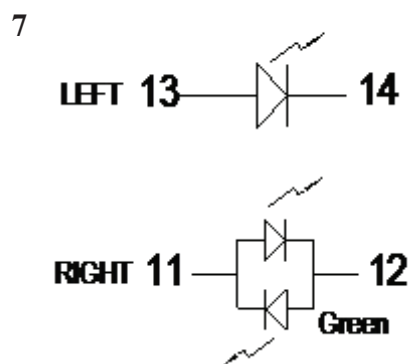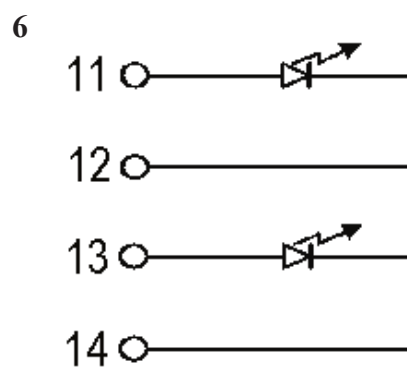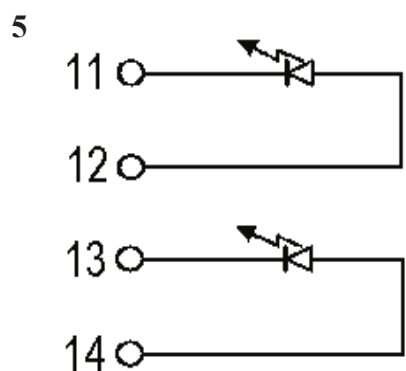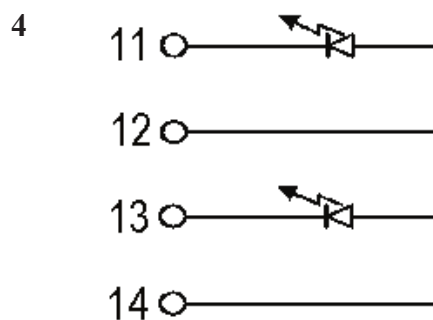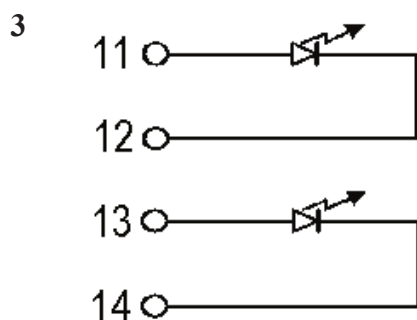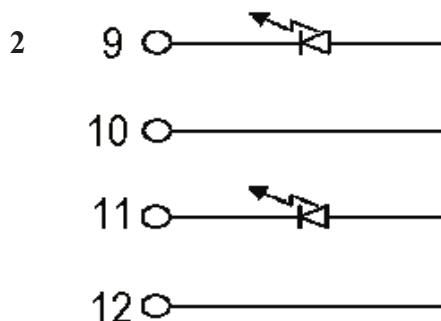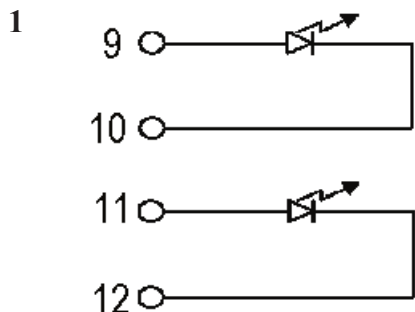

RJ45 10/100/1000 Base-T Jack with Magnetic Module


ARJ11C

RoHS
Compliant



16.00 x 13.6 x 21.5mm/
16.50 x 13.85 x 26.65 mm



REFLOW PROFILE

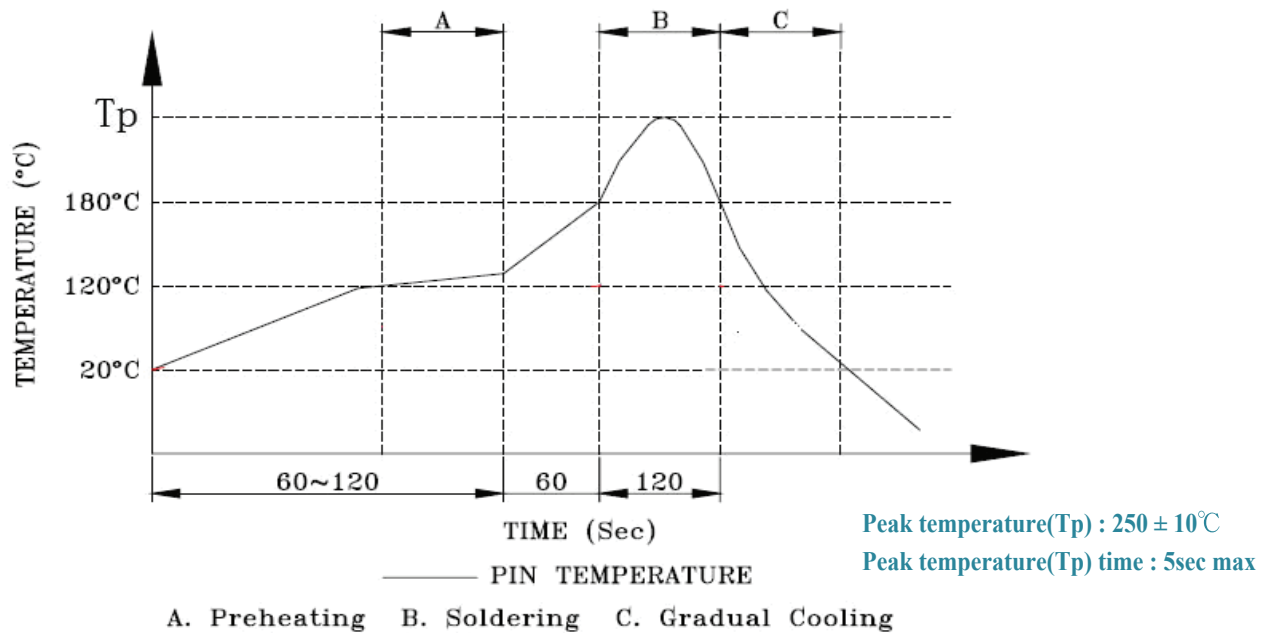

TAPE & REEL:

Packing 60pcs/tray
Packaging material: PET

Outer carton unit 1320 pcs/ 22 Trays/box

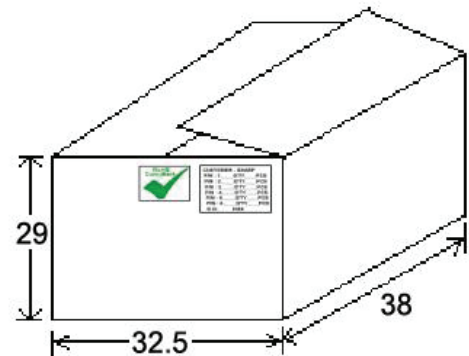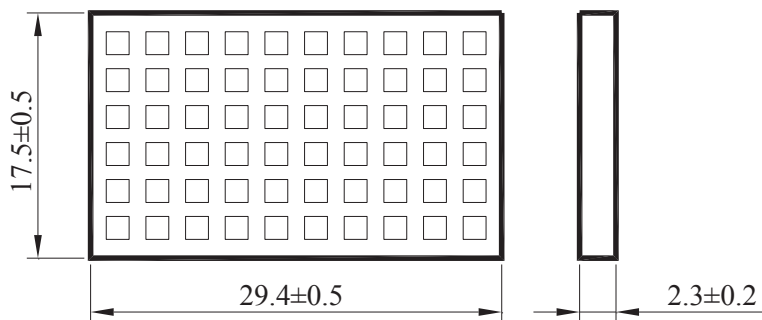

Dimensions: cm

ATTENTION: Abracon LLC's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependent Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon LLC is required. Please contact Abracon LLC for more information.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ABRACON:

[ARJ11C-MASAA-B-A-1LU2](#) [ARJ11C-MASAA-B-A-2LU2](#) [ARJ11C-MASA-A-B-EM2](#) [ARJ11C-MASAB-B-A-1MU2](#)
[ARJ11C-MASAB-B-A-2MU2](#) [ARJ11C-MASAD-A-A-1MU2](#) [ARJ11C-MASAD-A-A-2MU2](#) [ARJ11C-MASB-AB-A-FM2](#)
[ARJ11C-MASD-AB-A-FM2](#) [ARJ11C-MBSAS-A-B-7MU2](#) [ARJ11C-MBSAS-A-BA-7MU2](#) [ARJ11C-MBSAT-A-B-3MU2](#)
[ARJ11C-MBSAT-A-B-4MU2](#) [ARJ11C-MBSAU-A-B-3MU2](#) [ARJ11C-MBSAU-A-B-4MU2](#) [ARJ11C-MBSC-L2](#) [ARJ11C-](#)
[MCSAT-A-B-5MU2](#) [ARJ11C-MCSAT-A-B-6MU2](#)