

Bus system cable - SAC-4P-M12MS/ 5,0-990 - 1558331

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Bus system cable, CC link (10 Mbps), 4-position, PVC, red, shielded, Plug straight M12, A-coded, on free cable end, Cable length: 5 m



Key Commercial Data

| | |
|--------------------------------------|----------|
| Packing unit | 1 pc |
| Minimum order quantity | 50 pc |
| Weight per Piece (excluding packing) | 400.0 g |
| Custom tariff number | 85444290 |
| Country of origin | Poland |

Technical data

Dimensions

| | |
|--|-------|
| Length of cable | 5 m |
| Stripping length of the free conductor end | 50 mm |

Ambient conditions

| | |
|---------------------------------|----------------------------------|
| Ambient temperature (operation) | -25 °C ... 90 °C (Plug / socket) |
| Degree of protection | IP65 |
| | IP67 |

General

| | |
|-----------------------|------------------|
| Rated current at 40°C | 4 A |
| Rated voltage | 250 V |
| Number of positions | 4 |
| Insulation resistance | ≥ 100 MΩ |
| Coding | A - standard |
| Signal type/category | CC link, 10 Mbps |
| Status display | No |

Bus system cable - SAC-4P-M12MS/ 5,0-990 - 1558331

Technical data

General

| | |
|-----------------------------|------------------------|
| Overvoltage category | II |
| Degree of pollution | 3 |
| Insertion/withdrawal cycles | ≥ 100 |
| Torque | 0.4 Nm (M12 connector) |

Material

| | |
|--|---|
| Flammability rating according to UL 94 | HB |
| Contact material | CuZn |
| Contact surface material | Ni/Au |
| Contact carrier material | TPU GF |
| Material of grip body | TPU, hardly inflammable, self-extinguishing |
| Material, knurls | Zinc die-cast, nickel-plated |
| Sealing material | NBR |

Pin assignment

| | |
|--|------------------------|
| Position = wire color (signal) = position (optional) | 1 (Plug) = SR (shield) |
| | 2 (Plug) = WH (DB) |
| | 3 (Plug) = YE (DG) |
| | 4 (Plug) = BU (DA) |

Standards and Regulations

| | |
|--|----|
| Flammability rating according to UL 94 | HB |
|--|----|

Cable

| | |
|---|--|
| Cable type | CC-Link |
| Cable type (abbreviation) | 990 |
| Conductor cross section | 0.5 mm ² |
| AWG signal line | 20 |
| Conductor structure signal line | 7x 0.28 mm |
| Thickness, insulation | 0.89 mm (Outer cable sheath) |
| Wire colors | white, yellow, blue |
| Shielding | Plastic-coated aluminum foil, tinned copper braided shield |
| Optical shield covering | 78 % |
| External sheath, color | red |
| External cable diameter | 7.70 mm |
| Smallest bending radius, fixed installation | 77 mm |
| Cable weight | 78.8 kg/km |
| Outer sheath, material | PVC |
| Material conductor insulation | foamed PE, with high density |

Bus system cable - SAC-4P-M12MS/ 5,0-990 - 1558331

Technical data

Cable

| | |
|---------------------------------|--|
| Conductor material | Bare Cu litz wires |
| Conductor resistance | 31.2 Ω /km |
| Working capacitance | 61 pF |
| Wave impedance | 110 Ω |
| Nominal voltage, cable | 300 V |
| Ambient temperature (operation) | -30 °C ... 60 °C (cable, fixed installation) |
| | -5 °C ... 60 °C (cable, flexible installation) |

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27060306 |
| eCl@ss 4.1 | 27060306 |
| eCl@ss 5.0 | 27061801 |
| eCl@ss 5.1 | 27061801 |
| eCl@ss 6.0 | 27061801 |
| eCl@ss 7.0 | 27061801 |
| eCl@ss 8.0 | 27279218 |
| eCl@ss 9.0 | 27060311 |

ETIM

| | |
|----------|----------|
| ETIM 3.0 | EC001855 |
| ETIM 4.0 | EC001855 |
| ETIM 5.0 | EC001855 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 31251501 |
| UNSPSC 7.0901 | 31251501 |
| UNSPSC 11 | 31251501 |
| UNSPSC 12.01 | 31251501 |
| UNSPSC 13.2 | 31251501 |

Approvals

Approvals

Approvals

EAC

Bus system cable - SAC-4P-M12MS/ 5,0-990 - 1558331

Approvals

Ex Approvals


Approvals submitted

Approval details

EAC


Drawings

Schematic diagram




Pin assignment M12 plug, 4-pos., A-coded, view plug side

Dimensional drawing

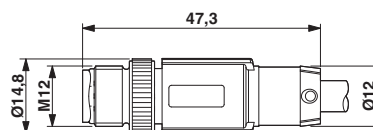

Plug, M12 x 1, straight, shielded

Circuit diagram

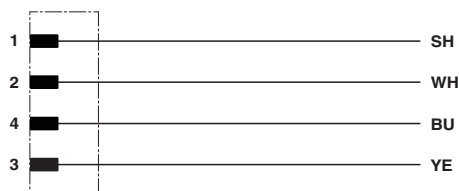

Contact assignment of the M12 connector

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Phoenix Contact:

1558331