


LOC	DIST	REVISIONS				
CM	00	P	LTR	DESCRIPTION	DATE	DWN
			B1	REVISED PER ECO-08-027061	05NOV08	CC

1. WIRE RANGE: 1.31mm² (16 AWG)
2. INSULATION RANGE: 3.10 [.122] DIA.
- 3 FINISH: 0.76μm [.000030 in] GOLD IN LOCALIZED GOLD PLATE AREA OVER 1.27μm [.00005 in] MINIMUM NICKEL.
- 4 FINISH: 2.54μm [.00001 in] MINIMUM TIN IN LOCALIZED TIN PLATE AREA.

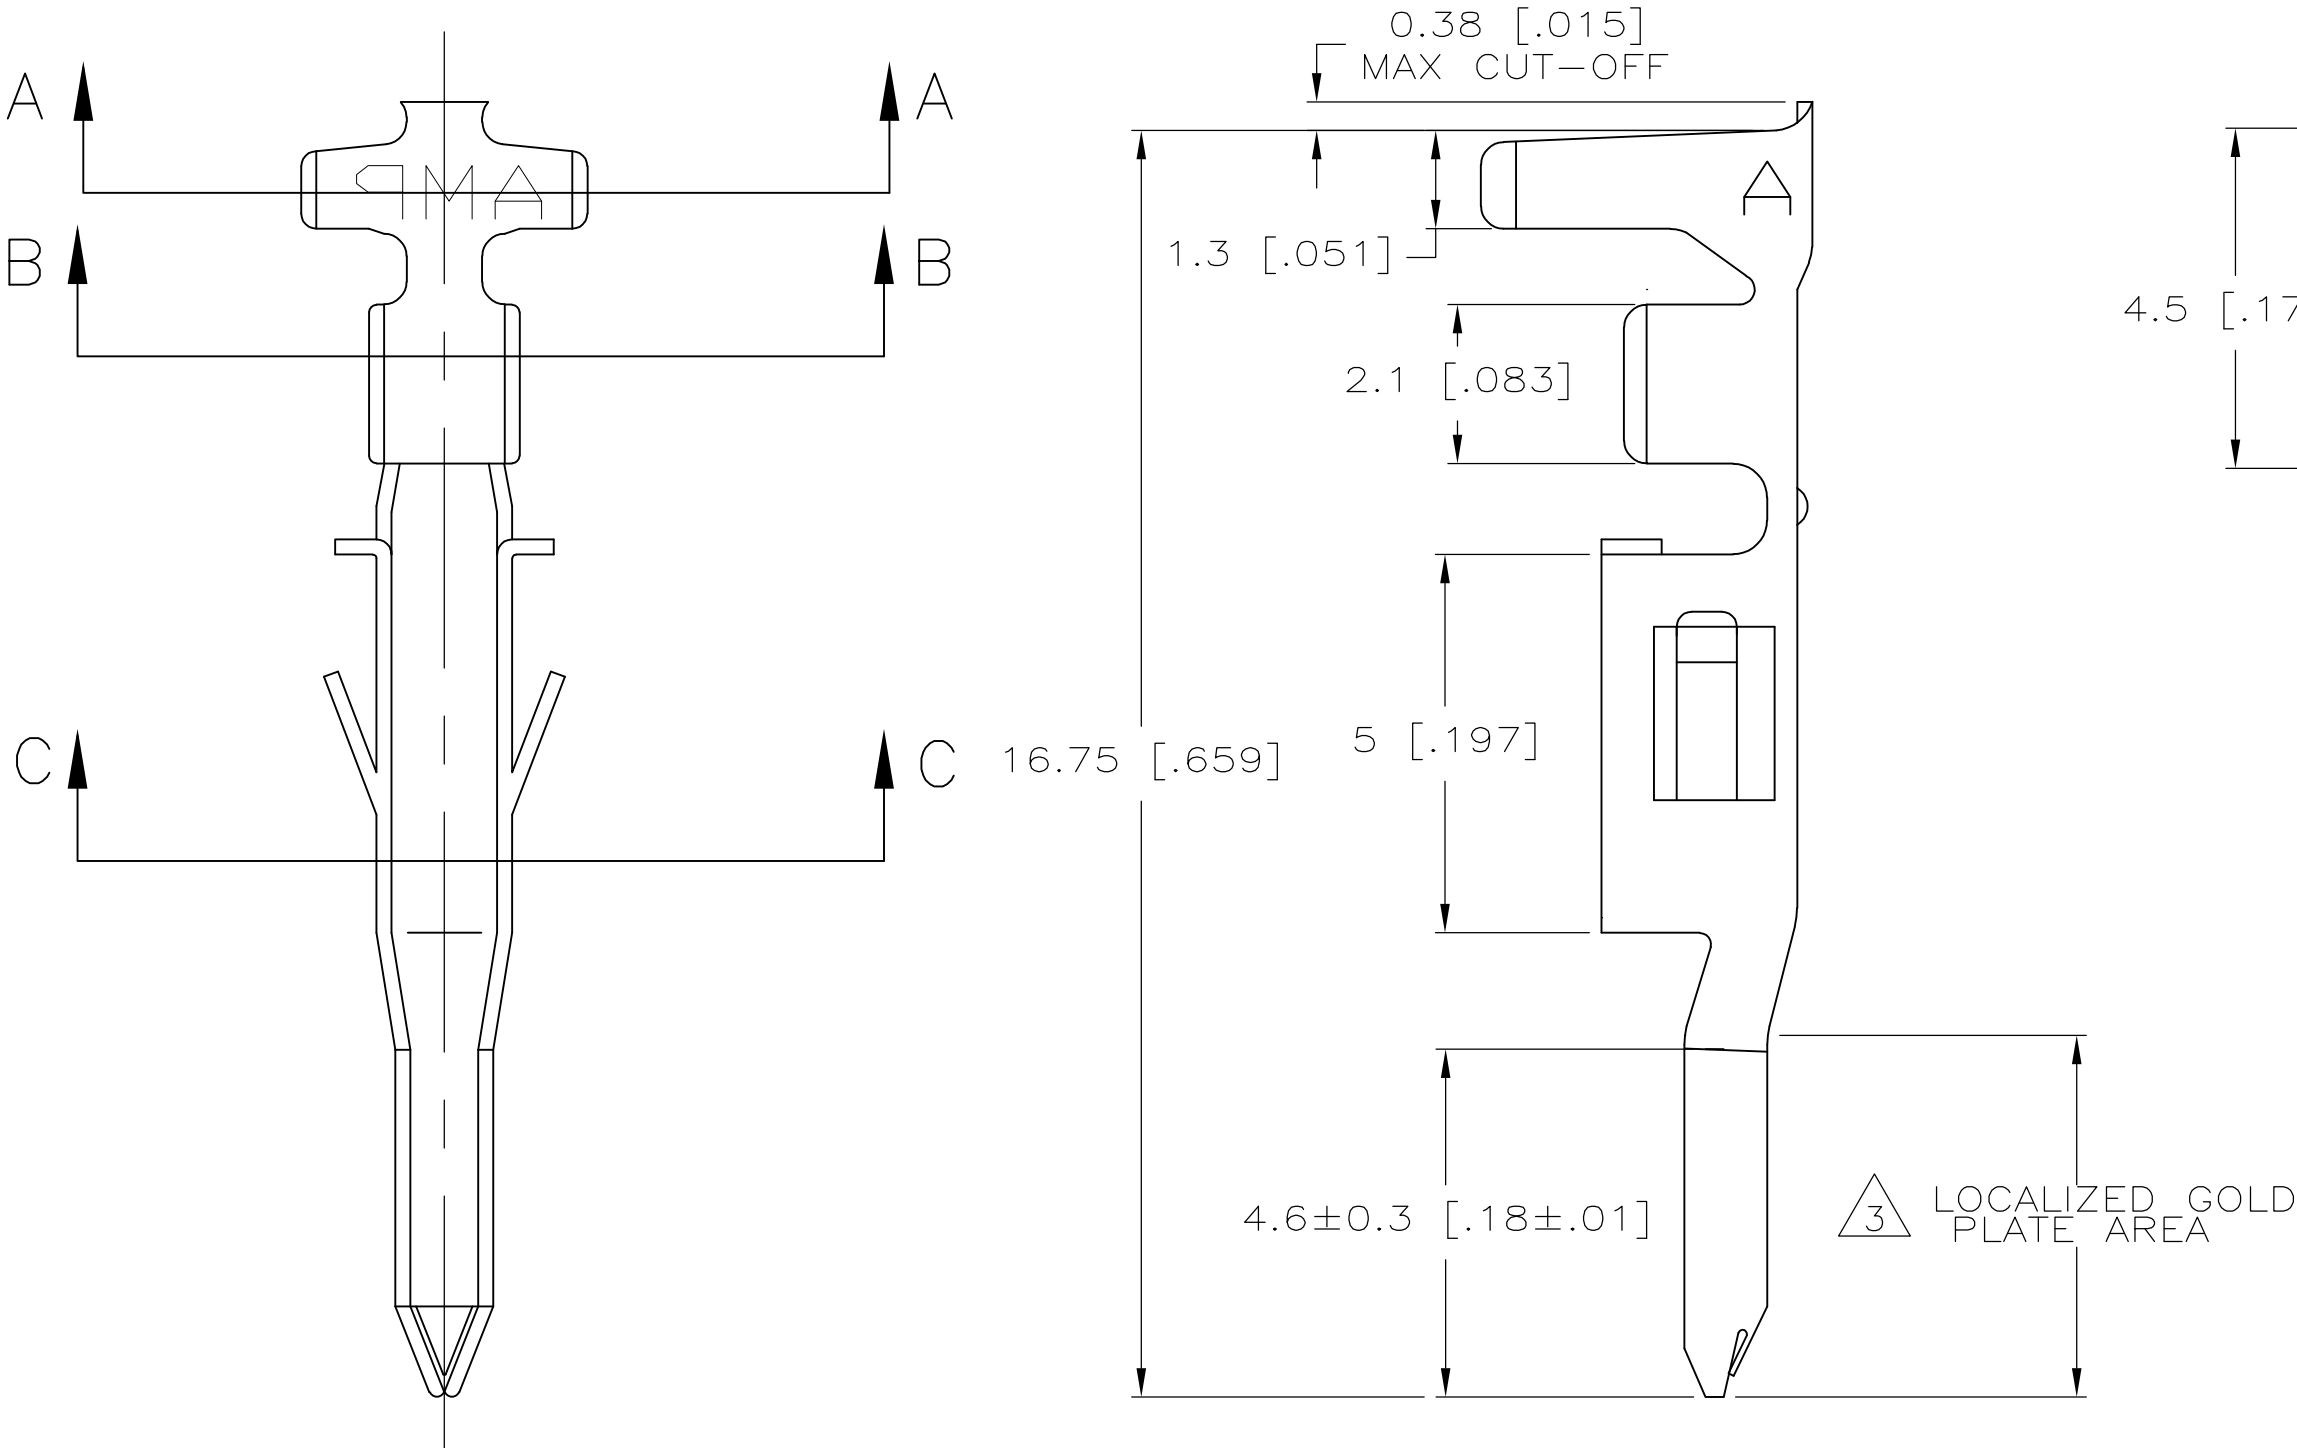

	PHOS. BRZ.	1586840-4
PRE-TIN	PHOS. BRZ.	1586840-3
	BRASS	1586840-2
PRE-TIN	BRASS	1586840-1
FINISH	MATERIAL	PART NO.

METRIC

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 04APR2007		 Tyco Electronics Corporation Harrisburg, PA 17105-3608									
DIMENSIONS: mm [INCHES]		CHK C.CASH 04APR2007											
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD C. CASH 04APR2007		NAME TERMINAL, PIN (LOOSE PIECE) VAL-U-LOK(TM)								
	0 PLC ± 1 PLC ± 2 PLC ± 0.13 [.005] 3 PLC ± 4 PLC ± ANGLES ± 0°30'		PRODUCT SPEC										
	MATERIAL		APPLICATION SPEC		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO		
			WEIGHT		A2		00779		C=1586840				
CUSTOMER DRAWING				SCALE		10:1		SHEET		1 of 1		REV B1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1586840-2](#)