


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	E1	REDRAWN PER ECO-17-007400	13DEC2017	RS	DR

AMP WIRE RANGE	 Listed FILE E13288	 LR7189 Certified
16-14 AWG SOLID OR STRANDED	16-14 AWG SOLID OR STRANDED	16-14 AWG SOLID OR STRANDED

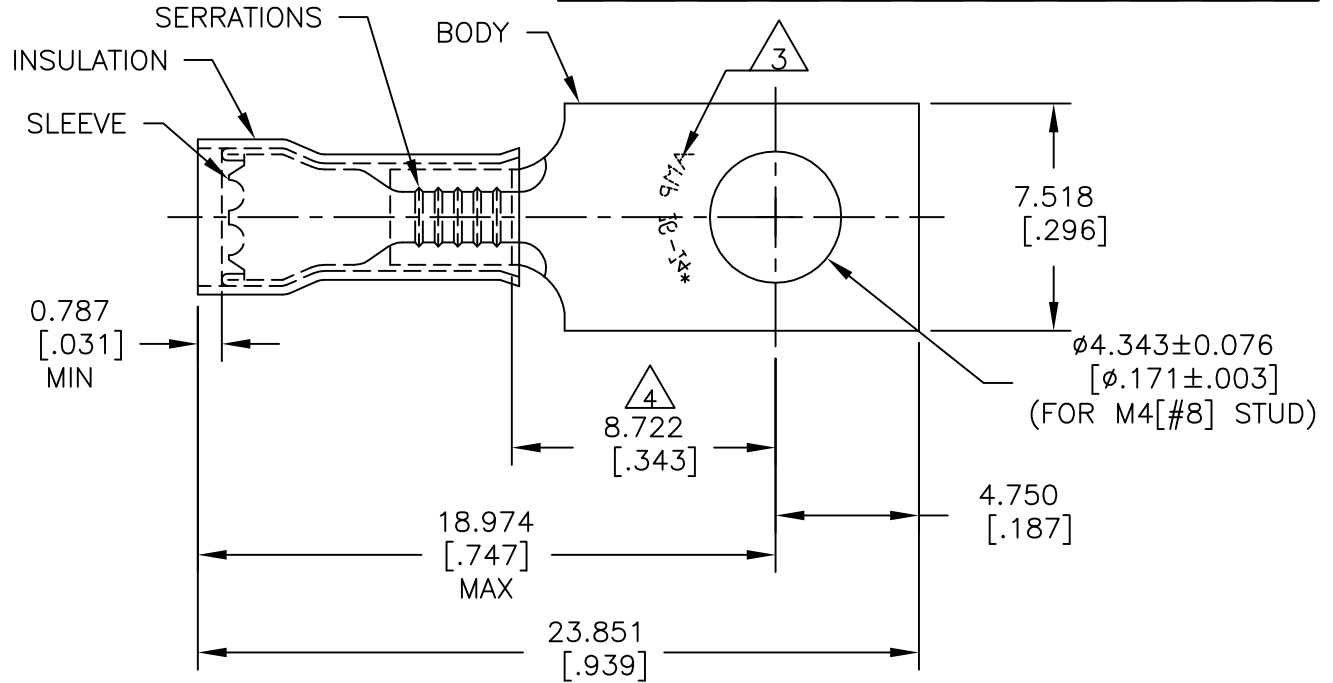

- 1 BODY MATERIAL THK 0.787 ± 0.051 [$.031 \pm .002$]
 2 FOR $\varnothing 2.921$ [$\varnothing .115$] TO $\varnothing 4.318$ [$\varnothing .170$] WIRE INSULATION.

 STAMP AMP 16-14* APPROX AS SHOWN.

 APPLIES FROM EDGE OF METAL WIRE BARREL TO CENTER OF STUD HOLE

 MATERIAL:
 BODY & SLEEVE: COPPER PER ASTM B-152
 INSULATION: NYLON

 FINISH:
 BODY & SLEEVE: TIN PLATE PER ASTM B 545
 INSULATION: COLOR-BLUE.

1000	LOOSE PIECE	321283
QTY.	PACKAGE TYPE	PART NUMBER

DIMENSIONS: mm [INCHES]		DWN RAVI S	13DEC2017	MATERIAL 5		FINISH 6	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.127[.005] 4 PLC ± - ANGLES ± -		CHK ROHDE DANIEL F	13DEC2017	TE TE Connectivity			
		APVD ROHDE DANIEL F	13DEC2017				
		PRODUCT SPEC UL 486 A-B		NAME WIRE TERMINAL, P.I.D.G, RECTANGULAR TONGUE, WIRE SIZE: 16-14 AWG			
		APPLICATION SPEC 114-2157		SIZE A4	CAGE CODE 00779	DRAWING NO C-321283	RESTRICTED TO —
		WEIGHT —		CUSTOMER DRAWING			
				SCALE 1:1	SHEET 1 OF 1	REV E1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[321283](#)