

Master cable - SAC-12P- 5,0-PUR/M12FS MC - 1530786

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Master cable, 12-position, PUR/PVC, black RAL 9005, free cable end, on Socket straight M12, A-coded, Cable length: 5 m



Key Commercial Data

Packing unit	1 pc
Weight per Piece (excluding packing)	240.0 g
Custom tariff number	85444290
Country of origin	Germany

Technical data

General

Rated voltage	30 V
Number of positions	12
Flammability rating according to UL 94	HB

Ambient conditions

Degree of protection	IP68
----------------------	------

Insulation material

Contact material	CuSn
Contact surface material	Au

Standards and Regulations

Standard designation	M12 connector
Standards/regulations	IEC 61076-2-101
Flammability rating according to UL 94	HB

Master cable - SAC-12P- 5,0-PUR/M12FS MC - 1530786

Classifications

eCl@ss

eCl@ss 4.0	27060306
eCl@ss 4.1	27060306
eCl@ss 5.0	27061801
eCl@ss 5.1	27061801
eCl@ss 6.0	27061801
eCl@ss 7.0	27061801
eCl@ss 8.0	27279218
eCl@ss 9.0	27060311

ETIM

ETIM 2.0	EC000830
ETIM 3.0	EC001855
ETIM 4.0	EC001855
ETIM 5.0	EC001855

UNSPSC

UNSPSC 6.01	31251501
UNSPSC 7.0901	31251501
UNSPSC 11	31251501
UNSPSC 12.01	31251501
UNSPSC 13.2	31251501

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approvals submitted

Approval details


Master cable - SAC-12P- 5,0-PUR/M12FS MC - 1530786

Approvals

EAC

Drawings

Circuit diagram

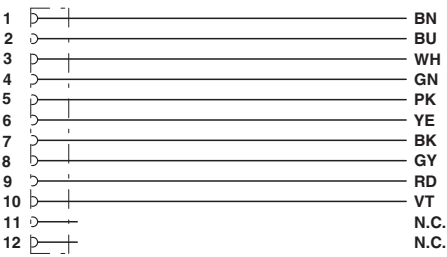

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Phoenix Contact:

1530786