
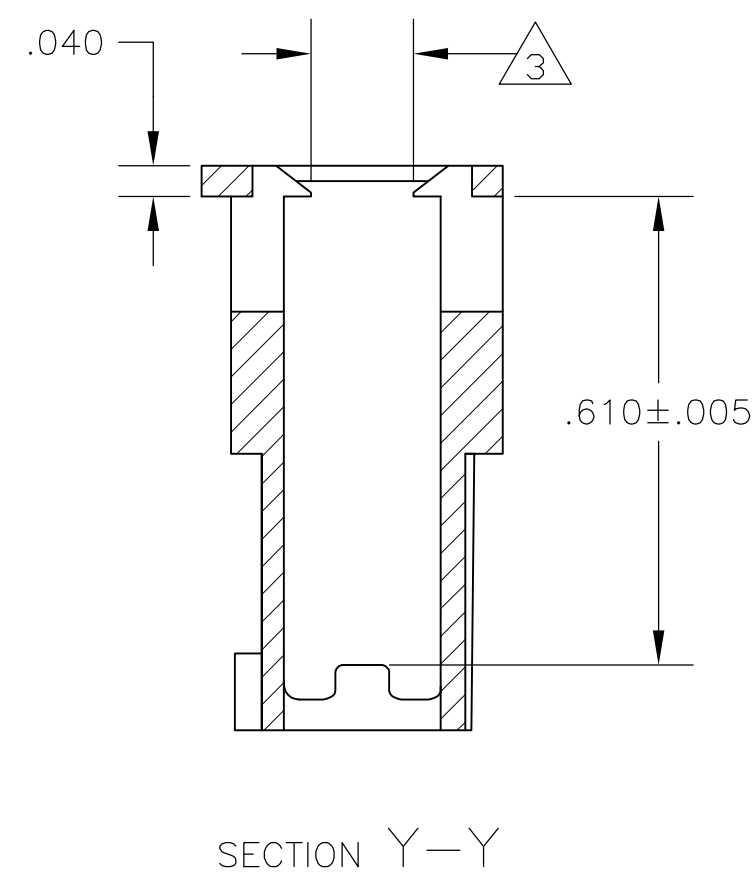
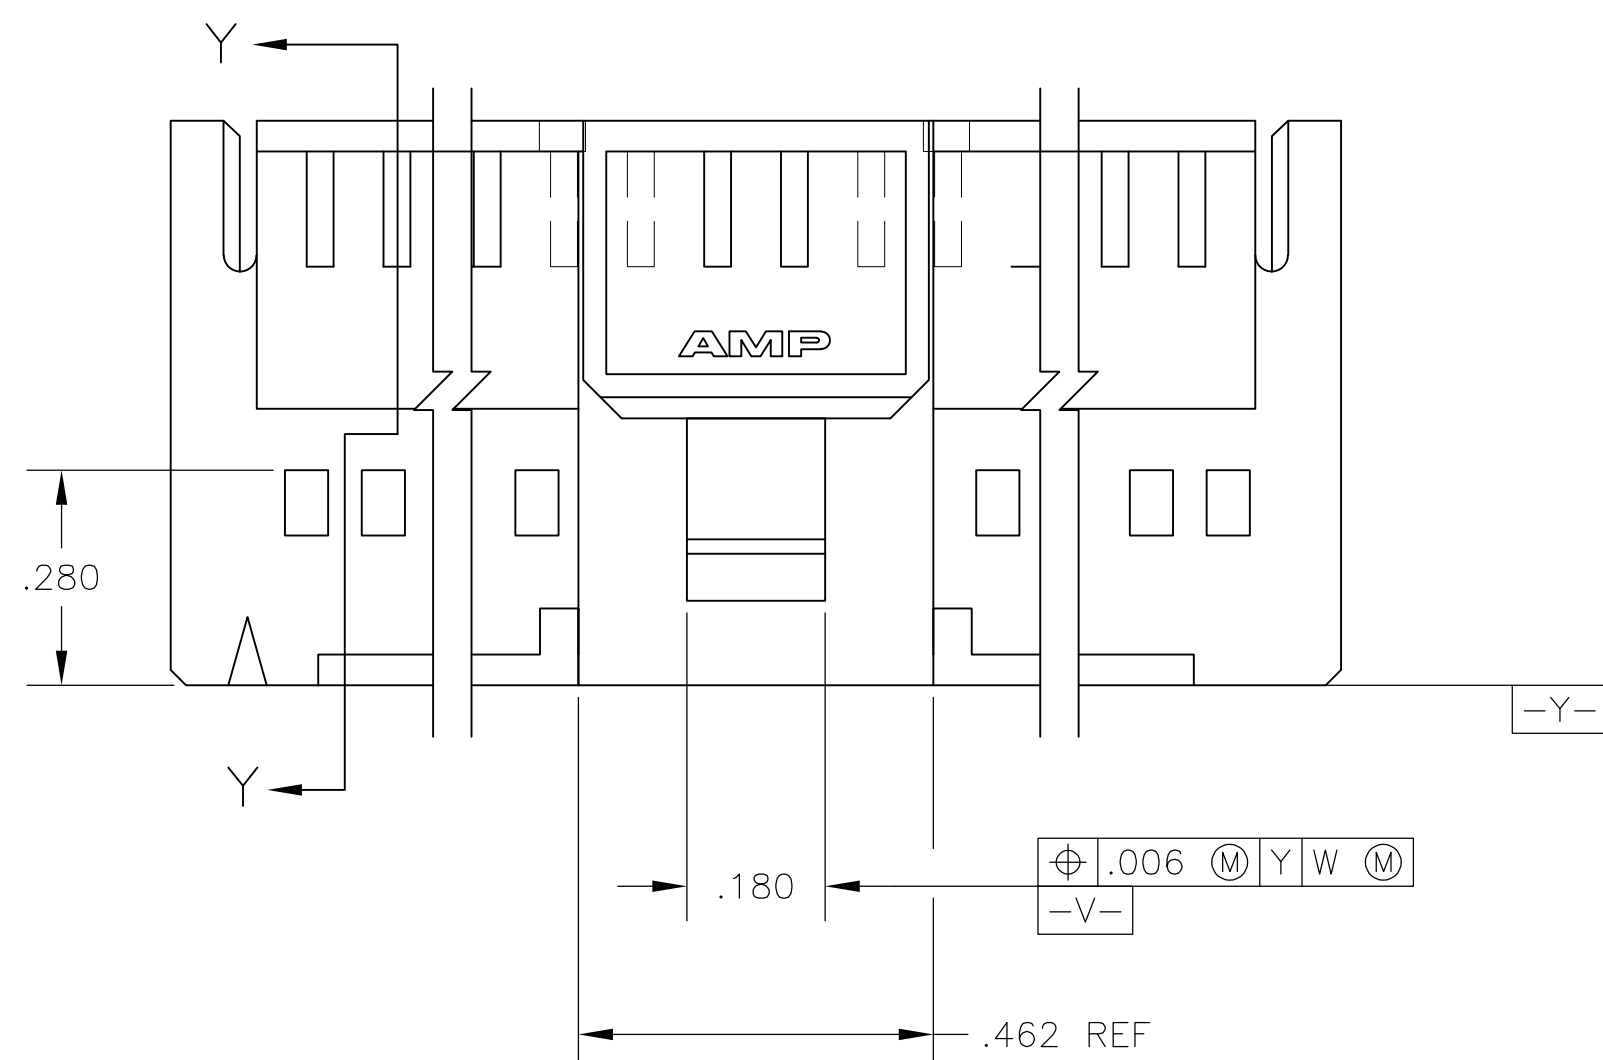
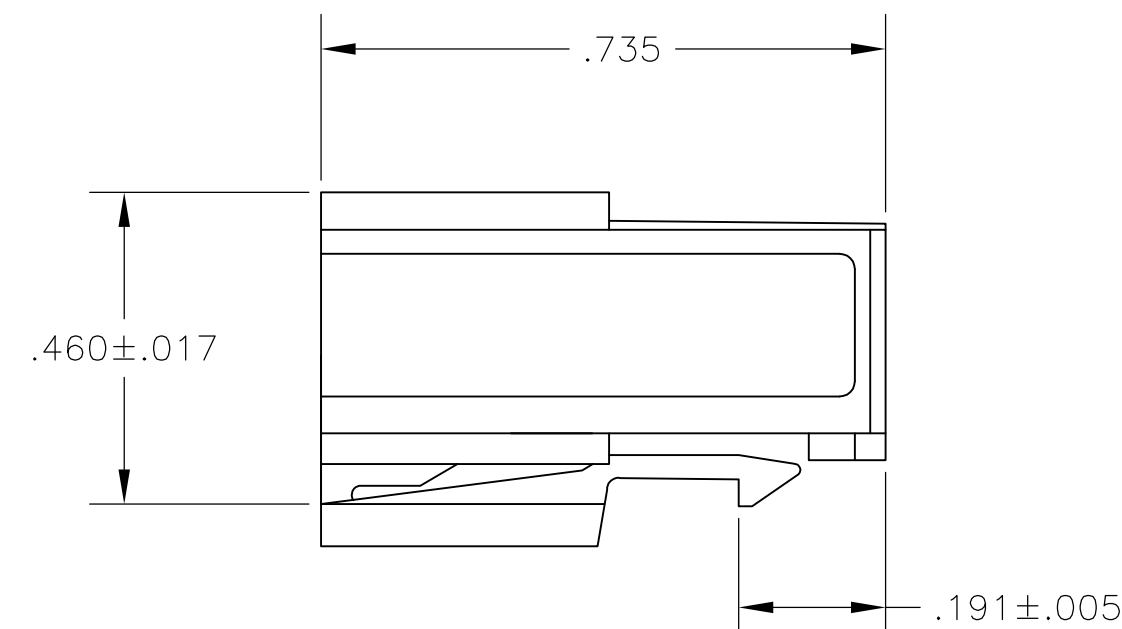
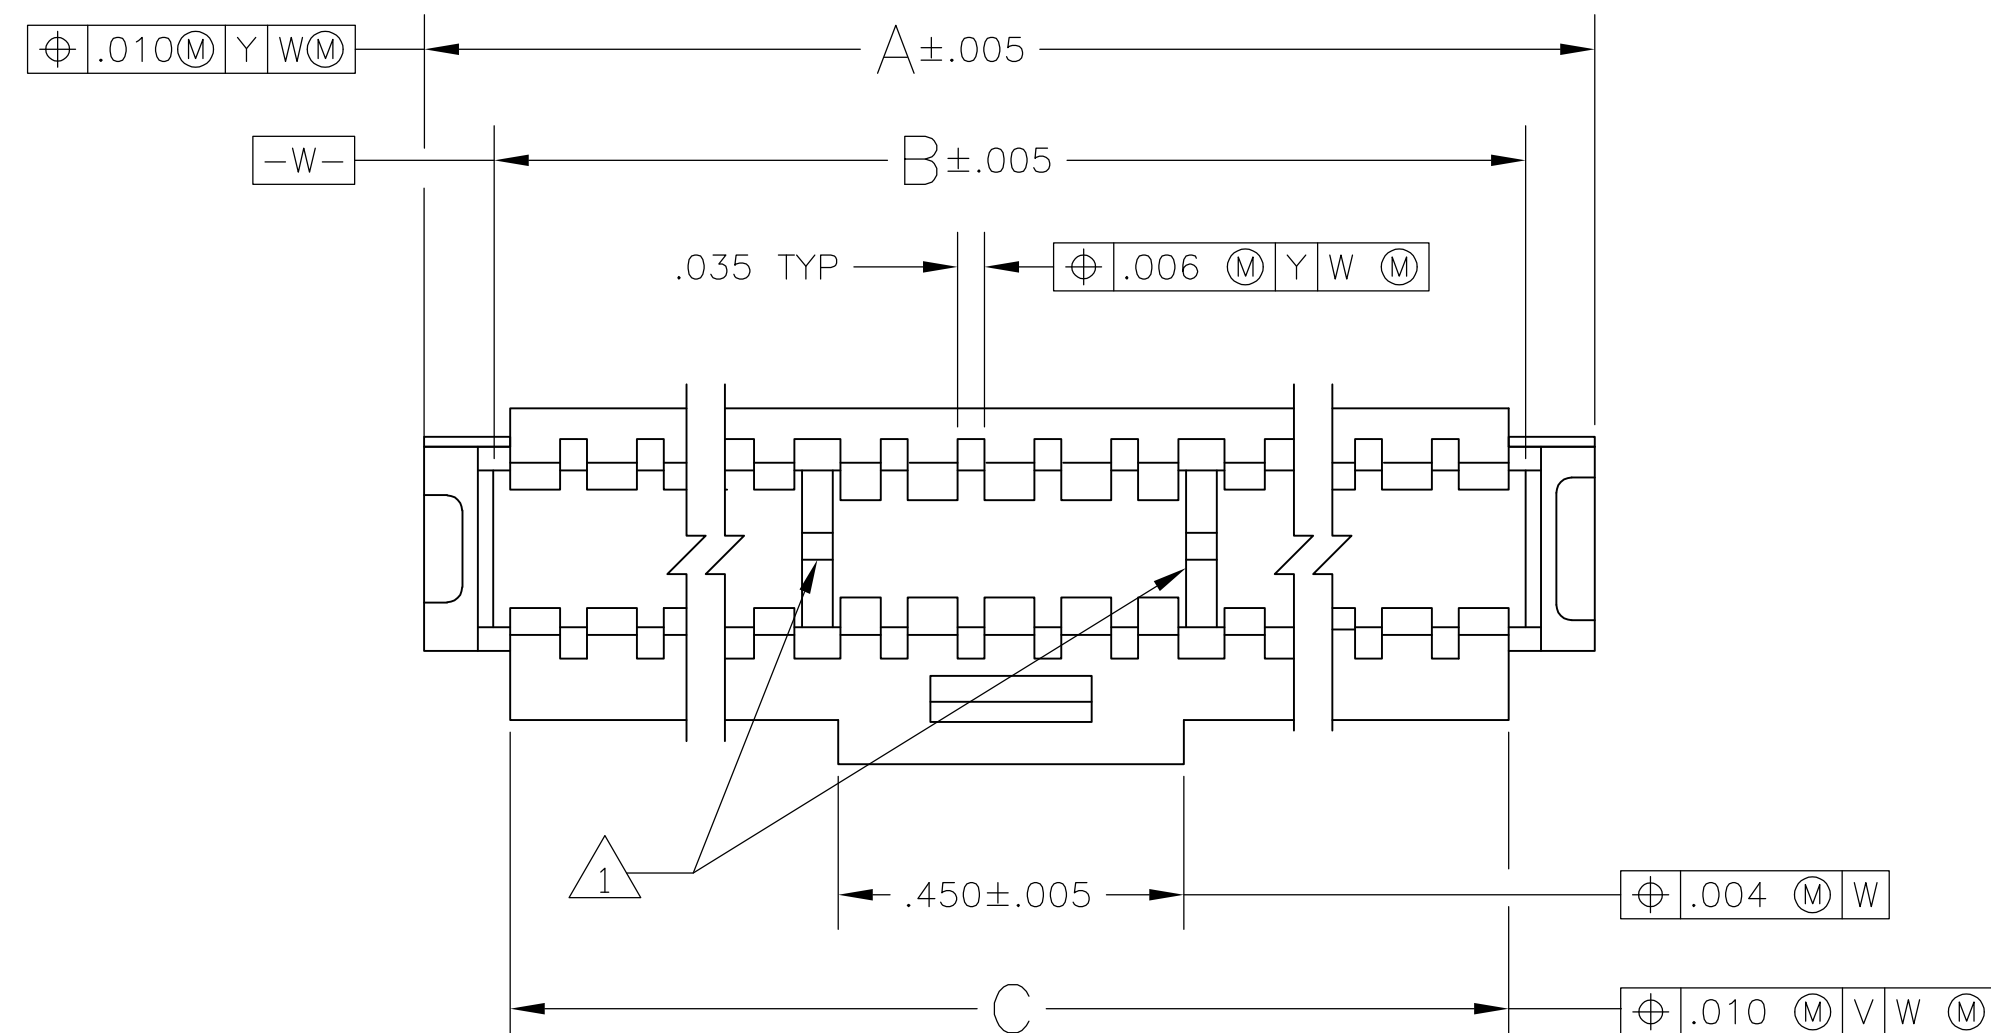


LOC		DIST		REVISIONS					
AD		00		P	LTR	DESCRIPTION	DATE	DWN	APVD
					L2	REVISED PER ECO-11-004917	11MAR11	RK	HMR



- 1 SEE TABLE FOR RIB QTY
2. THIS COUPLING SHROUD IS TO BE USED WITH AMPMODU® MTE RECEPTACLE ASSEMBLIES WITH GUIDE RIBS
THE NUMBER OF POSITIONS LISTED EQUALS THE TOTAL NUMBER OF POSITIONS WHICH CAN BE CONTAINED WITHIN THE COUPLING SHROUD
- 3 .133 BETWEEN RIBS REFERENCED BY NOTE 1 ONLY. .153 ON ENDS (AREAS OUTSIDE OF THE RIBS).
- 4 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

	2.460	2.505	2.685	2	50	1-104500-1
	1.960	2.005	2.085	2	40	1-104500-0
4 OBSOLETE	1.660	1.705	1.885	2	34	104500-9
	1.560	1.605	1.785	2	32	104500-8
	1.460	1.505	1.685	2	30	104500-7
OBSOLETE	1.360	1.405	1.585	2	28	104500-6
4	1.260	1.305	1.485	2	26	104500-5
	1.160	1.205	1.385	2	24	104500-4
	1.060	1.105	1.285	2	22	104500-3
	.960	1.005	1.185	2	20	104500-2
4 OBSOLETE	.860	.905	1.085	2	18	104500-1
	C	B	A	NO OF RIBS	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN D. KEITZER	01DEC88	 TE Connectivity	
		CHK S. SHUEY	07DEC88		
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	COUPLING SHROUD, AMPMODUTE, DOUBLE ROW, .100X.100 CL
		APWD C.SINISI			
MATERIAL FLAME RETARDANT THERMOPLASTIC COLOR-BLACK	FINISH -	PRODUCT SPEC		SIZE A1	GAGE CODE 00779
		108-25034 APPLICATION SPEC			
		114-25026 WEIGHT -			
		CUSTOMER DRAWING			
		DRAWING NO 104500		RESTRICTED TO	-
		SCALE		4:1	SHEET 1 OF 1
				REV	L2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[104500-3](#)