

## Housing - HC-B 16-TFQ-76/O1STM25S - 1645066

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



HEAVYCON B16 sleeve housing, for double locking latch, height: 76 mm, with 1 x M25 thread, lateral cable outlet

RoHS

### Key Commercial Data

|              |                                                                                                         |
|--------------|---------------------------------------------------------------------------------------------------------|
| Packing unit | 10 pc                                                                                                   |
| GTIN         | <br>4 017918 912932 |
| GTIN         | 4017918912932                                                                                           |

### Technical data

#### Dimensions

|        |       |
|--------|-------|
| Height | 76 mm |
| Width  | 43 mm |
| Length | 94 mm |

#### Ambient conditions

|                                      |                   |
|--------------------------------------|-------------------|
| Degree of protection of housing (IP) | IP65              |
| Ambient temperature (operation)      | -40 °C ... 125 °C |

#### General

|                              |                                                        |
|------------------------------|--------------------------------------------------------|
| Note                         | For contact inserts HC-B16, BB32, D40, DD72, HS6, M, K |
| Size                         | B16                                                    |
| Housing type                 | Sleeve housing                                         |
| Locking type                 | for double locking latch                               |
| No. of cable outlets         | 1                                                      |
| Cable outlet                 | lateral                                                |
| Screw connection             | none                                                   |
| Type of the screw connection | 1x M25                                                 |
| Housing material             | Aluminum die-cast                                      |
| Housing surface material     | Powder-coated, gray                                    |

## Housing - HC-B 16-TFQ-76/O1STM25S - 1645066


### Technical data

#### Environmental Product Compliance

|            |                                                                                                     |
|------------|-----------------------------------------------------------------------------------------------------|
| China RoHS | Environmentally Friendly Use Period = 50                                                            |
|            | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |

### Drawings

Dimensional drawing

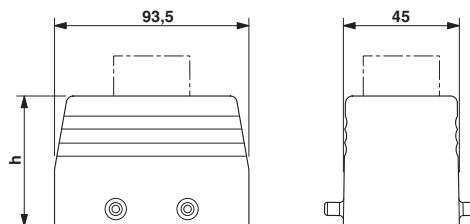

Phoenix Contact 2018 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[1645066](#)