

SPECIFICATIONS CHART							
RATING, B CONTACTS	.4VA MAX @20V MAX. AC OR DC						
	.4VA MAX @20V MAX. AC OR DC OR						
RATING, G CONTACTS-SEE NOTE 3	5A @120 VAC OR 28 VDC (RESISTIVE)						
	2A @250 VAC (RESISTIVE)						
	5A @120 VAC OR 28 VDC (RESISTIVE)						
RATING, Q CONTACTS	2A @250 VAC (RESISTIVE)						
ELECTRICAL LIFE	6,000 CYCLES AT RATED LOAD						
CONTACT RESISTANCE	10 MILLIOHMS MAX INITIAL @ 2-4VDC, 100ma						
INSULATION RESISTANCE	1,000 MEGOHMS MIN						
DIELECTRIC WITHSTANDING VOLTAGE	1,000 V RMS AT SEA LEVEL						
OPERATING TEMPRATURE	-30C TO 85C						

А

С

В

2 REVISIONS DESCRIPTION A7 REVISED PER ECR-16-004460 30MAR2016 RS RH 1 ALL MATERIALS AND FINISHES SHALL COMPLY WITH EU DIRECTIVE 2002/95/EC OF 27JAN2003 (ROHS). EACH SWITCH WITH THREDED BUSHINGS SUPPLIED WITH THE FOLLWING MOUNTING HARDWARE: D (2) HEX NUTS (1) INTERNAL TOOTH LOCKWASHER (1) LOCATING RING.

3 G CONTACT OPTION CAN BE USED FOR SIGNAL OR POWER LEVEL SWITCHING. IF SWITCH IS USED AT LEVELS EXCEEDING .4VA @ 20V AC/DC, SWITCH IS RENDERED FOR POWER SWITCHING ONLY DUE TO ARC REMOVAL OF GOLD PLATING. RATING MARKED ON FRAME IS 2A 250VAC, 5A 120VAC.

DATE CODE AND COUNTRY OF ORIGIN MAY APPEAR ON EITHER SIDE OF SWITCH.

LENGTH OF TOGGLE REDUCED BY .020 WITH A, AV2, V30 OR V40 VERTICAL SUPPORT BRACKET OPTIONS. 6 ALL LOGO, RATING, DATE CODE, AND FUNCTION MARKINGS TO BE LASER MARKED.


		FUNCTION CHART							
		FUNCTIO		ΥΥ 2 3	1	YY 2 3	1	¥ ¥ 2 3	
		01		ON ON		NONE DFF		ON ON	
	TER	08 Minals conn		ON 2-3				(ON) 1-2	
	Of		hanical pos cal positior tary actior	n with	no e	lectrical	con	nection	
		1	rt nume	1					
	MODEL	FUNCTION	TOGGLE	BUSHI		; TERMINA		CONTACT	RoHS
	A1	01	K			CW A		B	04
		08	K1	D D9		AV2		G	_
			L L1	H H		C V30		Q	
			L2	Y		V30 V40			
EXAM	PLE: A1	01SYCQ04	 M	Y9		W			
			P3			W4			
			S			Z			
			T	-		Z3			
			T1						
THIS DRAWING		ROLLED DOCUMENT.	DWN B.S.VISWESWAR CHK M.ZITTO	-		E 1	E	TE Conne	ctivity
INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:	P.BROUILLETTE	- NAI		NI A SERIES			


		СНК –			SIS ''	Connectivi	
DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:	M.ZITTO –	NAME				
INCHES		P.BROUILLETTE	GEMINI A SERIES TOGGLE SWITCH, SINGLE P				E POLE,
\oplus	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	PRODUCT SPEC	_		POSITION FUNCTIONS	•	
\rightarrow \neg	4 PLC \pm - ANGLES \pm 2'	_	SIZE	CAGE CODE	DRAWING NO		RESTRICTED TO
MATERIAL	FINISH	WEIGHT O	A2	00779	C- 1825136		-
_		CUSTOMER DRAWING			scale 3:1	SHEET 1 OF 2	4 ^{REV} A7

С

18251

В

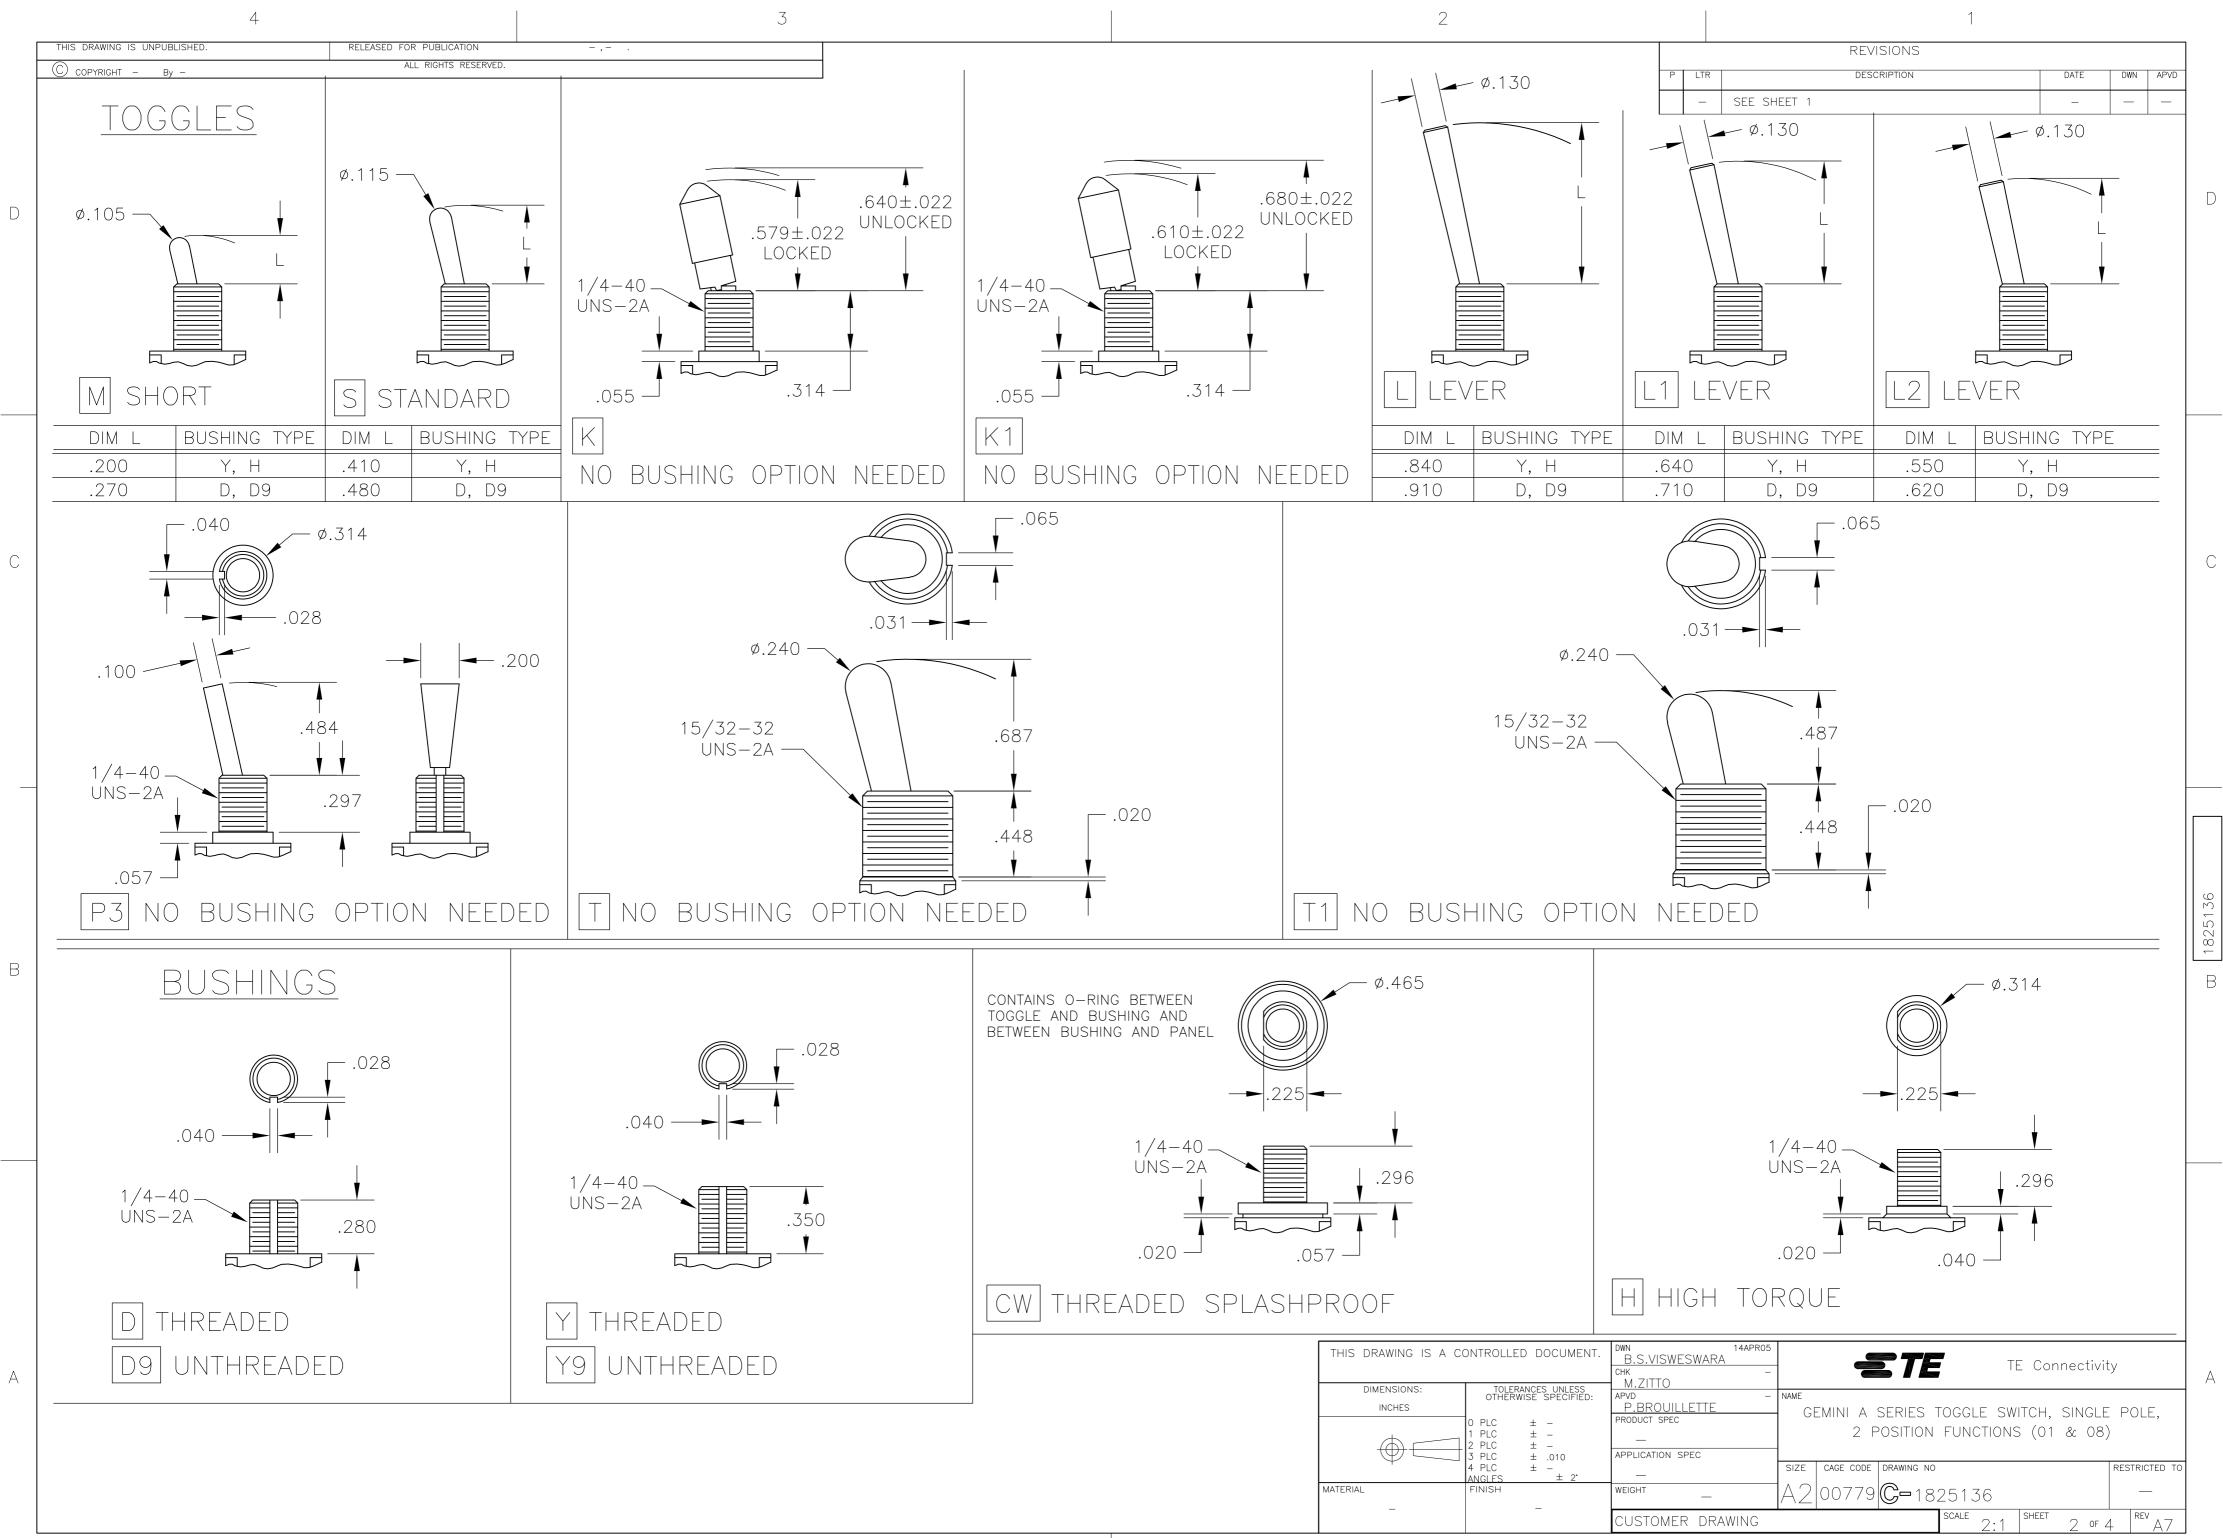

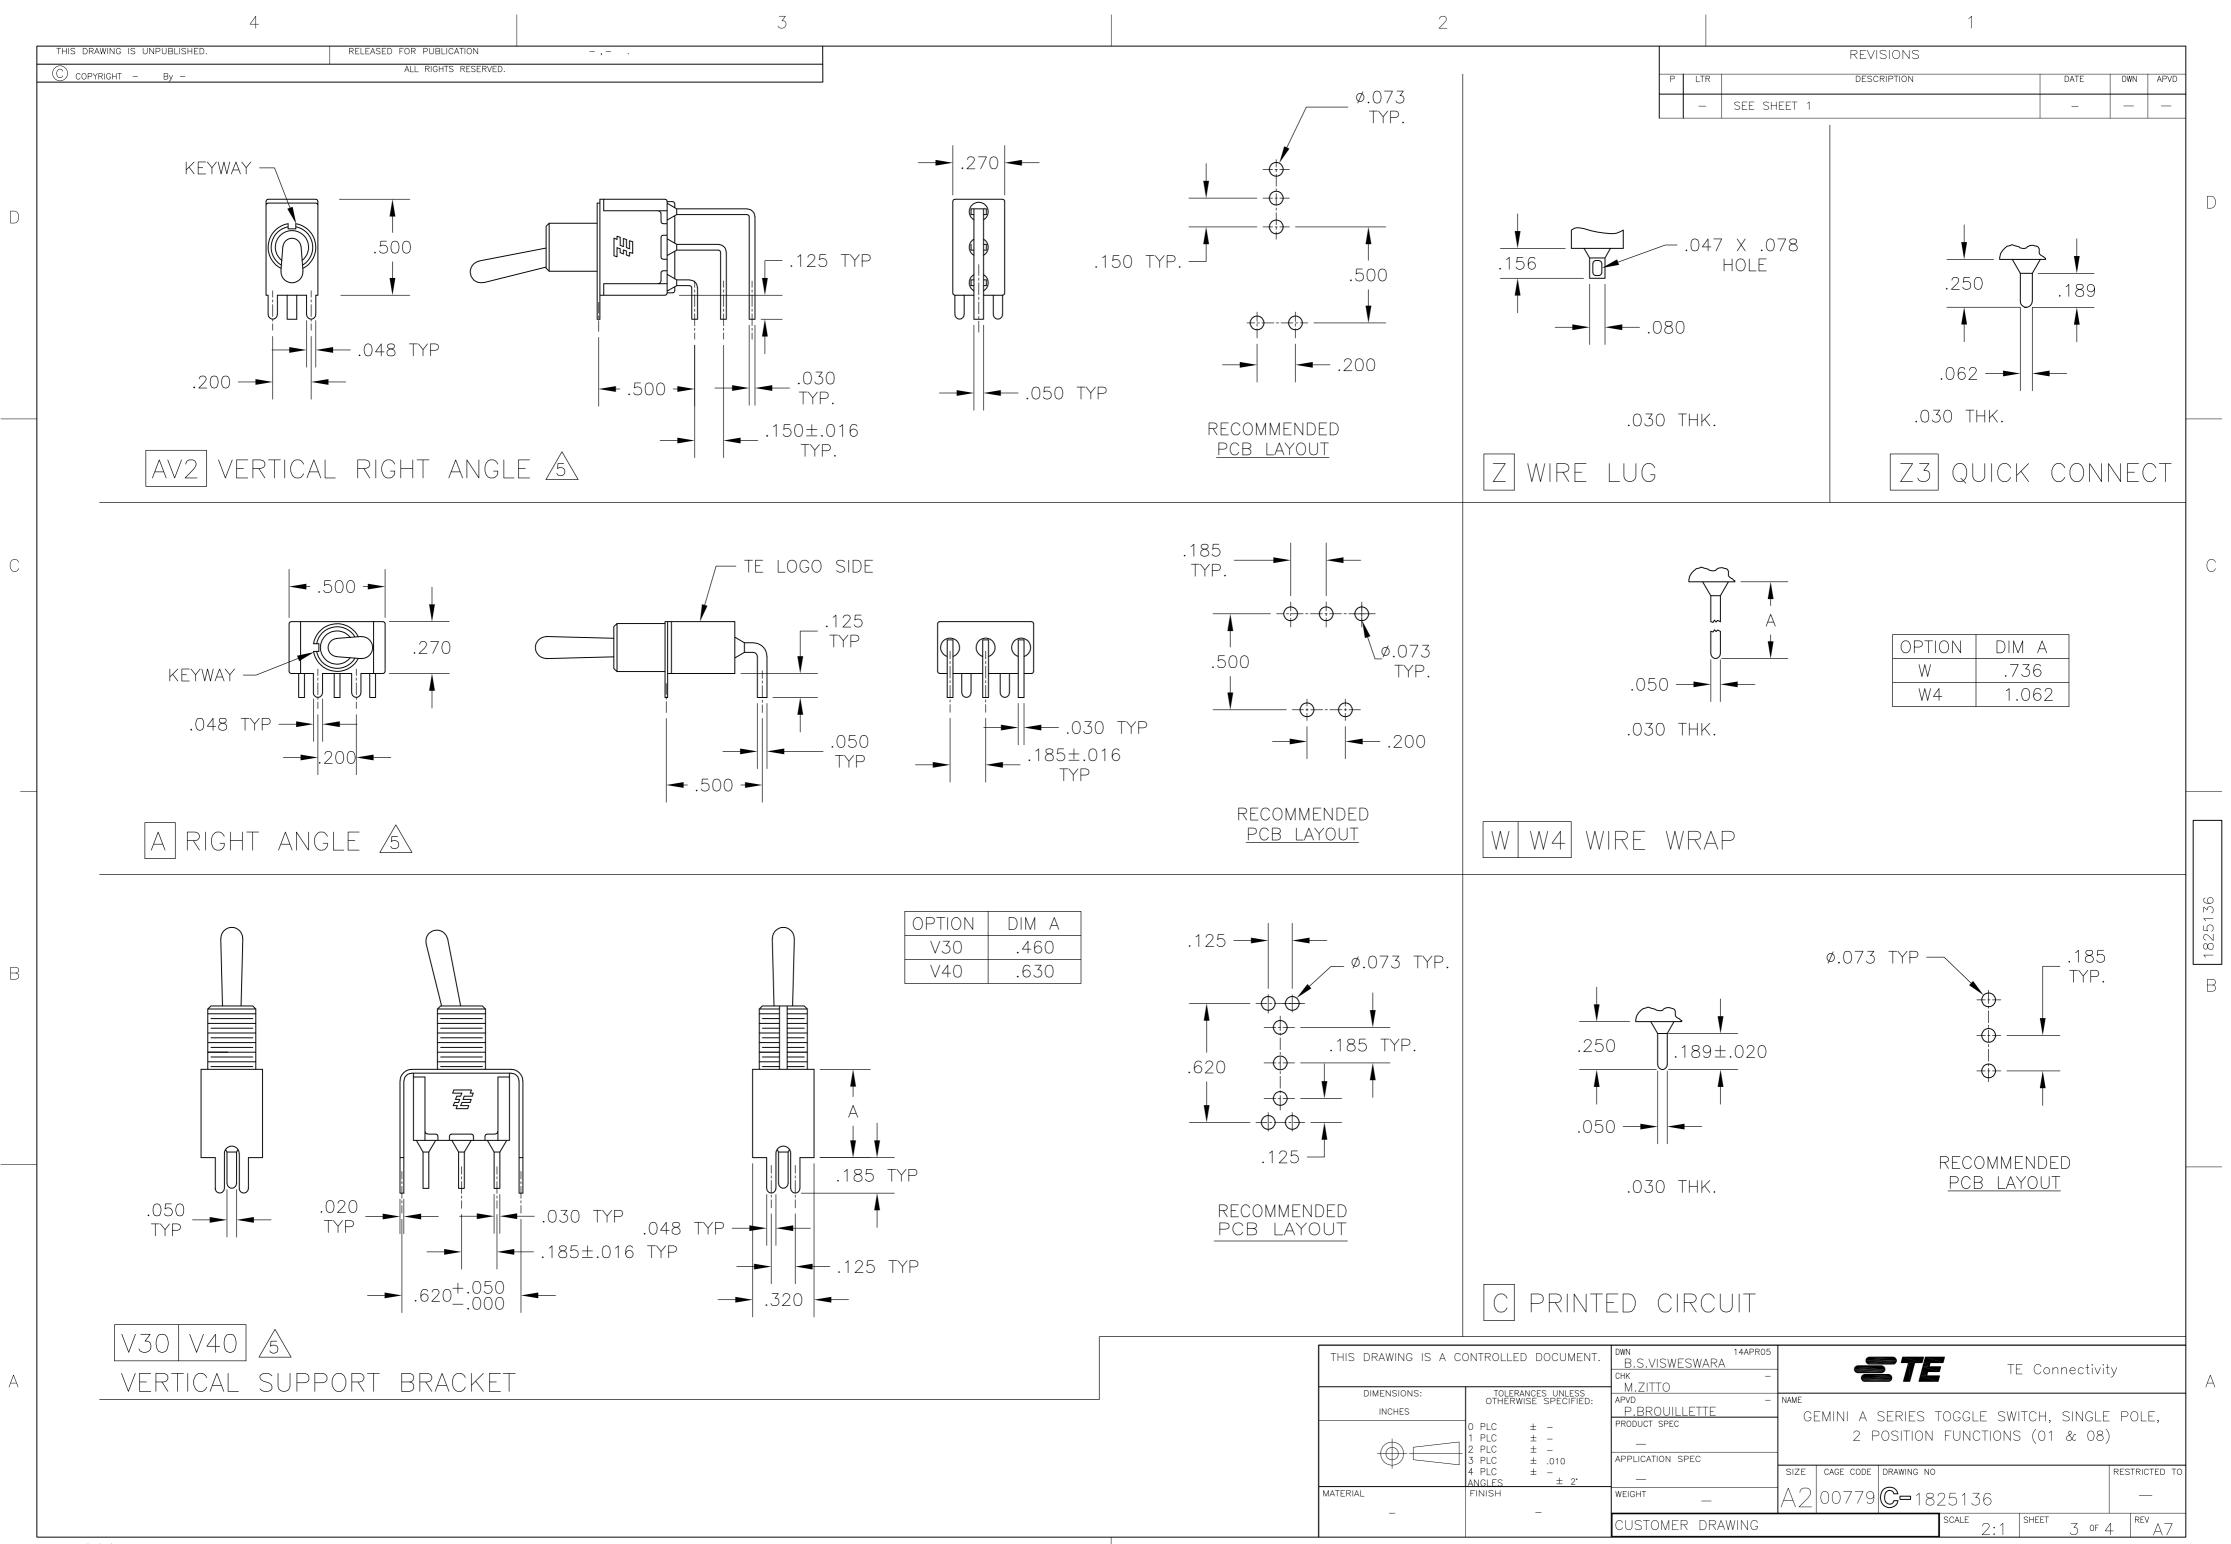

HIS DRAWING IS UN	IPUBLISHED.	RELEASED FOR PUBLICATION	- ,
COPYRIGHT -	By -	ALL RIGHTS RESERVED.	
Γ]
	Alco P/N	P/N	A
	A101K1V30B04	1825136-1	A
_	A101KAB04	1825136-2	n
-	A101KAQ04	1825136-3	n
-	A101P3YV30B04	1825136-4	Α
-	A101KCQ04	1825136-5	A
_	A101KD9AQ04	1825136-6	A
_	A101KZQ04	1825136-7	/
_	A101SYAV2B04	1825136-8	A1
	A101L1D9V30Q04	1825136-9	n
-	A101L1YZB04	1-1825136-0	
	A101LDZQ04	1-1825136-1	A
-	A101MD9AB04	1-1825136-2	A´
	A101MD9AG04	1-1825136-3	A
_	A101MD9AQ04	1-1825136-4	
-	A101MD9AV2B04	1-1825136-5	
-	A101MD9AV2G04	1-1825136-6	
	A101MD9AV2Q04	1-1825136-7	n
-	A101MD9V30B04	1-1825136-8	
	A101MDAQ04	1-1825136-9	
	A101MDAV2B04	2-1825136-0	
	A101MDCG04	2-1825136-1	
	A101MDZQ04	2-1825136-2	
	A101MYCQ04	2-1825136-3	
	A101MYZQ04	2-1825136-4	
	A103SYAV2B04	2-1825136-5	
_	A101P3CB04	2-1825136-6	
_	A101P3ZQ04	2-1825136-7	
_	A101KAV2Q04	2-1825136-8	
_	A101MDCQ04	2-1825136-9	
_	A101SCWCQ004	3-1825136-0	
_	A101SCWZQ04	3-1825136-1	
_	A101SD9AB04	3-1825136-2	
_	A101SD9AQ04	3-1825136-3	-
_	A101SD9AV2B04	3-1825136-4	-
_	A101SD9AV2Q04	3-1825136-5	-
_	A101SD9V30B04	3-1825136-6	
_	A101SD9V30Q04	3-1825136-7	
_	A101SDCQ04	3-1825136-8	
-	A101SDZQ04	3-1825136-9	
-	A101SHZQ04	4-1825136-0	
-	A101SY9CQ04	4-1825136-1	
-	A101SYAB04	4-1825136-2	
-	A101SYAQ04	4-1825136-3	
-	A101SYCB04	4-1825136-4	
-	A101SYCQ04	4-1825136-5	
-	not assigned	4-1825136-6	
-	A101SYWQ04	4-1825136-7	
	A101SYZB04	4-1825136-8	

Alco P/N	P/N
A101SYZQ04	4-1825136-9
not assigned	5-1825136-0
not assigned	5-1825136-1
A101T1ZB04	5-1825136-2
A101T1ZQ04	5-1825136-3
A101TCQ04	5-1825136-4
A101TZQ04	5-1825136-5
A108MD9AB04	5-1825136-6
not assigned	5-1825136-7
A108P3CQ04	5-1825136-8
A108P3ZQ04	5-1825136-9
A108SD9AQ04	6-1825136-0
A108SDZQ04	6-1825136-1
A108SYCB04	6-1825136-2
A108SYCQ04	6-1825136-3
A108SYZQ04	6-1825136-4
not assigned	6-1825136-5
A101SYAG04	6-1825136-6

3

BUSHING SIZE
1/4
15/32

MATERIALS CHART							
COMPONENT NAME	BASE MATERIAL	FINISH					
CASE	DAP, RED, UL94 V-0						
FRAME	STAINLESS STEEL						
B TERMINALS & CONTACTS	COPPER	GOLD OVER NICKEL					
G TERMINALS & CONTACTS	COPPER	GOLD OVER SILVER					
Q TERMINALS & CONTACTS	COPPER	.000400 SILVER					
ACTUATOR	PHENOLIC, BLACK, UL94 V-1						
LEVER	BRASS	CHROME					
BUSHING	BRASS	NICKEL					
SPRING	MUSIC WIRE						
SUPPORT BRACKET	BRASS	TIN					
PIVOT PIN	STEEL	NICKEL					
LOCK WASHER	STAINLESS STEEL						
LOCKING RING	STAINLESS STEEL						
NUTS	C3604BD BRASS	NICKEL					
TERMINAL SEAL	EPOXY						


А

В

D

С

1471-9 (1/15)

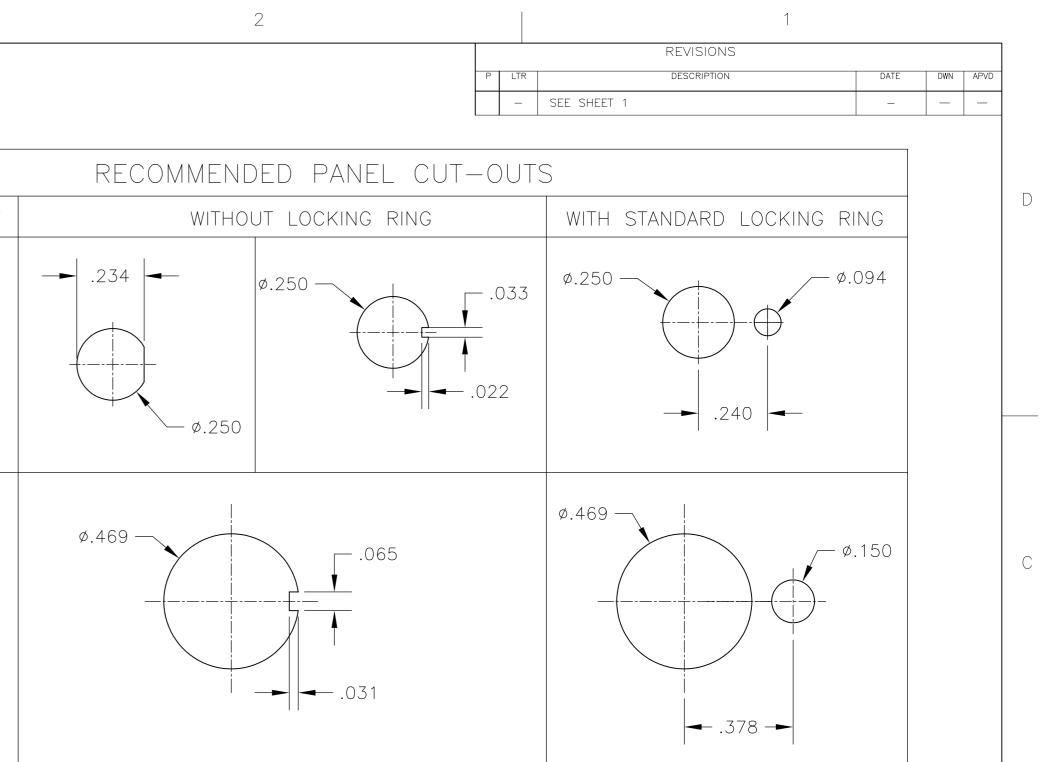

	THIS DRAWING IS A CO	ONTROLLED DOCUMENT.	DWN 14APR05 B.S.VISWESWARA CHK – M.ZITTO			ETE TE CO	onnectivi	ty
		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± .010	APVD - P.BROUILLETTE PRODUCT SPEC APPLICATION SPEC	NAME GEMINI A SERIES TOGGLE SWITCH, SINGLE I 2 POSITION FUNCTIONS (01 & 08)				
,	VATERIAL –	4 PLC ± - ANGLES ± 2" FINISH	– ^{weight} O CUSTOMER DRAWING	size A2	cage code	CP1825136 Scale 3:1	- 4 OF	RESTRICTED TO — 4 REV 4 A7

А

18251

В

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity: A101SYZB04