

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0907790005

Status:

Active

Overview:

Picoflex Ribbon-Cable Connectors

Description:

Picoflex PF-50 Header, Vertical, Low Profile, High Temperature Surface Mount Capable, 12 Circuits, Glow-Wire Capable

Documents:

3D Model

Drawing (PDF)

Product Specification PS-99020-0011-001 (PDF)

Packaging Specification PK-90325-002-001 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification

UL

E29179

General

Product Family

Series

Application

Application Tooling Part Link

Comments

PCB Headers

90779

Signal, Wire-to-Board

69008-1070

""""""This Molex product is manufactured from material that has the following ratings, tested by independent agencies:. a) A Glow Wire Ignition Temperature (GWIT) of at least 775 deg C per IEC 60695-2-13.. b) A Glow Wire Flammability Index (GWFI) above 850 deg C per IEC 60695-2-12.and hence complies with the requirements set out in the International Standard IEC 60335-1 5th edition - household and similar electrical appliances - safety, section 30 Resistance to heat and fire. <P><P> The customers using this product must determine its suitability for use in their particular application through testing or other acceptable means as described in end-product glow-wire flammability test standard IEC 60695-2-11 and any applicable product end-use standard(s). <P> If it is determined during the customer's evaluation of suitability, that higher performance is required, please contact Molex for possible product options. """"""

Overview

Product Name

UPC

Picoflex Ribbon-Cable Connectors

Picoflex

800754317764

Physical

Breakaway

Circuits (Loaded)

Circuits (maximum)

Color - Resin

Durability (mating cycles max)

First Mate / Last Break

Flammability

Glow-Wire Capable

Guide to Mating Part

Keying to Mating Part

Lock to Mating Part

Material - Metal

Material - Plating Mating

Material - Resin

Net Weight

No

12

12

Natural

30

No

94V-0

Yes

No

None


Yes

Brass

Tin

High Temperature Thermoplastic

0.550/g

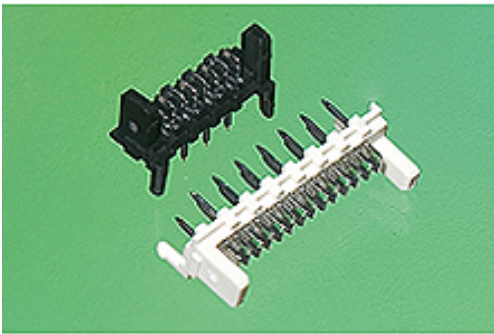

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

China RoHS

Compliant

REACH SVHC

Not Contained Per -

ED/61/2018 (27 June

2018)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

Green Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

Search Parts in this Series

90779 Series

Mates With

90327 IDT Connector

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description

Product #

Extraction Tool

0690081070

(Plastic) for 4-26

Circuit

Number of Rows	1
Orientation	Vertical
PCB Retention	Yes
PCB Thickness - Recommended	1.60mm
Packaging Type	Bag
Pitch - Mating Interface	1.27mm
Pitch - Termination Interface	1.27mm
Plating min - Mating	4.064µm
Plating min - Termination	4.064µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	No
Stackable	No
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-40° to +105°C
Termination Interface: Style	Through Hole
<b>Electrical</b>	
Current - Maximum per Contact	1.2A
Voltage - Maximum	250V
<b>Solder Process Data</b>	
Lead-freeProcess Capability	WAVE
<b>Material Info</b>	
<b>Reference - Drawing Numbers</b>	
Packaging Specification	PK-90325-002-001
Product Specification	PS-99020-0011-001
Sales Drawing	SDA-90779

This document was generated on 10/10/2018

PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

90779-0005