
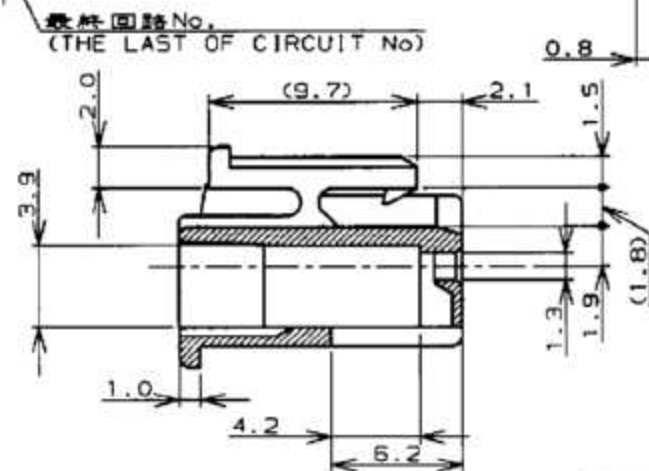
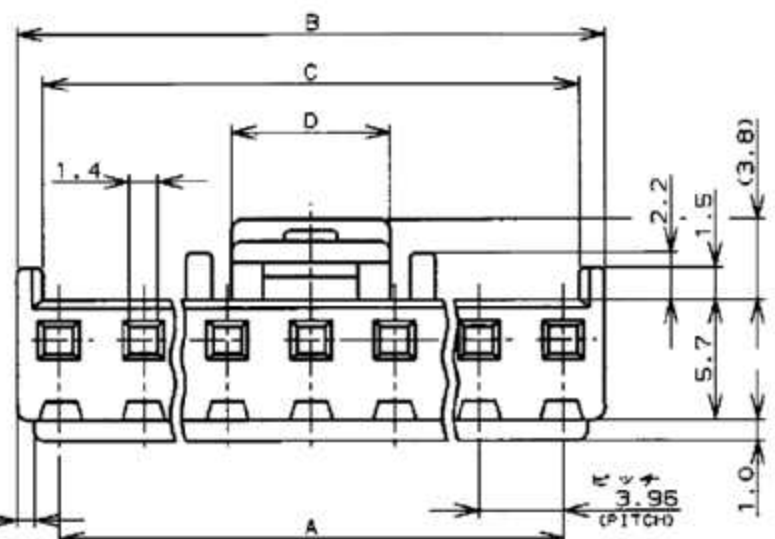
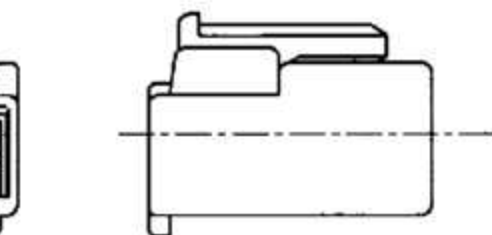


RELEASED FOR PUBLICATION


注記：

- NOTES:

1. APPLICABLE CONTACT P/N : 0-1123721-1
2. MATING CONN P/N: []-1123723-[]
[]-1123724-[]
3. 7-1123722-[] MEET GWT(GLOW WIRE TEST)
750 DEGREE SPEC

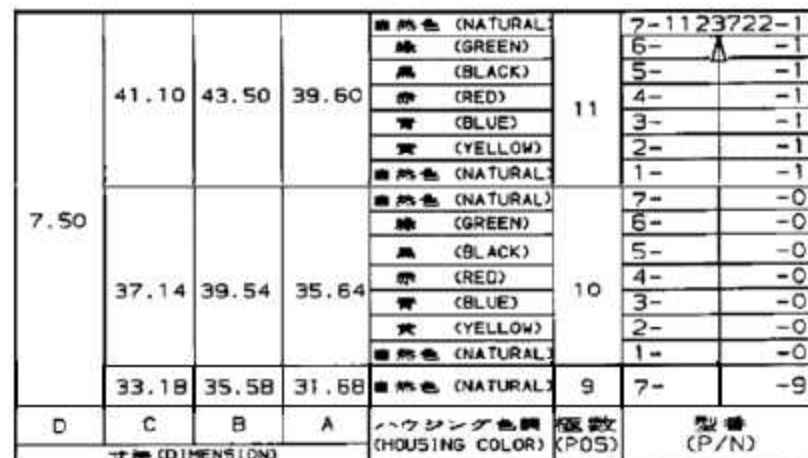

断面 A
SECT A

<p>DIMENSIONS:</p> <p>単位: mm</p>		<p>TOLERANCES UNLESS OTHERWISE SPECIFIED</p>	
		<p>一般公差</p> <p>±0.3</p> <p>>1: 10.4</p>	
<p>MATERIAL</p> <p>材料</p> <p>66ナイロン UL94V-0</p> <p>(66NYLON UL94V-0)</p>		<p>FINISH</p> <p>仕上</p> <p>— //</p>	

OWN 24 JUN '98 N. YAMASAKI		 TE Connectivity	
CHK 24 JUN '98 M. SHINDO			
APVD 24 JUN '98 M. SHINDO		NAME 名称	
PRODUCT SPEC 製品規格 108-5609		3.96mm PITCH ECONOMY POWER(EP)CONN. PLUG H5G 3.96mm ピッチエコノミーパワー(EP)コネクタ プラグハウジング	
APPLICATION SPEC 取付適用規格 —H—		RESTRICTED TO	
WEIGHT —H—		SIZE A3	CAGE CODE 00779
CUSTOMER DRAWING		DRAWING NO. 番号 C= 1123722	
SCALE 尺数 —H—		SHEET OP 1 REV D1	

参考図面

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[7-1123722-1](#)