


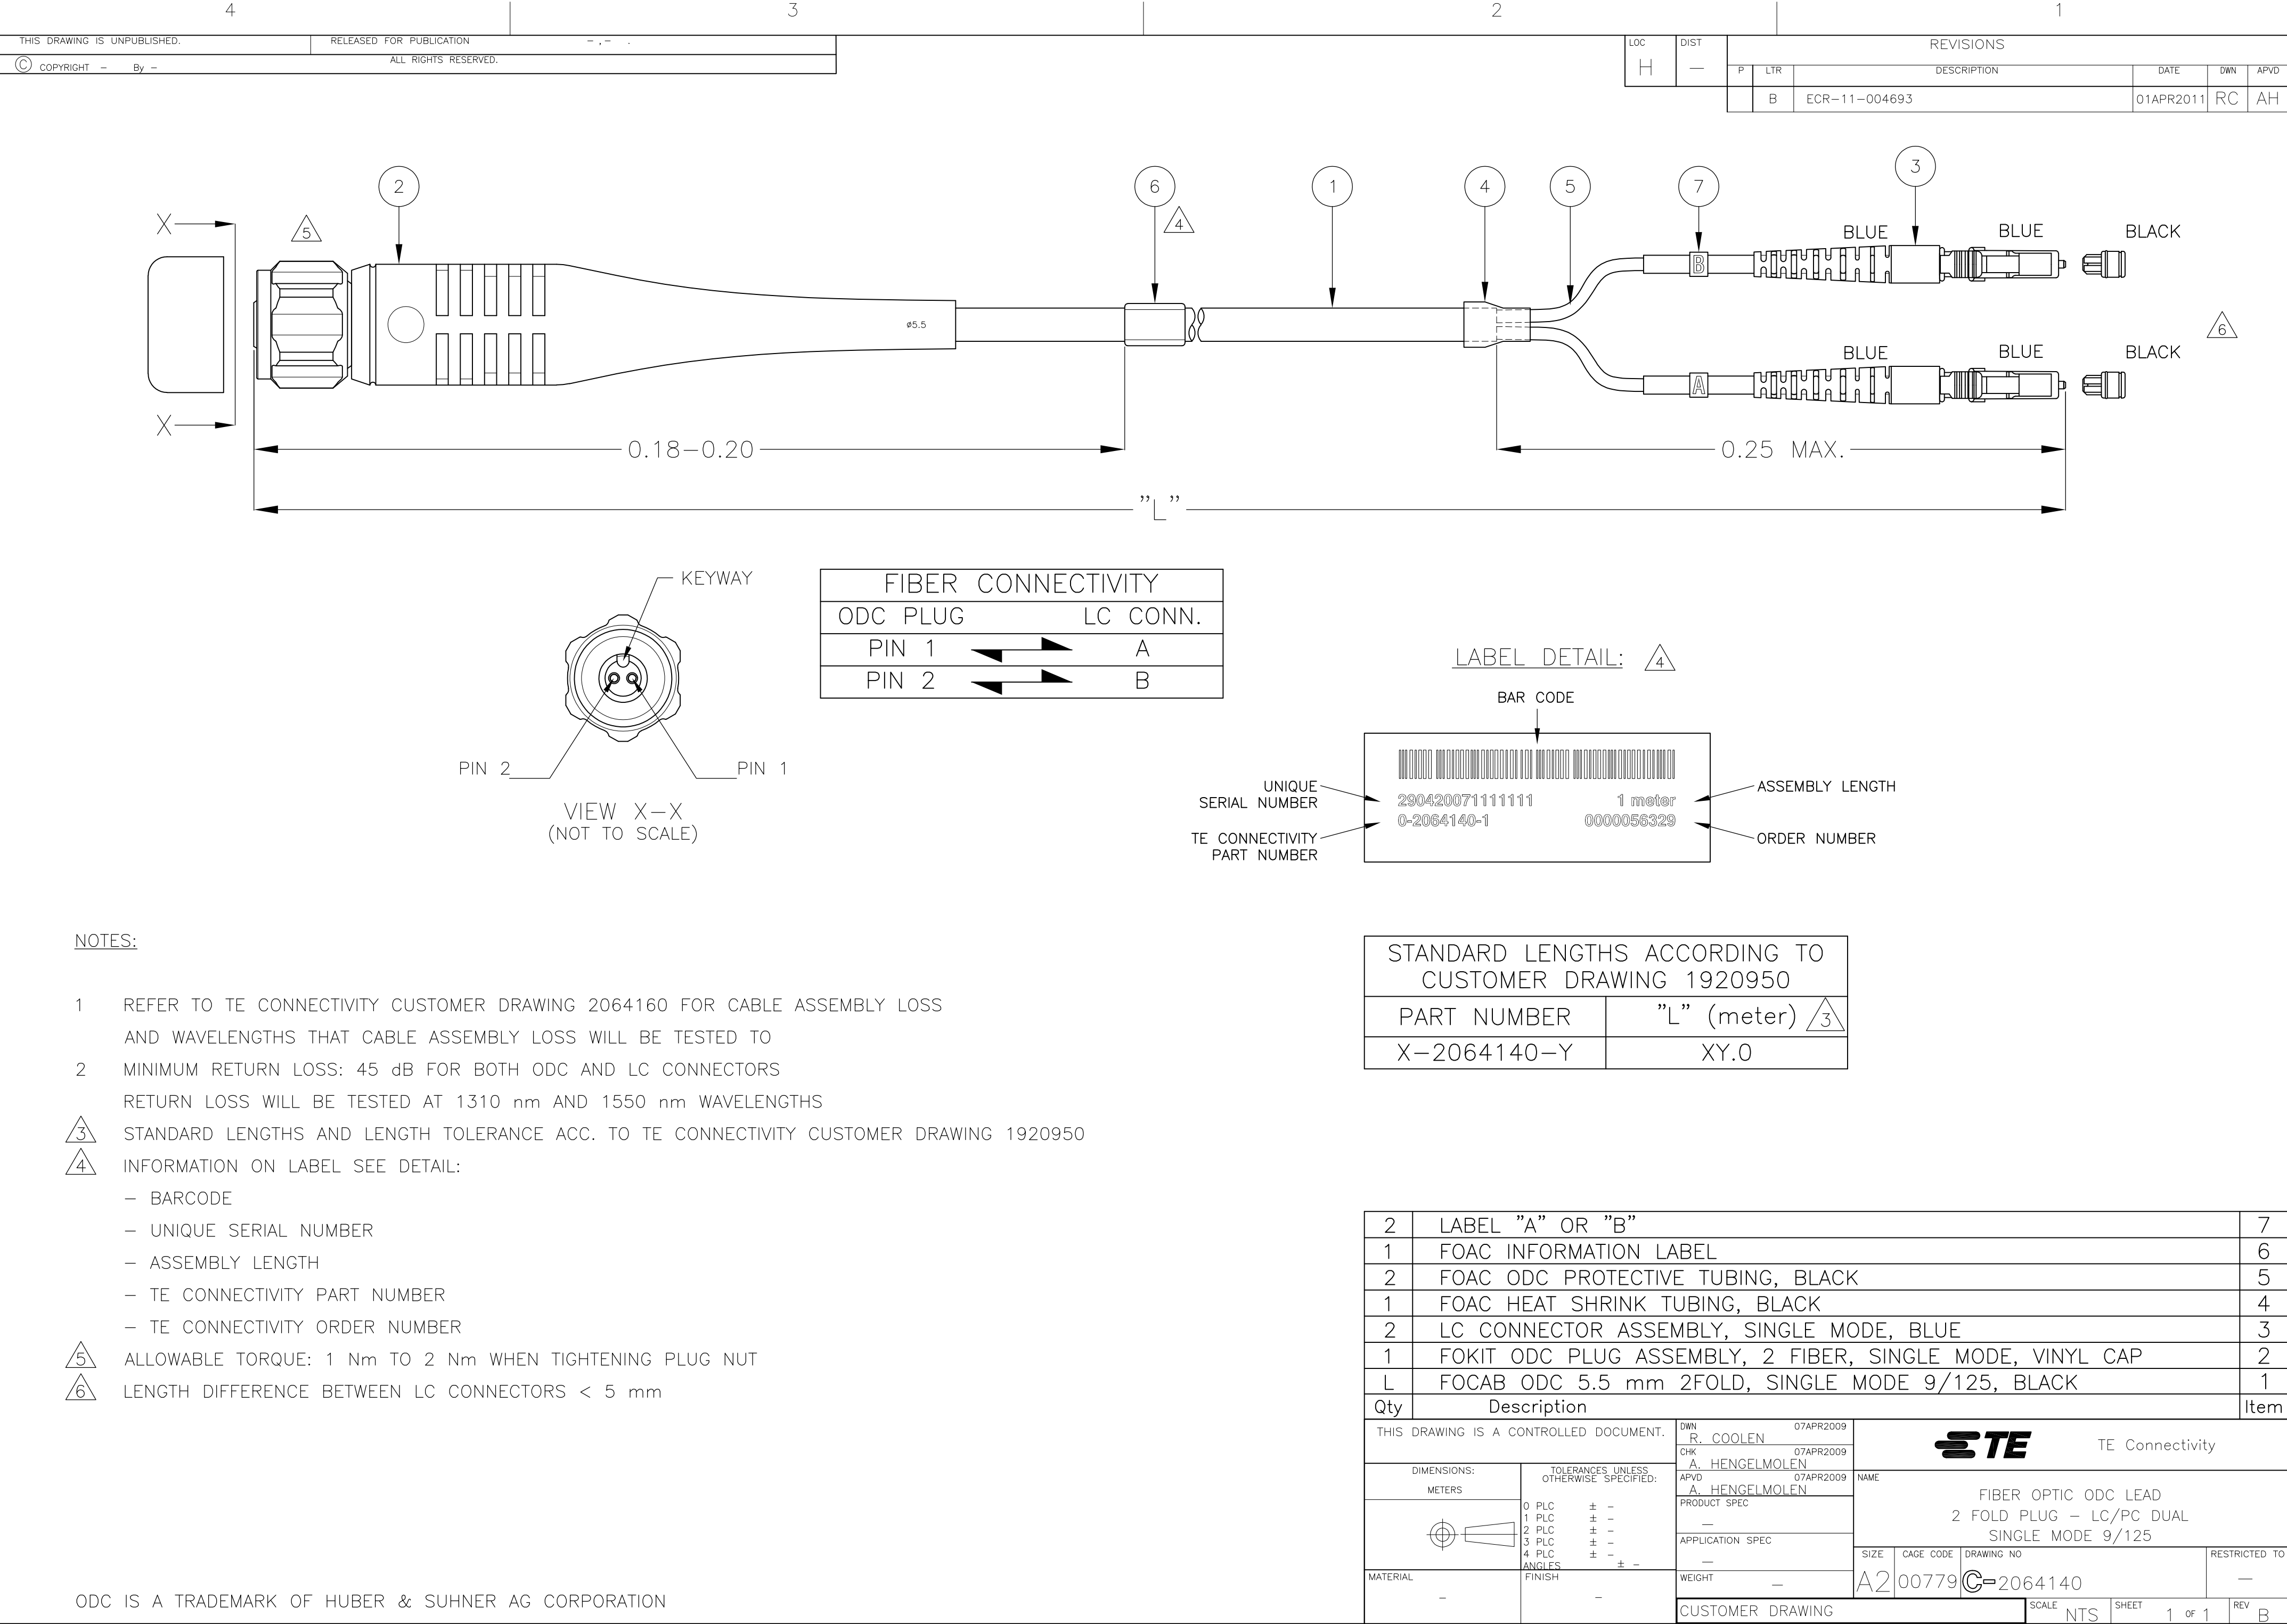

2

6

1

4

5

7

3

5

4

6

Ø5.5

0.18-0.20

0.25 MAX.

X

X

VIEW X-X
(NOT TO SCALE)

KEYWAY

PIN 2

PIN 1

FIBER CONNECTIVITY	
ODC PLUG	LC CONN.
PIN 1	A
PIN 2	B

LABEL DETAIL: 4

BAR CODE

UNIQUE SERIAL NUMBER

290420071111111

0-2064140-1

ASSEMBLY LENGTH

1 meter

0000056329

TE CONNECTIVITY PART NUMBER

ORDER NUMBER

NOTES:

1

REFER TO TE CONNECTIVITY CUSTOMER DRAWING 2064160 FOR CABLE ASSEMBLY LOSS AND WAVELENGTHS THAT CABLE ASSEMBLY LOSS WILL BE TESTED TO

2

MINIMUM RETURN LOSS: 45 dB FOR BOTH ODC AND LC CONNECTORS

RETURN LOSS WILL BE TESTED AT 1310 nm AND 1550 nm WAVELENGTHS

3

STANDARD LENGTHS AND LENGTH TOLERANCE ACC. TO TE CONNECTIVITY CUSTOMER DRAWING 1920950

4

INFORMATION ON LABEL SEE DETAIL:

- BARCODE

- UNIQUE SERIAL NUMBER

- ASSEMBLY LENGTH

- TE CONNECTIVITY PART NUMBER

- TE CONNECTIVITY ORDER NUMBER

5

ALLOWABLE TORQUE: 1 Nm TO 2 Nm WHEN TIGHTENING PLUG NUT

6

LENGTH DIFFERENCE BETWEEN LC CONNECTORS < 5 mm

2	2	7
1	1	6
2	2	5
1	1	4
2	2	3
1	1	2
L	1	1
Qty	Description	Item
	THIS DRAWING IS A CONTROLLED DOCUMENT.	
	DIMENSIONS: METERS	
	TOLERANCES UNLESS OTHERWISE SPECIFIED:	
	MATERIAL	
	FINISH	
	WEIGHT	
	CUSTOMER DRAWING	

DWN

R. COOLEN

07APR2009

CHK

A. HENGELMOLEN

07APR2009

APVD

A. HENGELMOLEN

07APR2009

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

SCALE

NTS

SHEET

1 of 1

REV

B

TE Connectivity

FIBER OPTIC ODC LEAD

2 FOLD PLUG - LC/PC DUAL

SINGLE MODE 9/125

SIZE

A2

CAGE CODE

00779

DRAWING NO

C=2064140

RESTRICTED TO

1471-9 (3/11)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[4-2064140-9](#)