
4

 \square

В

А

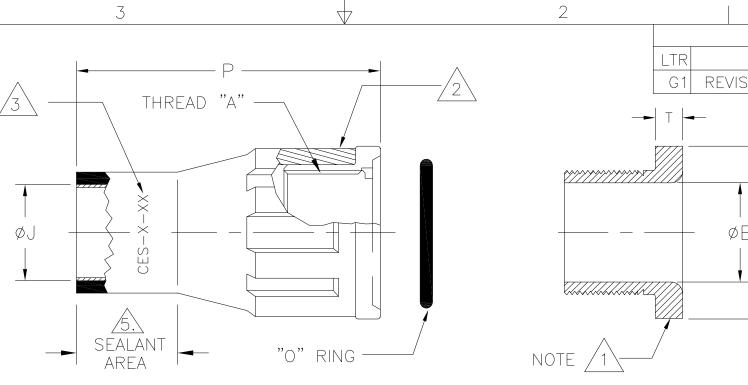

PART		øВ	ØC	ØJ		P	т
DESCRIPTION	"A" THREAD	±.02	REF	MIN EXP	MAX REC	REF REC	REF
CES-1-XX	1-12 UNF	.75 [19,05]	1.40 [35,56]	.50 [12,7]	.16 [4,07]	2.45 [62,23]	.21 [5,34
CES-2-XX	1-12 UNF	.75 [19,05]	1.40 [35,56]	.75 [19,05]	.25 [6,35]	2.45 [62,23]	.21 [5,34
CES-3-XX	1 3/8-12 UNF	1.10 [27,94]	1.90 [48,26]	1.20 [30,48]	.50 [12,7]	3.55 [90,17]	.31 [7,88
CES-4-XX	2-8 UN	1.56 [39,62]	2.70 [68,58]	1.60 [40,64]	.75 [19,05]	3.85 [97,79]	.31 [7,88
CES-5-XX	3 3/8-8 UN	2.90 [73,66]	4.10 [104,14]	2.75 [70,48]	1.38 [35,06]	7.50 [190,50]	.31 [7,88

4

NOTES:

1. The last two "x's" in the part number designate material as shown below:

"AL": ALUMINUM 6061-T6 WITH FINISH OF HARD ANODIZE PER MIL-A-8625F, TYPE III, CLASS 2, DYED BLACK. "SS": STAINLESS STEEL TYPE 316, WITH FINISH OF PASSIVATE PER ASTM-A967.

3

FOR STANDARD BLACK NYLON MATERIAL, OMIT THE LAST TWO "X's" IN THE PART NO.

2 Heat shrinkable boot material in accordance with -3 polyolefin

3. PART TO BE MARKED AS SHOWN, REPLACE "X's" WITH APPROPRIATE CHARACTERS (e.g. CES-3-AL).

4. THIS PART IS DESIGNED TO FIT THROUGH A PANEL OR BULKHEAD WITH A MAXIMUM WALL THICKNESS AS INDICATED IN TABLE.

5. FACTORY APPLIED HOT MELT ADHESIVE IS STANDARD.

REVISED DATE UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE INCHES. METRIC 10/27/2008 UNGUYEN DIMENSIONS ARE IN BRACKETS. RPN DECIMAL TOLERANCES .XXX ± 0.005 [0.13 mm] [0.25 mm] N/A .XX ± 0.01 .X ± 0.1 [0.50 mm] ANGLE TOLERANCE .X ± 1 DEG. THIRD ANGLE PROJECTION TE CONNECTIVITY RESERVES THE RIGHT TO AMEND THIS DRAWING AT ANY TIME. USERS SHOULD EVALUATE THE SUITABILITY OF THE RODUCT FOR THEIR APPLICATION © 2003,2011Tyco Electronics Corporation, a TE connectivity Ltd.company. All rights reserved 2

4

	1 REVISIONS	7
	DESCRIPTION DATE	_
-VIS	SED PER ECO-11-005139 29MAR11	_
Ø		
T RE .2	F 4	С
5,	1 1/4 34] [6,35]	
2 5,	1 1/4 34] [6,35]	
.3 7,8 .3 7,8	$ \begin{array}{cccccccccccccccccccccccccccccccccccc$	B
	THIS DOCUMENT IS PRINTED IT BECOMES UNCONTROLLED. TAK FOR THE LATEST REVISION.	
800	TE ConnectivityRaychem Molded Parts 305 Constitution Dr Menlo Park, CA 94025	A
	TITLE CABLE ENTRY SEALS STANDARD	
P	SIZE CODE IDENT. NO. DWG. NO. CES-X-XX	
i.	DO NOT SCALE THIS DRAWING SHEET 1 OF 1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:CES-3CES-2A100CES-3-D1