

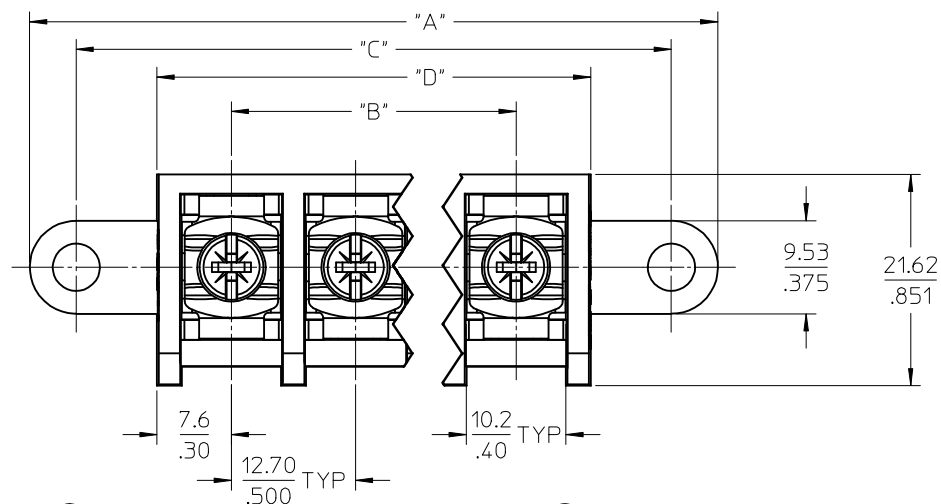


10	9	8	7	6	5	4	3	2
----	---	---	---	---	---	---	---	---

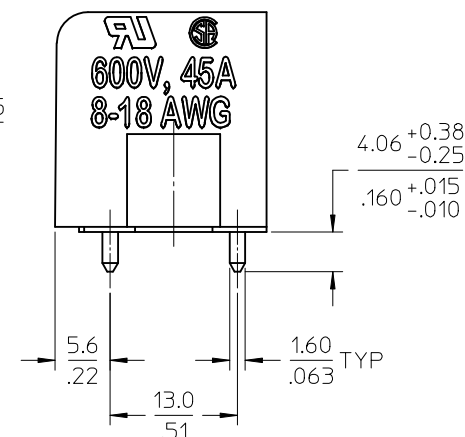

A diagram of a 5-position rotary switch. The switch has five positions, each with a different internal contact configuration. The positions are labeled with numbers 1 through 5. The switch is shown in a perspective view, with a 5-pin connector on the right side.

Top view of the BEAU 66 sign. The sign is rectangular with rounded corners and a central rectangular cutout. It is mounted on two posts. The dimensions are 0.51 inches in height and 0.020 inches in thickness.

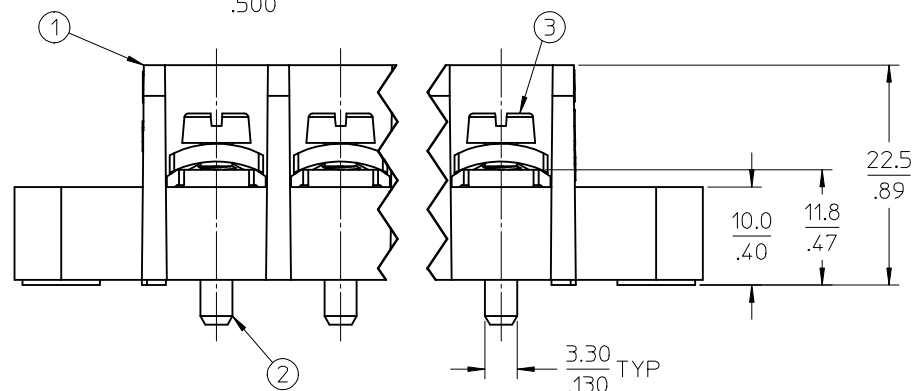

1. MATERIAL: SEE TABLE
2. FINISHES: SEE TABLE
3. "XX" REFERS TO THE NUMBER OF CIRCUIT POSITIONS.
4. ASSEMBLY IS ROHS COMPLIANT.

INITIAL RELEASE EC NO: WNA2009-0247 OFWNL:CLYORK 2009/10/27 CHK'D:RDEROSS 2009/10/27 APPR:DTITUS 2009/10/27	DESCRIPTION	QUALITY SYMBOLS ▼=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE 2:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION			
				mm	INCH	DRAWN BY C. YORK	DATE 2008/10/13	TITLE SR BTS, 12.70/500 PITCH PC W/MTG ASSY, ROHS COMPLIANT				
			4 PLACES	± ---	± ---	CHECKED BY R. DEROSS	DATE 2008/10/13					
			3 PLACES	± ---	± .005							
			2 PLACES	± 0.13	± .01	APPROVED BY DTITUS	DATE 2009/10/27	MOLEX MOLEX INCORPORATED				
1 PLACE	± 0.3	± ---										
		ANGULAR ± 2 °		MATERIAL NO.		DOCUMENT NO.		SHEET NO.				
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				SEE SHT. 2		SD-38660-004		1 OF 2				
A	REV	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										

NO. OF CIRCUITS	DIM. "A"		DIM. "B"		DIM. "C"		DIM. "D"		ASSEMBLY MATERIAL NO.
	mm	in	mm	in	mm	in	mm	in	
02	54.1	2.13	12.70	.500	44.45	1.750	27.9	1.10	386608602
03	66.8	2.63	25.40	1.000	57.15	2.250	40.6	1.60	386608603
04	79.5	3.13	38.10	1.500	69.85	2.750	53.3	2.10	386608604
05	92.2	3.63	50.80	2.000	82.55	3.250	66.0	2.60	386608605
06	104.9	4.13	63.50	2.500	95.25	3.750	78.7	3.10	386608606
07	117.6	4.63	76.20	3.000	107.95	4.250	91.4	3.60	386608607
08	130.3	5.13	88.90	3.500	120.65	4.750	104.1	4.10	386608608
09	143.0	5.63	101.60	4.000	133.35	5.250	116.8	4.60	386608609
10	155.7	6.13	114.30	4.500	146.05	5.750	129.5	5.10	386608610
11	168.4	6.63	127.00	5.000	158.75	6.250	142.2	5.60	386608611
12	181.1	7.13	139.70	5.500	171.45	6.750	154.9	6.10	386608612
13	193.8	7.63	152.40	6.000	184.15	7.250	167.6	6.60	386608613

SEE SHEET ONE

EC NO: WNA2009-0247

DRWN:CLYORK 2009/10/27

CHKD:RDEROSS 2009/10/27

APPR:DTITUS 2009/10/27

A

QUALITY SYMBOLS

=0

=0

DESCRIPTION

REV

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± .005
2 PLACES	± 0.13	± .01
1 PLACE	± 0.3	± ---
ANGULAR ± 2 °		

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE

MM/IN

DRAWN BY	DATE
C. YORK	2008/10/13
CHECKED BY	DATE
R. DEROSS	2008/10/13
APPROVED BY	DATE
DTITUS	2009/10/27

MATERIAL NO.

SEE CHART

SIZE

B

SCALE

2:1

DESIGN UNITS

INCH

THIRD ANGLE PROJECTION

TITLE

SR BTS, 12.70/.500 PITCH
PC W/MTG ASSY, ROHS
COMPLIANT

MOLEX INCORPORATED

DOCUMENT NO.

SD-38660-004

SHEET NO.

2 OF 2

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[38660-8605](#)