




| LOC | DIST | REVISIONS |     |                           |           |     |
|-----|------|-----------|-----|---------------------------|-----------|-----|
| BD  | 95   | P         | LTR | DESCRIPTION               | DATE      | OWN |
|     |      |           | B   | REVISED PER ECO-14-018700 | 17DEC2014 | AP  |

D


C

B

A

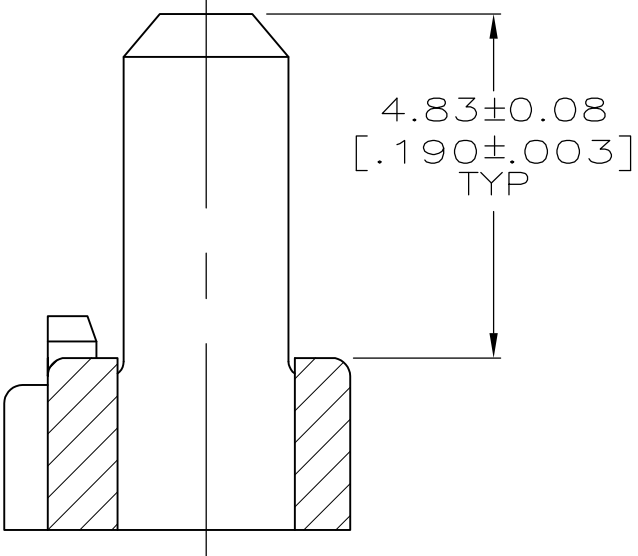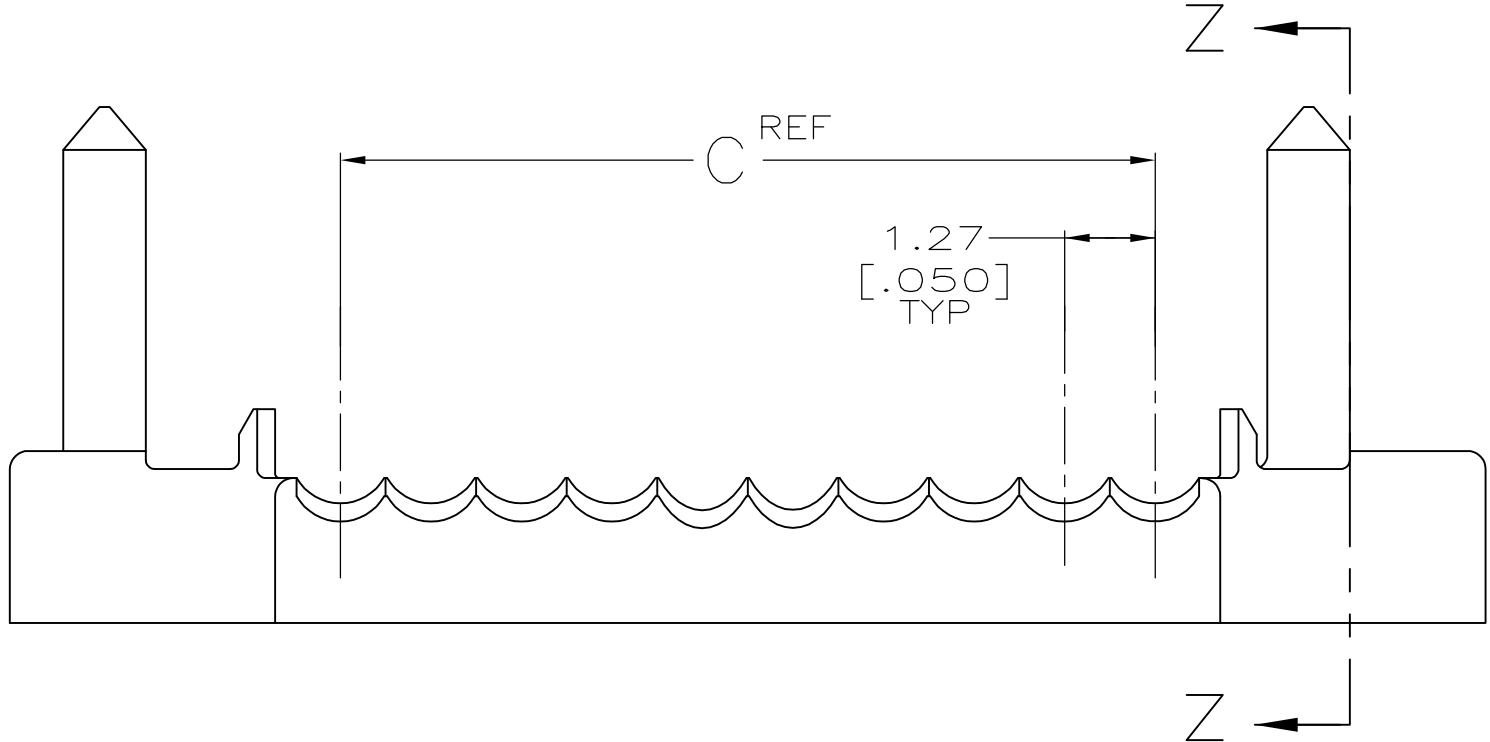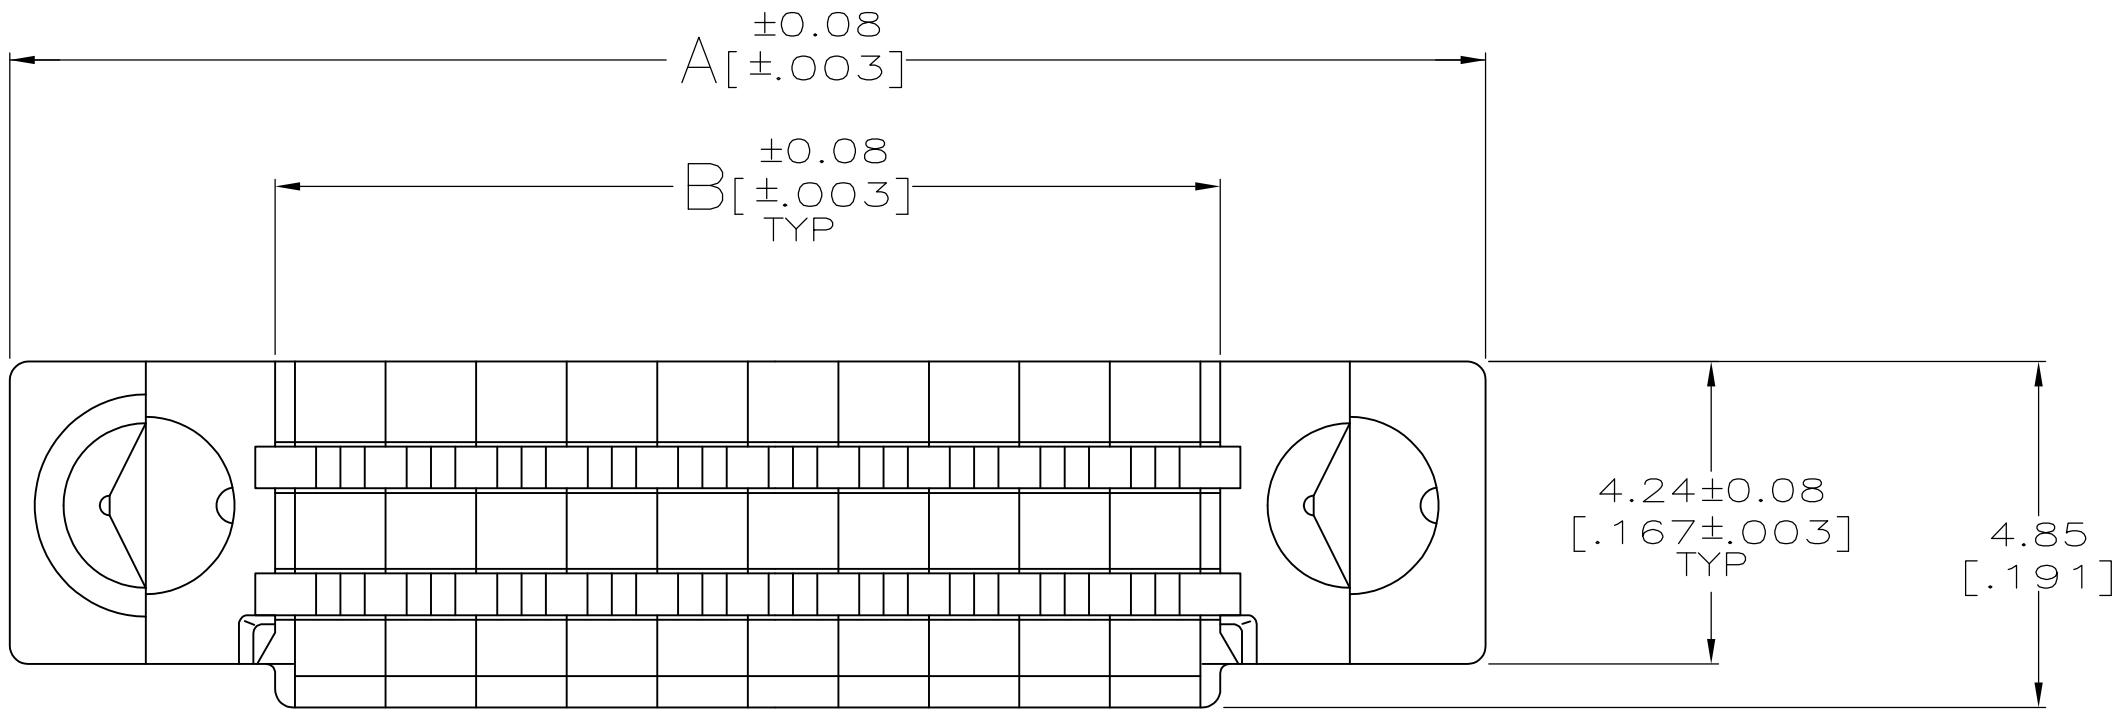

SECTION Z-Z

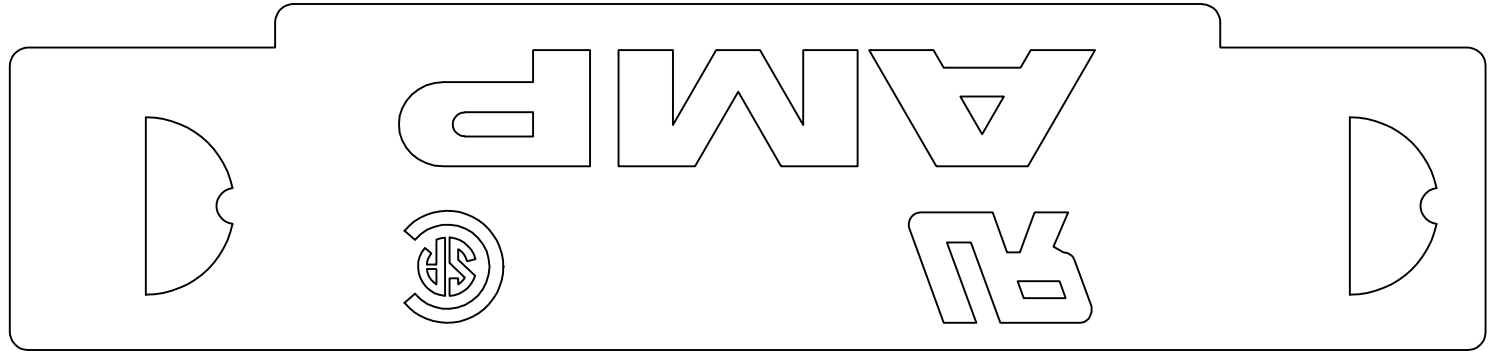

- 1 POLYESTER, UL 94V-0 RATED, BLACK.
- 2 RECOMMENED WIRE: 28 OR 30 AWG SOLID OR 7 STRAIN, 0.74- 0.91 [ $0.029-0.036$ ] INSULATION DIAMETER. WIRE MUST BE APPROVED BY TE INC.
- 3 TWO COVERS REQUIRED PER CONNECTOR ASSEMBLY.

OBSOLETE

|                  |                  |                  |               |                |
|------------------|------------------|------------------|---------------|----------------|
| 21.59<br>[.850]  | 23.42<br>[.922]  | 30.86<br>[1.215] | 36            | 1-749108-1     |
| 15.24<br>[.600]  | 17.07<br>[.672]  | 24.51<br>[.965]  | 26            | 1-749108-0     |
| 74.93<br>[2.950] | 76.76<br>[3.022] | 84.20<br>[3.315] | 120           | 749108-9       |
| 62.23<br>[2.450] | 64.06<br>[2.522] | 71.50<br>[2.815] | 100           | 749108-8       |
| 49.53<br>[1.950] | 51.36<br>[2.022] | 58.80<br>[2.315] | 80            | 749108-7       |
| 41.91<br>[1.650] | 43.74<br>[1.722] | 51.18<br>[2.015] | 68            | 749108-6       |
| 36.83<br>[1.450] | 38.66<br>[1.522] | 46.10<br>[1.815] | 60            | 749108-5       |
| 30.48<br>[1.200] | 32.31<br>[1.272] | 39.75<br>[1.565] | 50            | 749108-4       |
| 24.13<br>[.950]  | 25.96<br>[1.022] | 33.40<br>[1.315] | 40            | 749108-3       |
| 16.51<br>[.650]  | 18.34<br>[.722]  | 25.78<br>[1.015] | 28            | 749108-2       |
| 11.43<br>[.450]  | 13.26<br>[.522]  | 20.70<br>[.815]  | 20            | 749108-1       |
| C                | B                | A                | NO OF<br>POSN | PART<br>NUMBER |

|                                           |  |                                |                                                      |                        |
|-------------------------------------------|--|--------------------------------|------------------------------------------------------|------------------------|
| THIS DRAWING IS A CONTROLLED DOCUMENT.    |  | DWN<br>C.OBERMAN<br>10/19/93   | TE Connectivity                                      |                        |
|                                           |  | CHK<br>R.STONE<br>10-19-93     |                                                      |                        |
| DIMENSIONS:<br>mm[INCHES]                 |  | APVD<br>R.MIKLINSKI<br>12-6-93 | NAME<br>TERMINATING COVER,<br>AMPLIMITE™ .050 SERIES |                        |
| TOLERANCES UNLESS<br>OTHERWISE SPECIFIED: |  | PRODUCT SPEC<br>108-1228       | SIZE<br>A2                                           |                        |
| MATERIAL<br>                              |  | APPLICATION SPEC<br>114-40029  | CAGE CODE<br>00779                                   | DRAWING NO<br>G-749108 |
| FINISH<br>-                               |  | WEIGHT<br>-                    | RESTRICTED TO<br>-                                   |                        |
| CUSTOMER DRAWING                          |  |                                | SCALE<br>10:1                                        | SHEET<br>1 of 1        |
|                                           |  |                                | REV<br>B                                             |                        |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[749108-2](#)