

PHYSICAL PROPERTIES:
HOUSING MATERIAL: THERMOPLASTIC, PC
FLAMABILITY: UL94V-0
COLOR: BLACK

TERMINAL:
TERMINALS: BRASS, TIN PLATED
SCREWS: 6-32 STEEL, NICKEL PLATED

MECHANICAL:
PITCH: .437
WIRE RANGE: 14-22 AWG
RECOMMENDED TIGHTENING TORQUE: 12IN-LB

ELECTRICAL PROPERTIES:
MAX CURRENT: 25A
OPERATING VOLTAGE: 300V

ENVIRONMENTAL PROPERTIES:
OPERATING TEMP: -40°C TO 120°C

- 1


SEE FIGURE.
- 2

PRELIMINARY PART NUMBER.
- 3


STAINLESS STEEL SCREWS.
- 4

WHITE INK STAMP.
- 5

TE CONNECTIVITY LOGO LOCATED APPROXIMATE AREA.

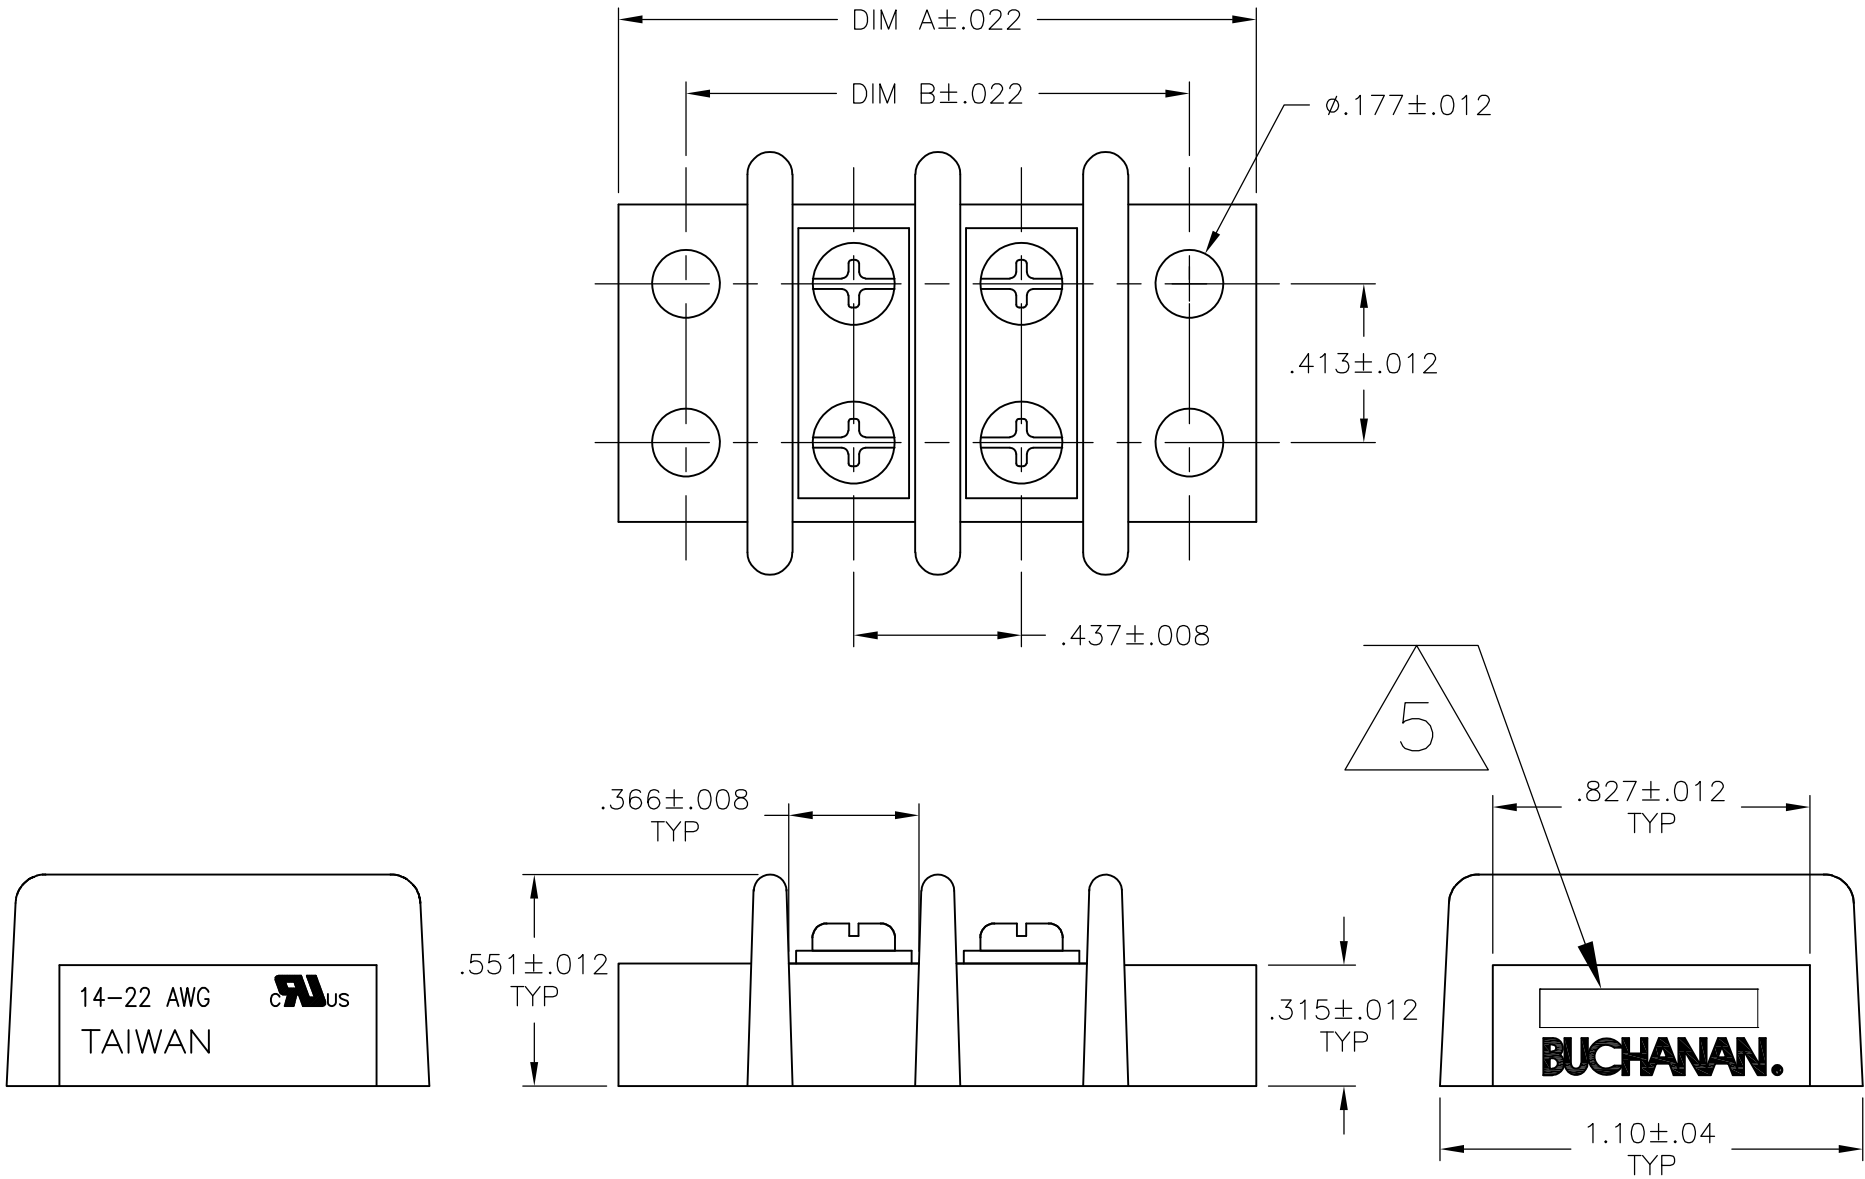


	5.646	5.992	12	4-1546670-2
	9.142	9.488	20	2-1546670-0
	8.705	9.051	19	1-1546670-9
2	8.268	8.614	18	3-1546670-0
	8.268	8.614	18	1-1546670-8
	7.831	8.177	17	1-1546670-7
	7.394	7.740	16	1-1546670-6
	6.957	7.303	15	1-1546670-5
	6.520	6.866	14	1-1546670-4
	6.083	6.429	13	1-1546670-3
	5.646	5.992	12	1-1546670-2
	5.209	5.555	11	1-1546670-1
4 2 1	4.772	5.118	10	4-1546670-3
2 1	4.772	5.118	10	3-1546670-8
	4.772	5.118	10	1-1546670-0
2 1	4.335	4.681	9	3-1546670-5
2 1	4.335	4.681	9	3-1546670-2
	4.335	4.681	9	1546670-9
1	3.898	4.244	8	4-1546670-1
3 2	3.898	4.244	8	3-1546670-6
2 1	3.898	4.244	8	3-1546670-4
2 1	3.898	4.244	8	3-1546670-3
	3.898	4.244	8	1546670-8
	3.461	3.807	7	1546670-7
1	3.024	3.370	6	3-1546670-1
	3.024	3.370	6	1546670-6
1	2.587	2.933	5	2-1546670-8
1	2.587	2.933	5	2-1546670-7
	2.587	2.933	5	1546670-5
2 1	2.496	2.933	4	3-1546670-9
1	2.150	2.496	4	2-1546670-9
	2.150	2.496	4	1546670-4
	1.713	2.059	3	1546670-3
	1.276	1.622	2	1546670-2
	DIM B	DIM A	NO OF POS	PART NUMBER


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHEGEL	4/4/03	 TE Connectivity	
		CHK C RICHARD	4/4/03		
DIMENSIONS: INCHES		APVD C RICHARD	4/4/03	NAME DOUBLE ROW BARRIER STRIP W/ BINDING HD SCREW, .437 SPACING	
		PRODUCT SPEC —			
		APPLICATION SPEC —			
		SIZE A2			
		CAGE CODE 00779			
MATERIAL —		FINISH —		DRAWING NO C=1546670	
		WEIGHT —		RESTRICTED TO —	
		CUSTOMER DRAWING		SCALE NTS	
				SHEET 1 of 3	
				REV K18	

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
FT	0		—	SEE SHEET 1	—	—	—

DOUBLE SIDED, DOUBLE HOLE
QC TAB, QTY 5

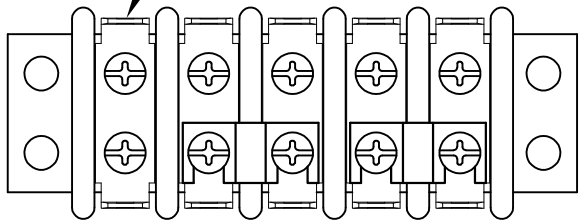


JUMPER QTY 2

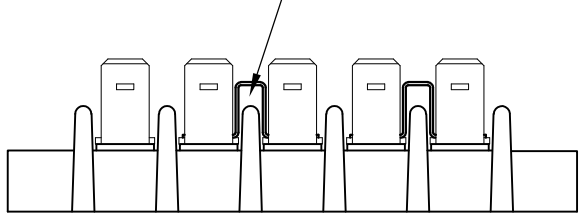


2-1546670-7

DOUBLE SIDED, DOUBLE HOLE
QC TAB, QTY 5


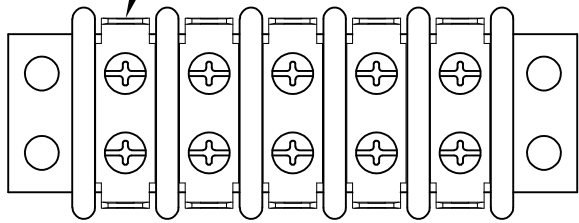


.250
TYP

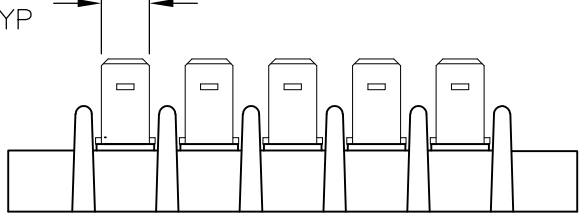

2-1546670-8


JUMPER, QTY 1

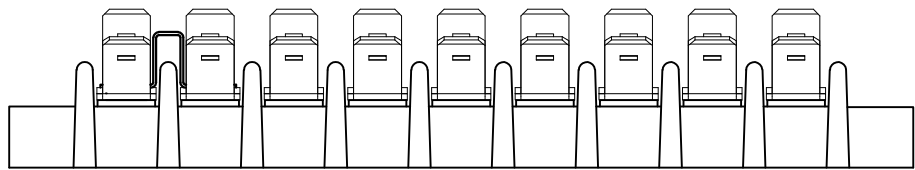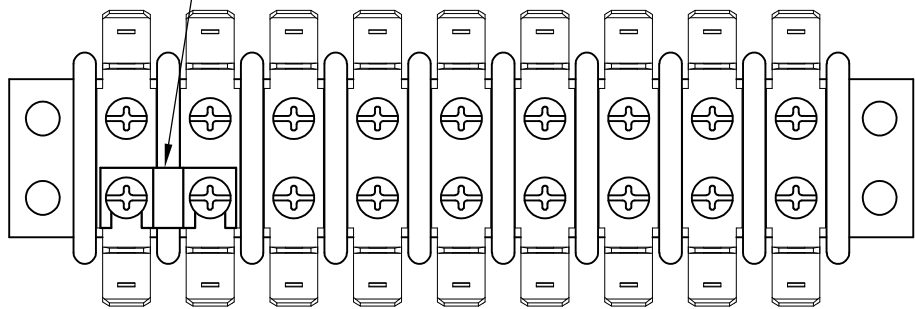


3-1546670-2

DOUBLE SIDED, DOUBLE HOLE
45° QC TAB, QTY 9


DOUBLE SIDED, DOUBLE HOLE
90° QC TAB, QTY 9

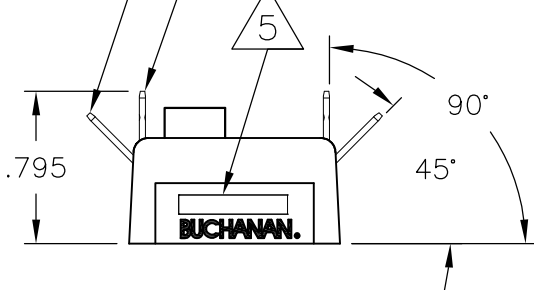

DOUBLE SIDED, DOUBLE HOLE
QC TAB, QTY 5

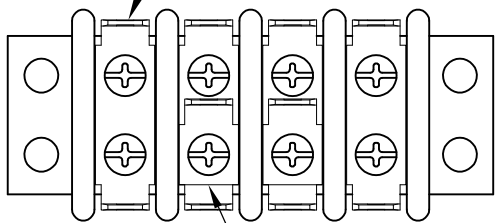


SINGLE SIDED, SINGLE HOLE
QC TAB, QTY 2

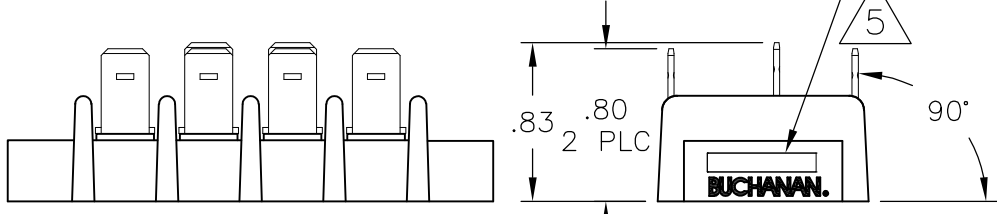


2-1546670-9

SINGLE SIDED, DOUBLE HOLE
QC TAB, QTY 6

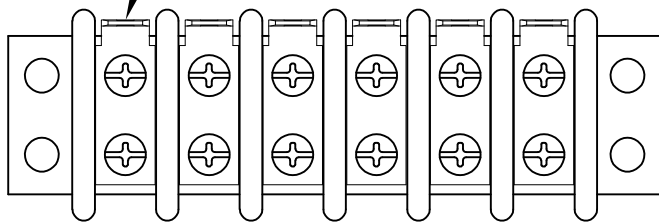



.250
TYP

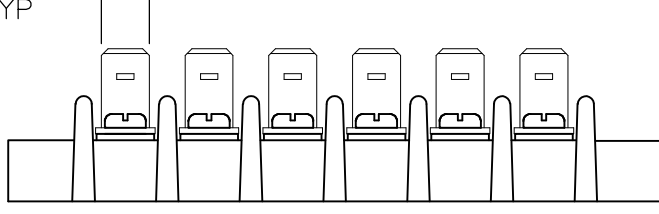

3-1546670-1

DOUBLE SIDED, DOUBLE HOLE
FLAT QC TAB, QTY 8.


JUMPER, QTY 2

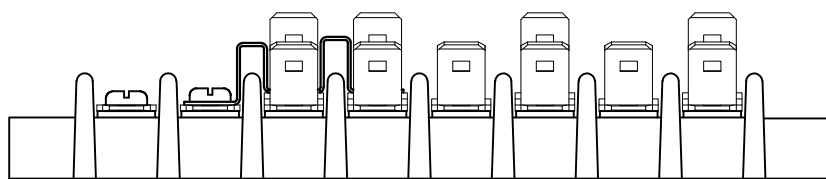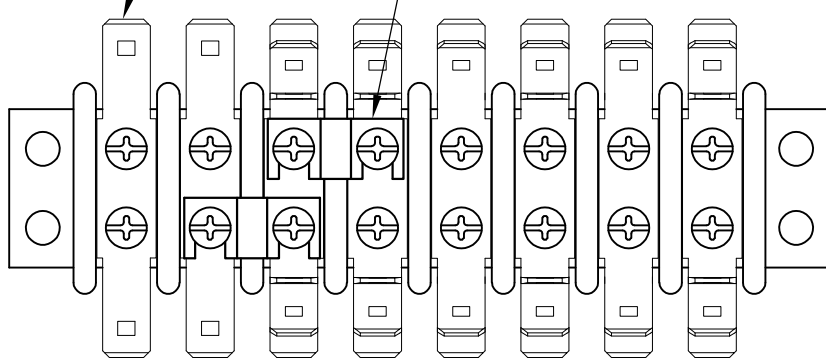


3-1546670-3

DOUBLE SIDED, DOUBLE HOLE
45° QC TAB, QTY 6


DOUBLE SIDED, DOUBLE HOLE
90° QC TAB, QTY 4

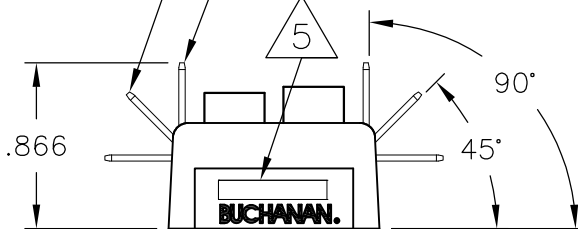

SINGLE SIDED, DOUBLE HOLE
QC TAB, QTY 18


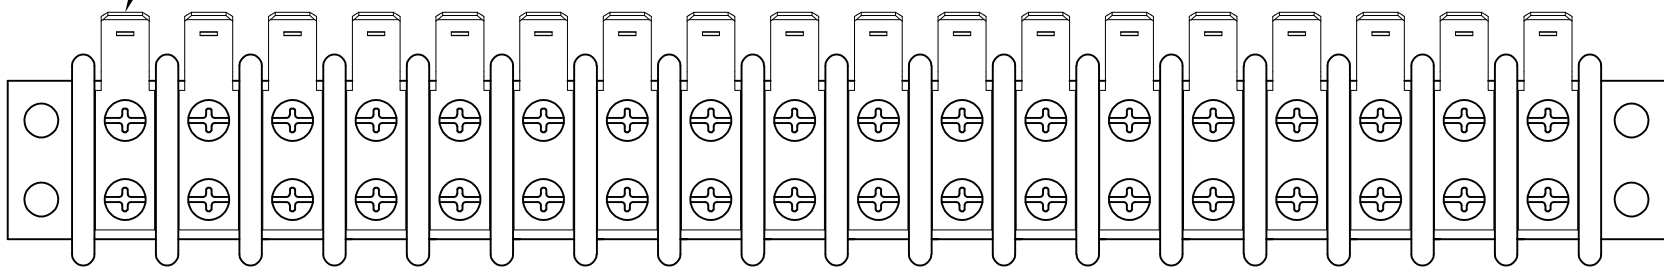


.250
TYP

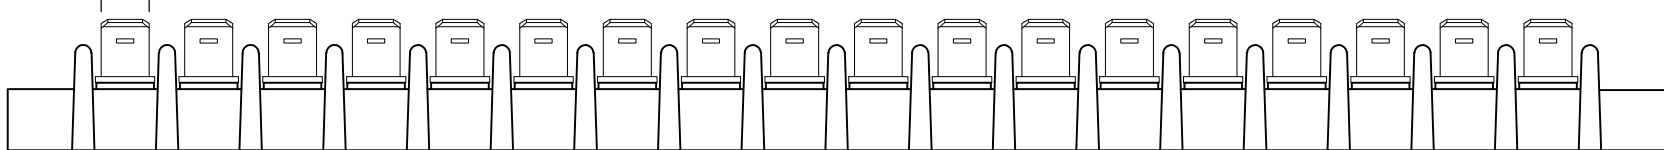

3-1546670-0

DOUBLE SIDED, DOUBLE HOLE
FLAT QC TAB, QTY 8.

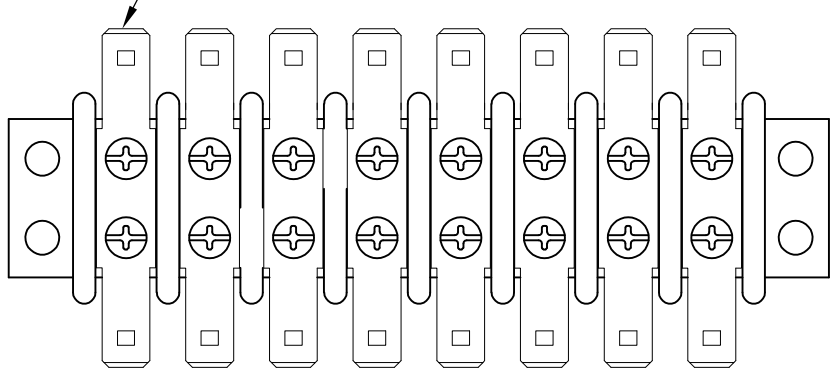

3-1546670-4

11.764	12.110	26	2-1546670-6
11.327	11.673	25	2-1546670-5
10.90	11.236	24	2-1546670-4
10.453	10.799	23	2-1546670-3
10.016	10.362	22	2-1546670-2
9.579	9.925	21	2-1546670-1
9.142	9.488	20	3-1546670-7
DIM B	DIM A	NO OF POS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHEGEL	4/4/03	 TE Connectivity			
DIMENSIONS: INCHES		CHK C RICHARD	4/4/03				
		APVD C RICHARD	4/4/03	NAME DOUBLE ROW BARRIER STRIP W/ BINDING HD SCREW, .437 SPACING			
		PRODUCT SPEC —					
		APPLICATION SPEC —					
		—					
TOLERANCES UNLESS OTHERWISE SPECIFIED:				SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
0 PLC ± —		WEIGHT —		A2	00779	C=1546670	—
1 PLC ± —		CUSTOMER DRAWING					
2 PLC ± .01							
3 PLC ± .005							
4 PLC ± —							
ANGLES ± 3°		SCALE NTS					
MATERIAL —		SHEET 2 of 3					
FINISH —		REV K18					

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.



© COPYRIGHT - By -

LOC	DIST	REVISIONS					
FT	0	P	LTR	DESCRIPTION	DATE	DWN	APVD
			—	SEE SHEET 1	—	—	—

D


DOUBLE SIDED, DOUBLE HOLE
FLAT QC TAB, QTY 9.

JUMPER, QTY 1

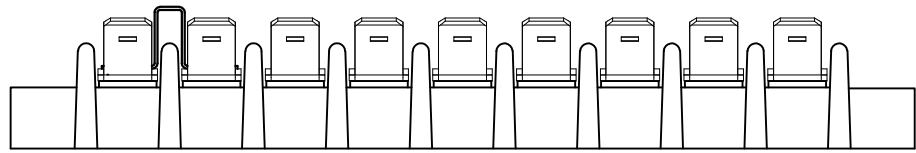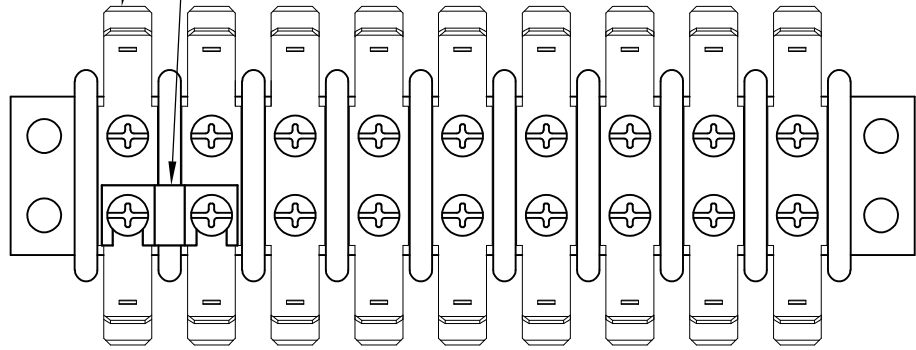


3-1546670-5

DOUBLE SIDED, DOUBLE HOLE
45° QC TAB, QTY 9

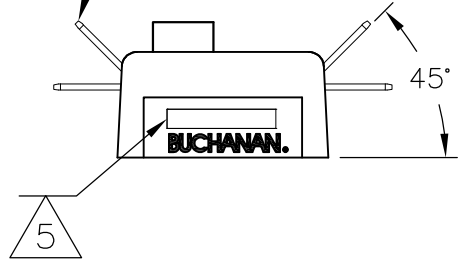


C

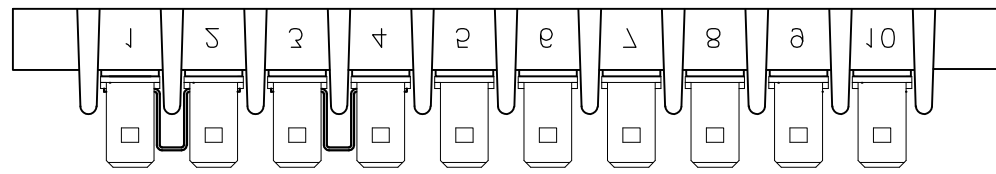


SINGLE SIDED, DOUBLE HOLE
45° QC TAB, QTY 10

SINGLE SIDED, DOUBLE HOLE
90° QC TAB, QTY 10

JUMPER, QTY 4

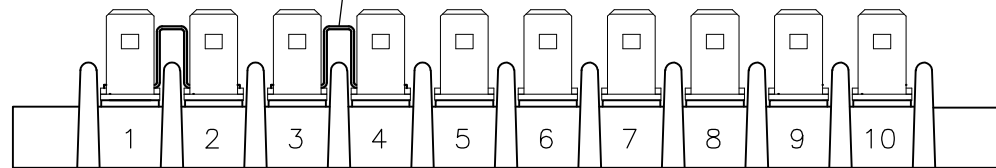


4-1546670-3

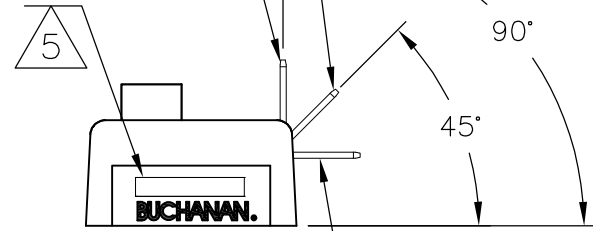


SINGLE SIDED, DOUBLE HOLE
FLAT QC TAB, QTY 10


B

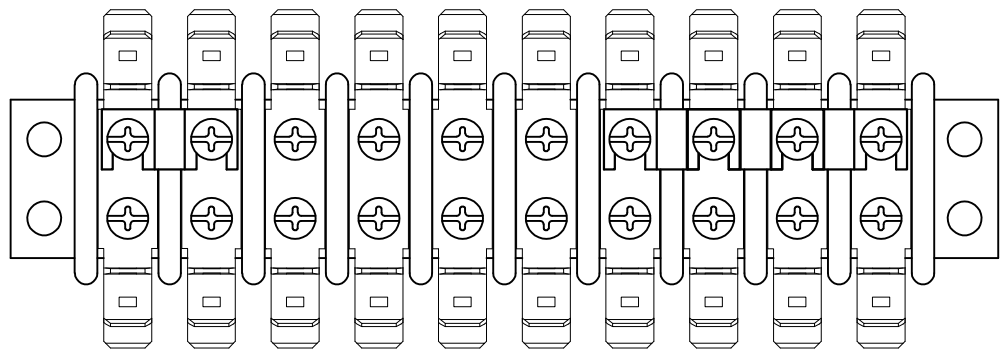



3-1546670-8

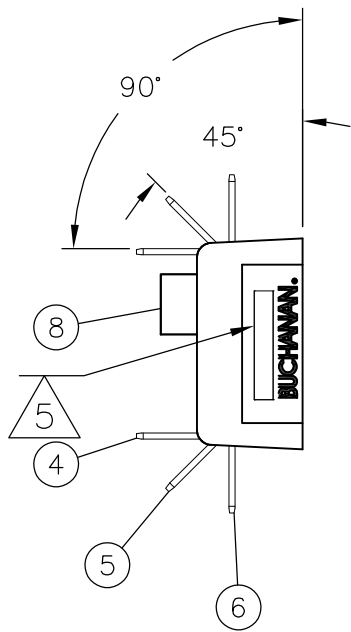

A

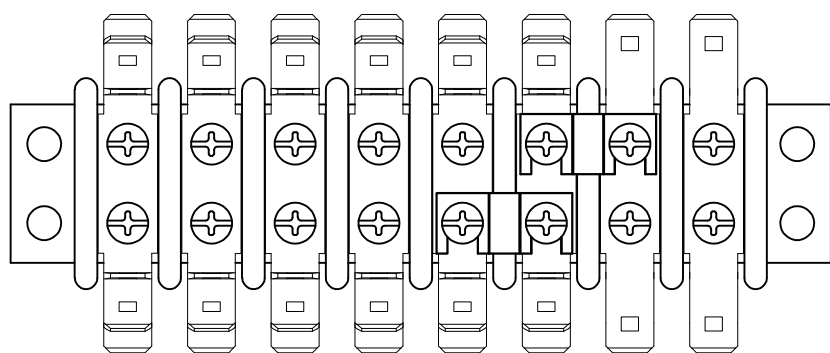

4-1546670-1

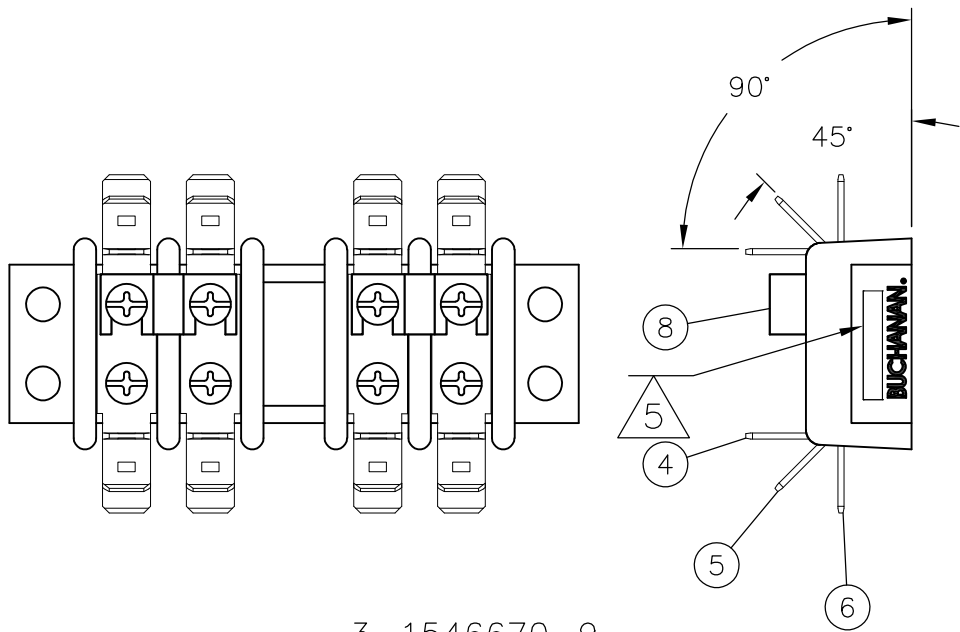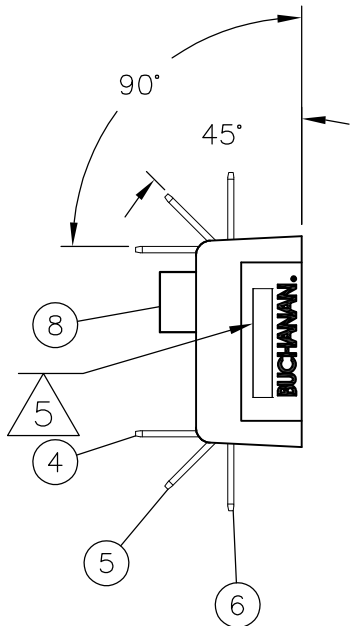

3-1546670-9

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHEGEL CHK C RICHARD APVD C RICHARD	4/4/03 4/4/03 4/4/03	 TE Connectivity	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:			
	0 PLC ± -	PRODUCT SPEC —		NAME DOUBLE ROW BARRIER STRIP W/ BINDING HD SCREW, .437 SPACING	
	1 PLC ± -				
	2 PLC ± .01				
	3 PLC ± .005				
	4 PLC ± -				
ANGLES ± 3°		APPLICATION SPEC —		SIZE A2	
MATERIAL —	FINISH —	WEIGHT —	00779	DRAWING NO C-1546670	RESTRICTED TO —
CUSTOMER DRAWING			SCALE NTS	SHEET 3 of 3	REV K18

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-1546670-4](#)