

Surface Mount Type

Series : **FK** Type : **V**
High temperature
Lead-Free reflow (suffix : A*)



Features

- Endurance : 105 °C 2000 h
- Low impedance (40 % to 60 % less than FC series)
Miniaturized (30 % to 50 % less than FC series)
- Vibration-proof product is available upon request. ($\phi 8$ mm and larger)
- RoHS compliant

Specifications


Category temperature range	-55 °C to +105 °C						
Rated voltage range	6.3 V.DC to 35 V.DC						
Capacitance range	4.7 μ F to 1500 μ F						
Capacitance tolerance	± 20 % (120 Hz/+20 °C)						
Leakage current	$I \leq 0.01 CV$ or 3 (μ A) After 2 minutes (Whichever is greater)						
Dissipation factor (tan δ)	Please see the attached characteristics list						
Characteristics at low temperature	V.DC	6.3	10	16	25	35	(Impedance ratio at 120 Hz)
	Z(-25 °C)/Z(+20 °C)	2	2	2	2	2	
	Z(-40 °C)/Z(+20 °C)	3	3	3	3	3	
	Z(-55 °C)/Z(+20 °C)	4	4	4	3	3	
Endurance	After applying rated working voltage for 2000 hours at +105 °C ± 2 °C and then being stabilized at +20 °C, Capacitors shall meet the following limits.						
	Capacitance change	Within ± 30 % of the initial value					
	tan δ	≤ 200 % of the initial limit					
Shelf life	DC leakage current						
	Within the initial limit						
Resistance to soldering heat	After storage for 1000 hours at +105 °C ± 2 °C with no voltage applied and then being stabilized at +20 °C, capacitors shall meet the limits specified in Endurance. (With voltage treatment)						
	Capacitance change	Within ± 10 % of the initial value					
	tan δ	Within the initial limit					
AEC-Q200	DC leakage current	Within the initial limit					
	AEC-Q200 compliant						

Frequency correction factor for ripple current

Capacitance (μ F)	Frequency (Hz)			
	120	1 k	10 k	100 k to
4.7 to 470	0.65	0.85	0.95	1.00
680 to 1500	0.70	0.90	0.95	1.00


Marking

Example : 6.3 V.DC 22 μ F
 Marking color : BLACK

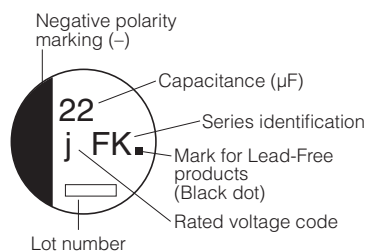

R. Voltage (V.DC)	6.3	10	16	25	35
Code	j	A	C	E	V

Dimensions

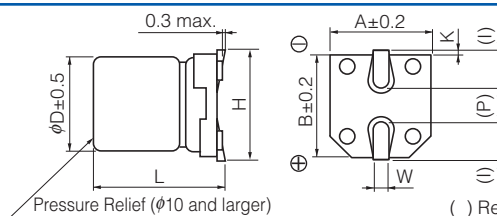

Size code	ϕD	L	A, B	H	I	W	P	K
B	4.0	5.8 ± 0.3	4.3	5.5 max.	1.8	0.65 ± 0.1	1.0	0.35 $^{+0.15}_{-0.20}$
C	5.0	5.8 ± 0.3	5.3	6.5 max.	2.2	0.65 ± 0.1	1.5	0.35 $^{+0.15}_{-0.20}$
D	6.3	5.8 ± 0.3	6.6	7.8 max.	2.6	0.65 ± 0.1	1.8	0.35 $^{+0.15}_{-0.20}$
D8	6.3	7.7 ± 0.3	6.6	7.8 max.	2.6	0.65 ± 0.1	1.8	0.35 $^{+0.15}_{-0.20}$
E	8.0	6.2 ± 0.3	8.3	9.5 max.	3.4	0.65 ± 0.1	2.2	0.35 $^{+0.15}_{-0.20}$
F	8.0	10.2 ± 0.3	8.3	10.0 max.	3.4	0.90 ± 0.2	3.1	0.70 ± 0.20
G	10.0	10.2 ± 0.3	10.3	12.0 max.	3.5	0.90 ± 0.2	4.6	0.70 ± 0.20

Characteristics list

Endurance : 105 °C 2000 h

Rated voltage (V.DC)	Cap. (±20 %) (μF)	Case size (mm)		Size* code	Specification			Part No.	Reflow	Min. Packaging Qty	
		φD	L		Ripple current (100 kHz) (+105 °C) (mA r.m.s.)	Impedance (100 kHz) (+20 °C) (Ω)	tan δ (120 Hz) (+20 °C)			Taping (pcs)	
6.3	22	4	5.8	B	90	1.35	0.26	EEEFK0J220AR	(5)	2000	
	47	4	5.8	(B)	90	1.35	0.26	EEEFKJ470UAR	(5)	2000	
		5	5.8	C	160	0.70	0.26	EEEFK0J470AR	(5)	1000	
	100	5	5.8	(C)	160	0.70	0.26	EEEFKJ101UAR	(5)	1000	
		6.3	5.8	D	240	0.36	0.26	EEEFK0J101AP	(5)	1000	
	220	6.3	5.8	D	240	0.36	0.26	EEEFK0J221AP	(5)	1000	
	330	6.3	7.7	D8	280	0.34	0.26	EEEFKJ331XAP	(5)	900	
		8	6.2	E	300	0.26	0.26	EEEFK0J331AP	(6)	1000	
	470	8	10.2	F	600	0.16	0.26	EEEFK0J471AP	(6)	500	
1000	8	10.2	F	600	0.16	0.26	EEEFK0J102AP	(6)	500		
1500	10	10.2	G	850	0.08	0.26	EEEFK0J152AP	(6)	500		
10	22	4	5.8	B	90	1.35	0.19	EEEFK1A220AR	(5)	2000	
	33	4	5.8	(B)	90	1.35	0.19	EEEFKA330UAR	(5)	2000	
		5	5.8	C	160	0.70	0.19	EEEFK1A330AR	(5)	1000	
	150	6.3	5.8	D	240	0.36	0.19	EEEFK1A151AP	(5)	1000	
	220	6.3	7.7	D8	280	0.34	0.19	EEEFKA221XAP	(5)	900	
		8	6.2	E	300	0.26	0.19	EEEFK1A221AP	(6)	1000	
	330	8	10.2	F	600	0.16	0.19	EEEFK1A331AP	(6)	500	
	470	8	10.2	F	600	0.16	0.19	EEEFK1A471AP	(6)	500	
	680	8	10.2	F	600	0.16	0.19	EEEFK1A681AP	(6)	500	
1000	10	10.2	G	850	0.08	0.19	EEEFK1A102AP	(6)	500		
16	10	4	5.8	B	90	1.35	0.16	EEEFK1C100AR	(5)	2000	
	22	4	5.8	(B)	90	1.35	0.16	EEEFKC220UAR	(5)	2000	
		5	5.8	C	160	0.70	0.16	EEEFK1C220AR	(5)	1000	
	47	5	5.8	(C)	160	0.70	0.16	EEEFKC470UAR	(5)	1000	
		6.3	5.8	D	240	0.36	0.16	EEEFK1C470AP	(5)	1000	
	68	6.3	5.8	D	240	0.36	0.16	EEEFK1C680AP	(5)	1000	
	100	6.3	5.8	D	240	0.36	0.16	EEEFK1C101AP	(5)	1000	
	150	6.3	7.7	D8	280	0.34	0.16	EEEFKC151XAP	(5)	900	
	220	6.3	7.7	D8	280	0.34	0.16	EEEFKC221XAP	(5)	900	
		8	6.2	E	300	0.26	0.16	EEEFK1C221AP	(6)	1000	
	330	8	10.2	F	600	0.16	0.16	EEEFK1C331AP	(6)	500	
	470	8	10.2	F	600	0.16	0.16	EEEFK1C471AP	(6)	500	
680	10	10.2	G	850	0.08	0.16	EEEFK1C681AP	(6)	500		
25	10	4	5.8	B	90	1.35	0.14	EEEFK1E100AR	(5)	2000	
	22	5	5.8	C	160	0.70	0.14	EEEFK1E220AR	(5)	1000	
		5	5.8	(C)	160	0.70	0.14	EEEFKE330UAR	(5)	1000	
	33	6.3	5.8	D	240	0.36	0.14	EEEFK1E330AP	(5)	1000	
		47	6.3	5.8	D	240	0.36	0.14	EEEFK1E470AP	(5)	1000
	68	6.3	5.8	D	240	0.36	0.14	EEEFK1E680AP	(5)	1000	
	100	6.3	7.7	D8	280	0.34	0.14	EEEFKE101XAP	(5)	900	
		8	6.2	E	300	0.26	0.14	EEEFK1E101AP	(6)	1000	
	150	8	10.2	F	600	0.16	0.14	EEEFK1E151AP	(6)	500	
	220	8	10.2	F	600	0.16	0.14	EEEFK1E221AP	(6)	500	
	330	8	10.2	F	600	0.16	0.14	EEEFK1E331AP	(6)	500	
	470	10	10.2	G	850	0.08	0.14	EEEFK1E471AP	(6)	500	
	35	4.7	4	5.8	B	90	1.35	0.12	EEEFK1V4R7AR	(5)	2000
		10	4	5.8	(B)	90	1.35	0.12	EEEFKV100UAR	(5)	2000
5			5.8	C	160	0.70	0.12	EEEFK1V100AR	(5)	1000	
22		5	5.8	C	160	0.70	0.12	EEEFK1V220AR	(5)	1000	
33		6.3	5.8	D	240	0.36	0.12	EEEFK1V330AP	(5)	1000	
47		6.3	5.8	D	240	0.36	0.12	EEEFK1V470AP	(5)	1000	
68		6.3	7.7	D8	280	0.34	0.12	EEEFKV680XAP	(5)	900	
100		6.3	7.7	D8	280	0.34	0.12	EEEFKV101XAP	(5)	900	
		8	10.2	F	600	0.16	0.12	EEEFK1V101AP	(6)	500	
150		8	10.2	F	600	0.16	0.12	EEEFK1V151AP	(6)	500	
220		8	10.2	F	600	0.16	0.12	EEEFK1V221AP	(6)	500	
330		10	10.2	G	850	0.08	0.12	EEEFK1V331AP	(6)	500	

* Size code() : Miniaturization product
 If Part number exceeds 12 digits, voltage code is abbreviated as follows; 0J → J, 1A → A, 1C → C, 1E → E, 1V → V
 · Please refer to the page of "Reflow Profile" and "The Taping Dimensions".
 · When requesting vibration-proof product, please put the last "V" instead of "P"

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panasonic:

[EEE-FK1V100AR](#) [EEE-FKE101XAP](#) [EEE-FKA330UAR](#) [EEE-FKC220UAR](#) [EEE-FKC470UAR](#) [EEE-FKE330UAR](#)
[EEE-FKJ101UAR](#) [EEE-FKJ331XAP](#) [EEE-FKJ470UAR](#) [EEE-FKV100UAR](#) [EEE-FKV680XAP](#) [EEE-FK0J101AP](#) [EEE-](#)
[FK0J102AP](#) [EEE-FK0J152AP](#) [EEE-FK0J220AR](#) [EEE-FK0J221AP](#) [EEE-FK0J331AP](#) [EEE-FK0J470AR](#) [EEE-](#)
[FK0J471AP](#) [EEE-FK1A151AP](#) [EEE-FK1A220AR](#) [EEE-FK1A221AP](#) [EEE-FK1A330AR](#) [EEE-FK1A331AP](#) [EEE-](#)
[FK1A471AP](#) [EEE-FK1A681AP](#) [EEE-FK1C220AR](#) [EEE-FK1C221AP](#) [EEE-FK1C331AP](#) [EEE-FK1C470AP](#) [EEE-](#)
[FK1C471AP](#) [EEE-FK1C680AP](#) [EEE-FK1E100AR](#) [EEE-FK1E101AP](#) [EEE-FK1E151AP](#) [EEE-FK1E220AR](#) [EEE-](#)
[FK1E221AP](#) [EEE-FK1E330AP](#) [EEE-FK1E331AP](#) [EEE-FK1E470AP](#) [EEE-FK1E680AP](#) [EEE-FK1V151AP](#) [EEE-](#)
[FK1V220AR](#) [EEE-FK1V330AP](#) [EEE-FK1V4R7AR](#) [EEE-FK1V101AP](#) [EEE-FK1E471AP](#) [EEE-FK1C101AP](#) [EEE-](#)
[FK1V470AP](#) [EEE-FK1V331AP](#) [EEE-FK1V221AP](#) [EEE-FKC221XAP](#) [EEE-FK1C681AP](#) [EEE-FK1C100AR](#) [EEE-](#)
[FK1A102AP](#) [EEE-FKA221XAP](#) [EEE-FKC151XAP](#)