

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	P3	REVISED PER ECO-11-004587	11MAR11	RK	HMR
	R	REVISED PER ECO-17-002583	08APR2017	RS	MM

△1 HOUSING: FLAME RETARDANT, LCP, BLACK
POST: BRASS

 POINT OF MEASUREMENT FOR PLATING THICKNESS

3 THE NOTED DIMENSIONS APPLY FROM THE BASIC
DIMENSION LINE (NOT THE POST CENTERLINE)
TO THE SURFACE INDICATED

4 ON ASSEMBLIES WITH FOUR OR MORE POSITIONS,
TWO POLARIZATION SLOTS.
ON ASSEMBLIES WITH TWO OR THREE POSITIONS,
ONE POLARIZATION SLOT.



5 FOR USE WITH .062±.008 PRINTED CIRCUIT BOARD

6 .000030 GOLD IN THE CONTACT AREA,
.000100-.000200 MATTE TIN-LEAD ON THE
SOLDER TAIL, ALL OVER .000050 NICKEL


7 .000030 GOLD IN THE CONTACT AREA,
 .000100-.000200 MATTE TIN ON THE
 SOLDER TAIL, ALL OVER .000050 NICKEL

8 HIGH TEMPERATURE CONFIGURATION.

9 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

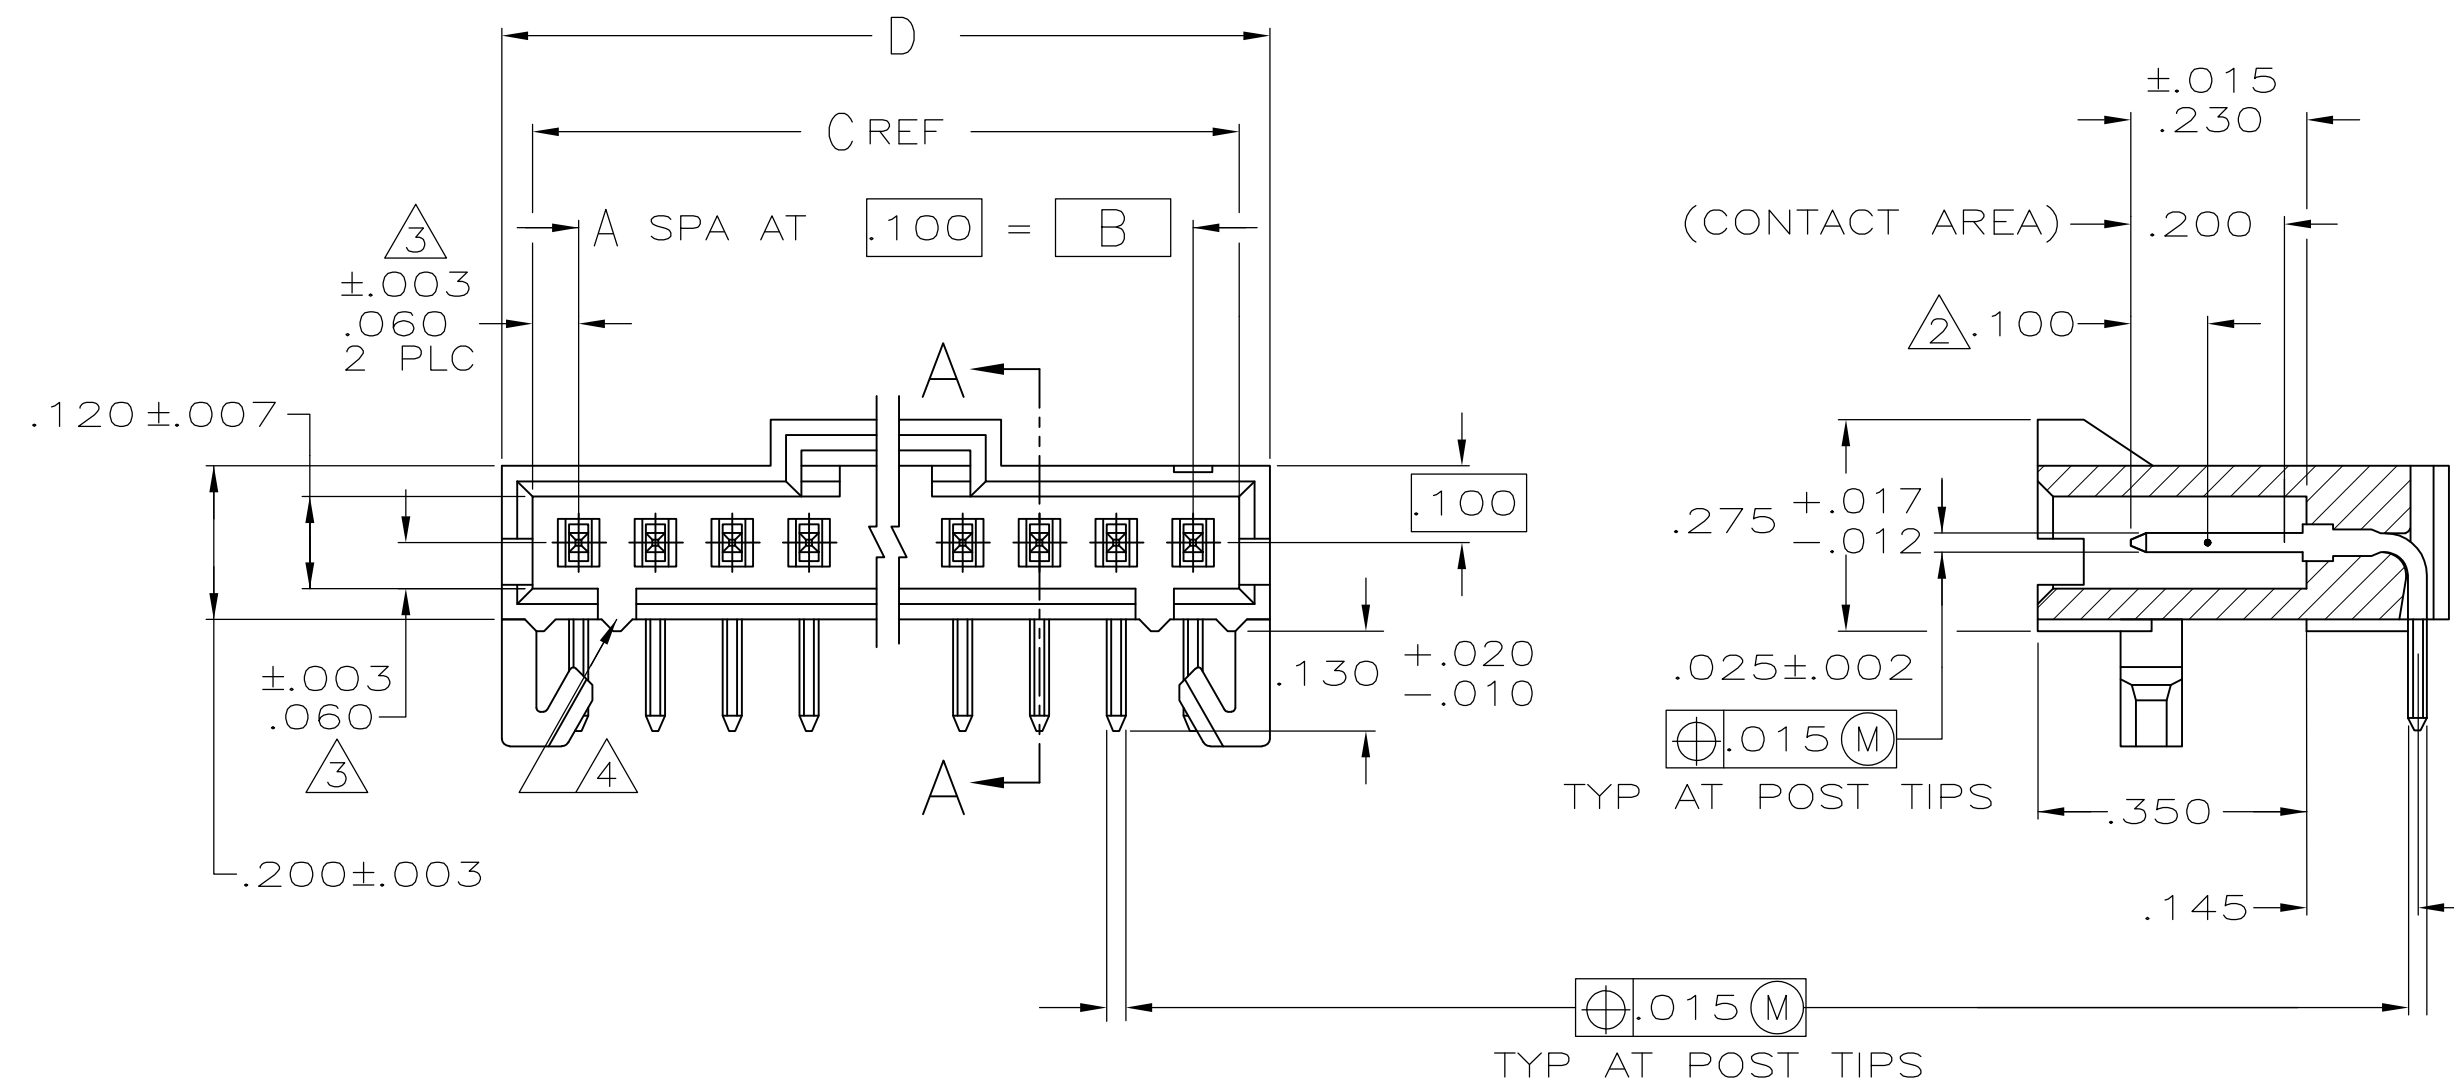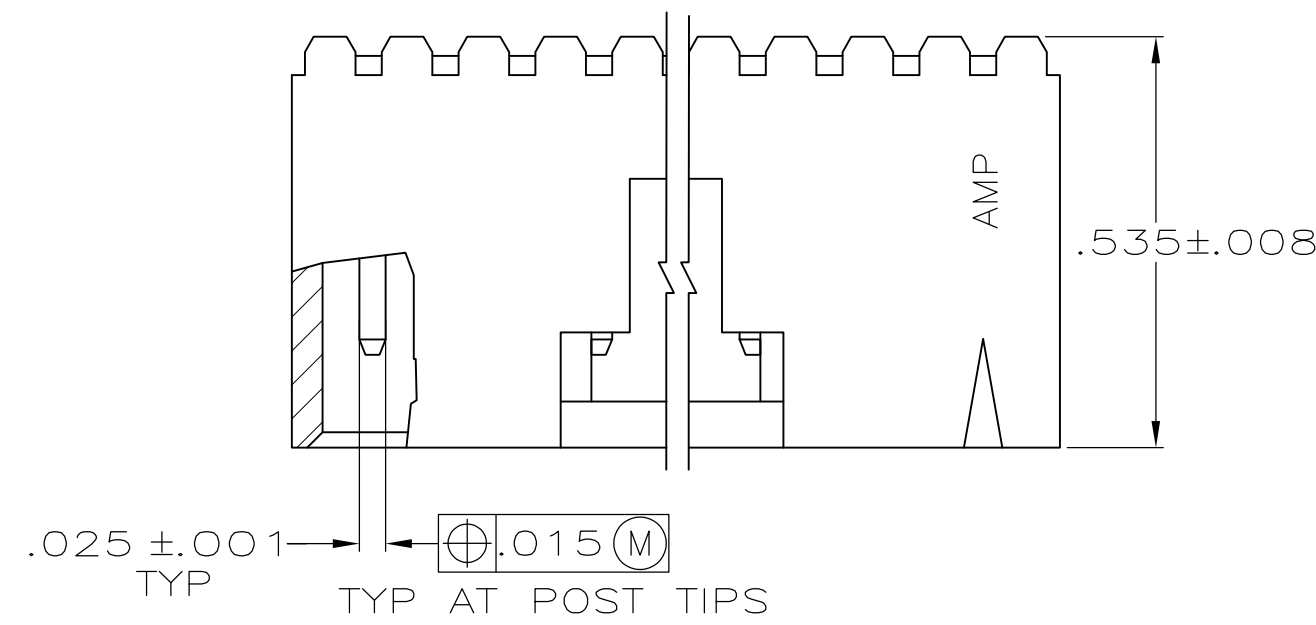

SECTION A-A

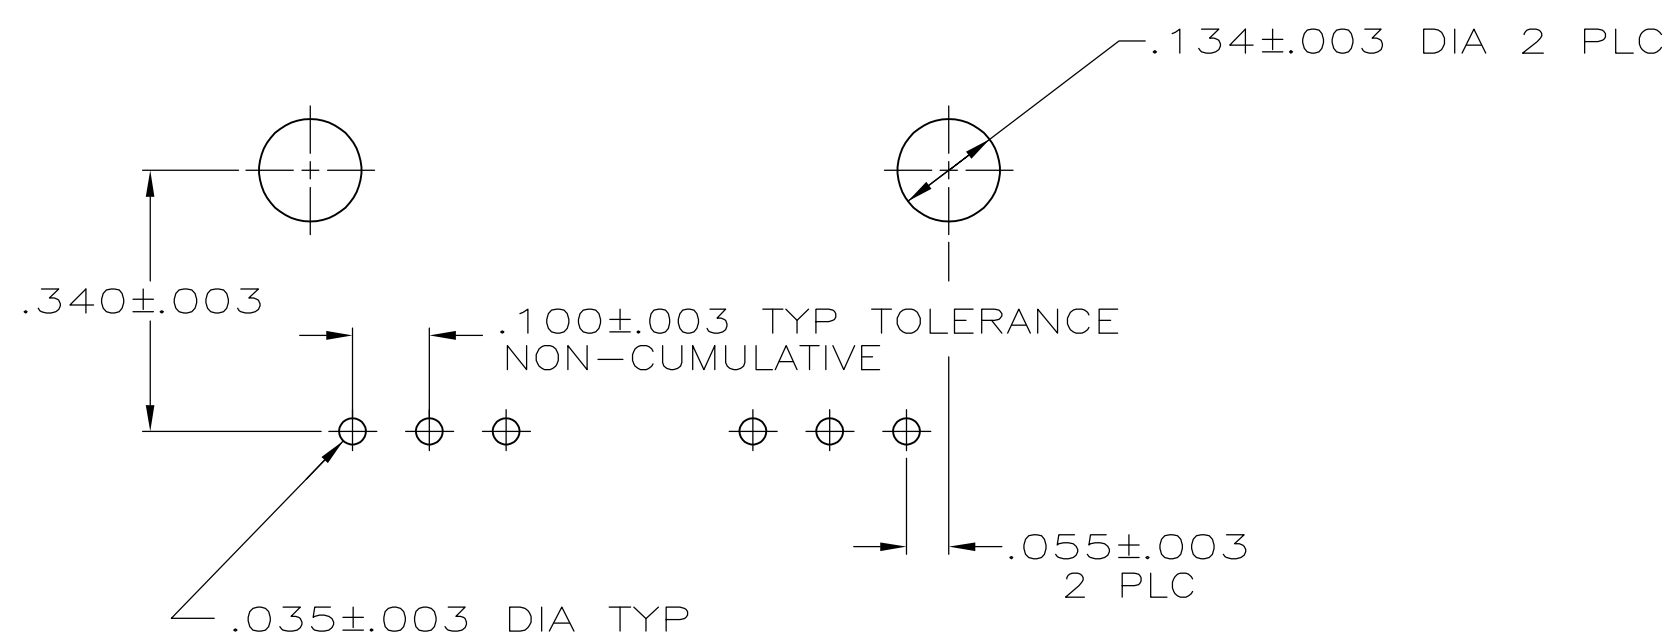

RECOMMENDED HOLE LAYOUT

[illegible]

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN 5-17-93 E. BRANDBERG OK: J. GESFORD 5-17-93		 TE Connectivity	
DIMENSIONS: INCHES		TOLERANCES, UNLESS OTHERWISE SPECIFIED: 0 PLC ± .- 1 PLC ± .- 2 PLC ± .- 3 PLC ± .005 4 PLC ± .- ANGLES ± .-		NAME HEADER ASSY, AMPMODU MTE, RIGHT ANGLE, SINGLE ROW, 100CL .025 SQ POSTS, WITH LATCH & HOLD DOWNS	
		PRODUCT SPEC 108-25034 APPLICATION SPEC -		SIZE CAGE CODE DRAWING NO A1 00779	
MATERIAL 		WEIGHT SEE TABLE		RESTRICTED TO -	
CUSTOMER DRAWING				SCALE 4:1 SHEET 1 OF 1 REV R	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[103904-6](#)