



Data Sheet

Typical Performance

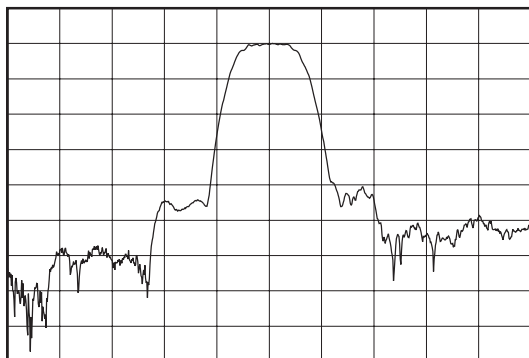

Horizontal: 3 MHz/Div
 Vertical: 10 dB/Div

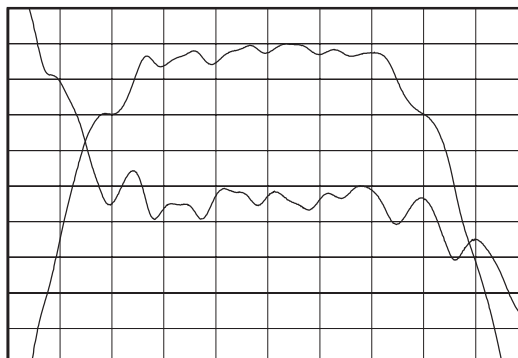


Horizontal: 500 kHz/Div
 Vertical: 1 dB/Div
 Vertical: 4 deg/Div


Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	69.85	70	70.15
Insertion Loss at F_0	dB	-	6.95	7.5
1 dB Bandwidth	MHz	2.3	2.6	-
3 dB Bandwidth	MHz	3	3.5	-
35 dB Bandwidth	MHz	-	6.9	7.5
Passband Ripple	dB	-	0.65	1
Phase Linearity (70% of 3dB Bandwidth)	deg	-	3	5
Group Delay Variation (70% of 3dB Bandwidth)	nsec	-	115	175
Absolute Delay	μsec	-	0.94	-
Substrate Material	-	-	YZ LiNbO ₃	-
Temperature Coefficient	ppm/°C	-	-94	-
Ambient Temperature	°C	-	25	-

Package Outline

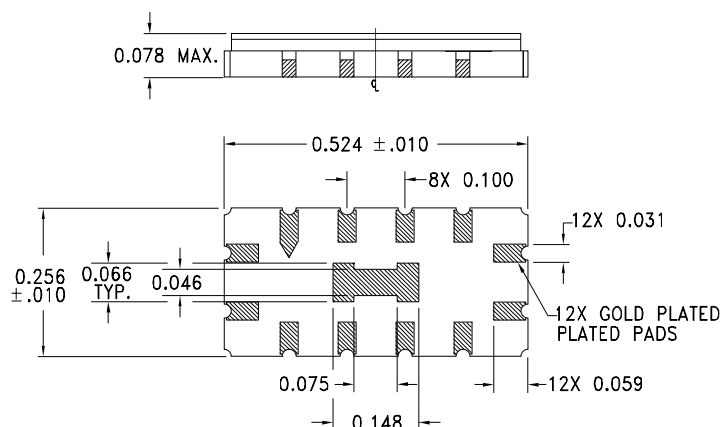

Matching Configuration

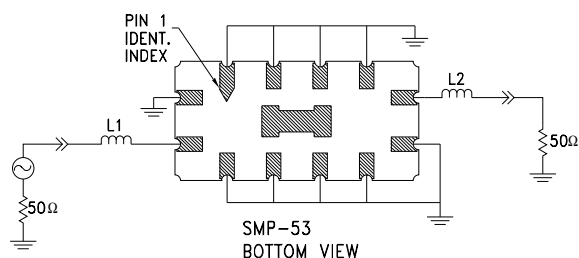

L1 = 220nH, L2 = 82nH
 Nominal Source/Load Impedance = 50Ω
 Package Style SMP-53

11/24/99

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Qorvo:](#)

[854656](#) [854656-EVB](#)