

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0367570143](#)
Status: **Active**
Overview: [MLX Power Connectors](#)
Description: 6.35mm Pitch MLX Power Connector Header with Socket Terminal, Vertical, 4 Circuits, Nylon 6/6 94V-2, Tin (Sn) Plating, Natural, Lead-Free, Glow-Wire Capable with CTI of 325V

Documents:


3D Model	Packaging Specification PK-43255-001-001 (PDF)
Drawing (PDF)	Packaging Specification PK-43255-003-001 (PDF)
Product Specification PSX-42002-0001-001 (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification

CSA	LR19980
UL	E29179

General

Product Family	PCB Headers
Series	36757
3D Viewer	Yes
Application	Power, Wire-to-Board
CURRENT-MAX-NUMERIC	13.5, 20.0
Comments	<p>""""""Glow Wire compatible with CTI of 325V<P><P>This Molex product is manufactured from material that has the following ratings, tested by independent agencies:. a) A Glow Wire Ignition Temperature (GWIT) of at least 775 deg C per IEC 60695-2-13.. b) A Glow Wire Flammability Index (GWFI) above 850 deg C per IEC 60695-2-12.and hence complies with the requirements set out in the International Standard IEC 60335-1 5th edition - household and similar electrical appliances - safety, section 30 Resistance to heat and fire. <P><P> The customers using this product must determine its suitability for use in their particular application through testing or other acceptable means as described in end-product glow-wire flammability test standard IEC 60695-2-11 and any applicable product end-use standard(s). <P> If it is determined during the customer's evaluation of suitability, that higher performance is required, please contact Molex for possible product options. """""" , """"""Glow Wire compatible with CTI of 325V<P><P>This Molex product is manufactured from material that has the following ratings, tested by independent agencies:. a) A Glow Wire Ignition Temperature (GWIT) of at least 775 deg C per IEC 60695-2-13.. b) A Glow Wire Flammability Index (GWFI) above 850 deg C per IEC 60695-2-12.and hence complies with the requirements set out in the International Standard IEC 60335-1 5th edition - household and similar electrical appliances - safety, section 30 Resistance to heat and fire. <P><P> The customers using this product must determine its suitability for use in their particular application through testing or other acceptable means as described in end-product glow-wire flammability test standard IEC 60695-2-11 and any applicable product</p>

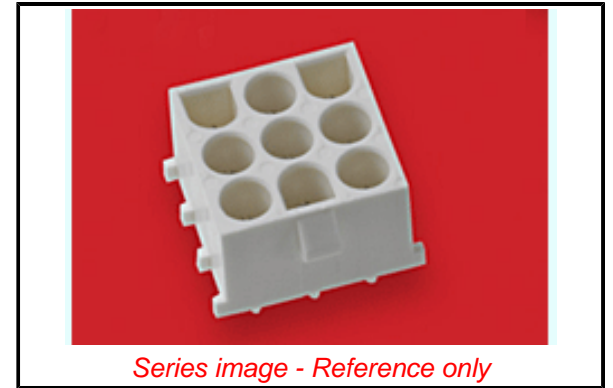

EU ELV

Not Reviewed

EU RoHS

Not Reviewed

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

For more information, please visit [Contact US](#)

China ROHS

Not Reviewed

ELV

Not Reviewed

RoHS Phthalates

Not Reviewed

Search Parts in this Series

[36757 Series](#)

Mates With

[42021 Plug](#)

end-use standard(s). <P> If it is determined during the customer's evaluation of suitability, that higher performance is required, please contact Molex for possible product options. """"""""

Overview MLX Power Connectors

PITCH-MATING-NUMERIC

6.35

Product Name

MLX

UPC

884982521896

Physical

Breakaway	No
Circuits (Loaded)	4
Circuits (maximum)	4
Color - Resin	Natural
Durability (mating cycles max)	50
First Mate / Last Break	No
Flammability	94V-2
Glow-Wire Capable	Yes
Guide to Mating Part	Yes
Keying to Mating Part	Yes
Lock to Mating Part	Yes
Material - Plating Mating	Tin
Material - Resin	Nylon
Net Weight	2.816/g
Number of Rows	1
Orientation	Vertical
PC Tail Length	4.27mm
PCB Retention	Yes
PCB Thickness - Recommended	1.60mm
Packaging Type	Bag
Pitch - Mating Interface	6.35mm
Polarized to PCB	Yes
Shrouded	Fully
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-55° to +105°C
Termination Interface: Style	Through Hole

Electrical

Current - Maximum per Contact	13.5A, 20.0A
Voltage - Maximum	600V

Material Info

Reference - Drawing Numbers

Packaging Specification	PK-43255-001-001, PK-43255-003-001
Product Specification	PSX-42002-0001-001
Sales Drawing	SD-36757-0002

This document was generated on 09/24/2019

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[36757-0143](#)