


TOLERANCE = $\pm .010$

COIL: @ 25°C
 RESISTANCE 310 OHMS $\pm 10\%$
 NOMINAL VOLTAGE 12.0 VDC
 MUST OPERATE 5.6 VDC
 MUST RELEASE 3.35 VDC MAX, 0.55 VDC MIN.

CUSTOMER DATA SHEET

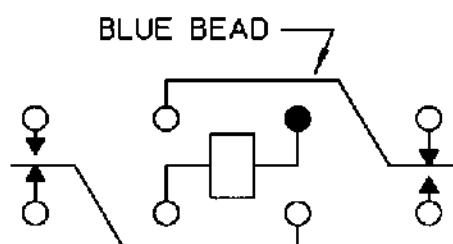

CONTACT RATING: LOW LEVEL TO 2A
28 VDC RESISTIVE 100,000 OPERATIONS

ENVIRONMENT:
 VIBRATION 10 CPS TO 2500 CPS @ 20 g's
 SHOCK 50 g's 6 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C
 NOTES: OPERATE TIME 6 MS MAX.
RELEASE TIME 5 MS MAX.
CONTACT STABILIZATION 2 MS MAX.

DR. R.B. 11/30/95 CK. 11/30/95

 COMMUNICATIONS
INSTRUMENTS, INC.

CUST. OPL
 CUST. NO. M39016/44-022M

TYPE "HMS" RELAY

HMS1131S03M

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[HMS1131S03M](#)