


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:	0022285063
Status:	Active
Overview:	KK® Interconnect System - Molex
Description:	KK 254 Breakaway Header, Vertical, 6 Circuits, 0.38µm Gold (Au) Selective Plating, Mating Pin Length 6.09mm, with Kinked PC Tails
Documents:	
3D Model	Product Specification PS-10-07-001 (PDF)
Drawing (PDF)	Packaging Specification PK-40873-0041-001 (PDF)
3D Model (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification	
CSA	LR19980
UL	E29179
General	
Product Family	PCB Headers
Series	42375
Application	Board-to-Board, Signal, Wire-to-Board
Overview	KK® Interconnect System - Molex
Product Name	KK 254
UPC	800754940016
Physical	
Breakaway	Yes
Circuits (Loaded)	6
Circuits (maximum)	6
Color - Resin	Black
Durability (mating cycles max)	100
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	None
Material - Metal	Brass
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	0.373/g
Number of Rows	1
Orientation	Vertical
PC Tail Length	3.43mm
PCB Locator	No
PCB Retention	Yes
PCB Thickness - Recommended	1.60mm
Packaging Type	Bag
Pitch - Mating Interface	2.54mm
Plating min - Mating	0.381µm
Plating min - Termination	2.540µm
Polarized to Mating Part	No
Polarized to PCB	No
Shrouded	No
Stackable	No
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	See Product Specification
Termination Interface: Style	Through Hole

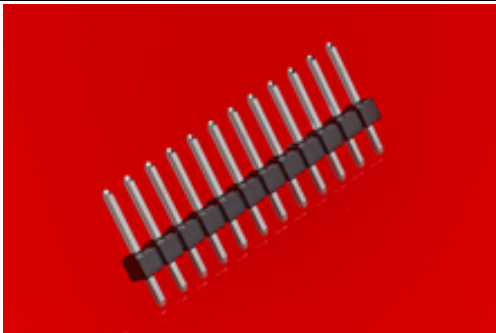

Series image - Reference only

EU ELV	
Not Relevant	
EU RoHS	China RoHS
Compliant	
REACH SVHC	
Not Contained Per - ECHA_01_2020 (16 January 2020)	
Halogen-Free Status	
Not Low-Halogen	
For more information, please visit Contact US	
China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series
[42375](#) Series

Mates With
KK Crimp Housing [2695](#) , [6471](#) , [7880](#) , KK PC Board Connector [4455](#)

Electrical

Current - Maximum per Contact	4.0A
Voltage - Maximum	500V

Solder Process Data

Duration at Max. Process Temperature (seconds)	005
Lead-freeProcess Capability	WAVE
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	260

Material Info

Engineering Number	42375-0356
--------------------	------------

Reference - Drawing Numbers

Packaging Specification	PK-40873-0041-001
Product Specification	PS-10-07-001
Sales Drawing	SD-42375-001

This document was generated on 04/14/2020

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[22-28-5063](#)