

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0877590475

Status:


Active

Overview:

Milli-Grid Connector System

Description:

Milli-Grid Header, Surface Mount, Vertical, 4 Circuits, 0.76µm Gold (Au) Selective Plating, with Pick-and-Place Cap, Tape and Reel Packaging, without Press-fit Plastic Pegs, Lead-Free

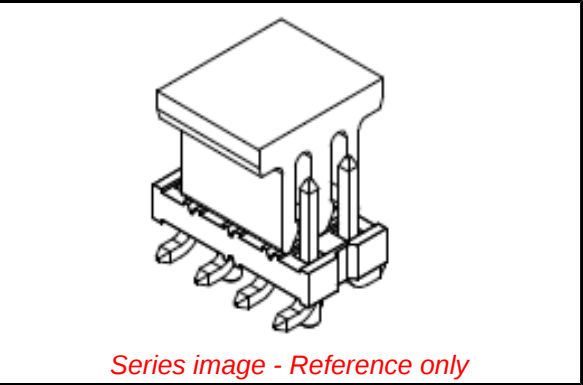

Documents:	
3D Model	Packaging Specification PK-89990-485-001 (PDF)
Drawing (PDF)	Test Summary 877610000-TS-000 (PDF)
Product Specification PS-87761-100-001 (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification	
UL	E29179
General	
Product Family	PCB Headers
Series	87759
3D Viewer	Yes
Application	Board-to-Board, Signal
CURRENT-MAX-NUMERIC	2.0
Overview	Milli-Grid Connector System
PITCH-MATING-NUMERIC	2.00
Product Name	Milli-Grid
UPC	822348309573
Physical	
Breakaway	Yes
Circuits (Loaded)	4
Circuits (maximum)	4
Color - Resin	Black
Durability (mating cycles max)	100
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	None
Mated Height	3.80mm
Material - Metal	Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	98.916/mg
Number of Rows	2
Orientation	Vertical
PCB Locator	No
PCB Retention	None
Packaging Type	Embossed Tape on Reel
Pitch - Mating Interface	2.00mm
Pitch - Termination Interface	2.00mm
Plating min - Mating	0.762µm
Polarized to Mating Part	No
Polarized to PCB	No
Robotic Placement	Pick and Place Cap
Shrouded	No
Stackable	Yes

EU ELV	
Not Relevant	
EU RoHS	China RoHS
Not Reviewed	
REACH SVHC	
Not Contained Per - ED/30/2017 (7 July 2017)	
Halogen-Free	
Status	
Not Low-Halogen	
For more information, please visit Contact US	
China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series

87759 Series

Mates With

Milli-Grid Vertical Through Hole Receptacle [79107](#) , [78787](#) , Milli-Grid Flex-to-Board Vertical Receptacle [79108](#) , Milli-Grid Vertical Surface Mount Receptacle [79109](#) , [78788](#) , Milli-Grid Top Entry Surface Mount Receptacle [87381](#) , Milli-Grid Crimp Housing [51110](#)

Temperature Range - Operating	-55° to +105°C
Termination Interface: Style	Surface Mount
Electrical	
Current - Maximum per Contact	2.0A
Voltage - Maximum	125V
Solder Process Data	
Duration at Max. Process Temperature (seconds)	010
Lead-freeProcess Capability	REFLOW
Max. Cycles at Max. Process Temperature	003
Process Temperature max. C	260
Material Info	
Reference - Drawing Numbers	
Packaging Specification	PK-89990-485-001
Product Specification	PS-87761-100-001
Sales Drawing	SD-87759-117-001
Test Summary	877610000-TS-000

This document was generated on 09/25/2019

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

87759-0475