





## Heyco® Nylon PCB Supports - Blind and Key Slot Mount

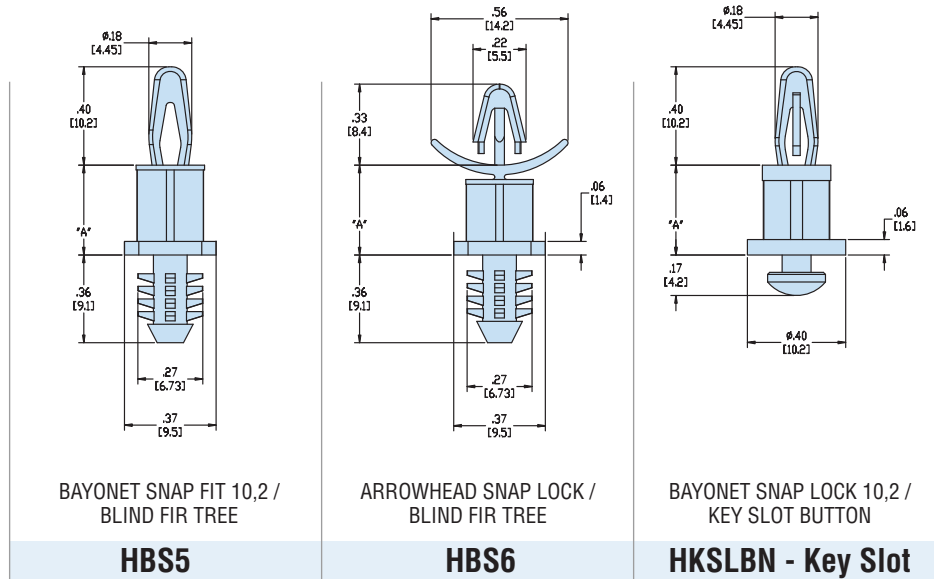

	Minimum Thickness		Mounting Hole Diameter		Minimum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Slot Width	
	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
<b>PCB</b>	.062	1,6	.157	4,0	.078	2,0	.157	4,0	.062	1,6	.157	4,0
<b>Chassis</b>	.250	6,4	.250	6,4	.250	6,4	.250	6,4	.062	1,6	see diagram	

A		PART NO. Natural	DESCRIPTION	PART NO. Natural	DESCRIPTION	PART NO. Natural	DESCRIPTION
in.	mm.						
.125	3,2					<b>10611</b>	HKSLBN-02
.187	4,8	<b>10587</b>	HBS5-03				
.250	6,4	<b>10588</b>	HBS5-04	<b>10596</b>	HBS6-04	<b>10612</b>	HKSLBN-04
.375	9,5	<b>10589</b>	HBS5-06	<b>10597</b>	HBS6-06	<b>10613</b>	HKSLBN-06
.437	11,1	<b>10590</b>	HBS5-07				
.500	12,7	<b>10591</b>	HBS5-08	<b>10598</b>	HBS6-08	<b>10614</b>	HKSLBN-08
.625	15,9	<b>10592</b>	HBS5-10	<b>10599</b>	HBS6-10		
.750	19,1	<b>10593</b>	HBS5-12	<b>10600</b>	HBS6-12		
.875	22,2	<b>10594</b>	HBS5-14	<b>10601</b>	HBS6-14		
1.000	25,4						

Standard color natural. For special order parts in UL 94V-0 natural material, add the suffix “F” to Part No.



Material: Nylon 6/6  
 Flammability Rating: 94V-2  
 Temperature Range: -40°F (-40°C) to 185°F (85°C)

Quick  
Specs

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Heyco:](#)

[10591](#) [10603](#) [10599](#) [10596](#) [10588](#) [10587](#) [10590](#) [10604](#) [10613](#) [10589](#) [10597](#) [10593](#) [10592](#) [10598](#) [10601](#)  
[10606](#) [10612](#) [10611](#) [10607](#) [10609](#) [10594](#) [10600](#) [10605](#) [10614](#) [10608](#)