

Features

- Qualified with 65kV/ μ s @ Vcommon mode =1KV
- UL/CSA and IEC/EN safety certified
- High isolation 6.4kVDC
- Optional continuous short circuit protection
- /X2 version with >9mm input/output clearance
- Suitable for IGBT applications

Unregulated Converters

RECOM DC/DC Converter

RxxPxx

**1 Watt
SIP7
Single and Dual
Output**




Description

The RxxPxxS_D Series of DC/DC Converters are certified to UL/CSA60950-1 as well as EN60950-1. This makes them ideal for medical and safety applications where approved isolation is required.

Selection Guide


Part Number	nom. Input Voltage [VDC]	Output Voltage [VDC]	Output Current [mA]	Efficiency typ. ⁽¹⁾ [%]	max. Capacitive Load ⁽²⁾ [μ F]
RxxP3.3S ^(3,4)	5, 12, 15, 24	3.3	303	70	2200
RxxP05S ^(3,4)	5, 12, 15, 24	5	200	70 - 75	1000
RxxP09S ^(3,4)	5, 12, 15, 24	9	111	70 - 75	1000
RxxP12S ^(3,4)	5, 12, 15, 24	12	84	70 - 75	470
RxxP15S ^(3,4)	5, 12, 15, 24	15	66	75 - 80	470
RxxP3.3D ^(3,4)	5, 12, 15, 24	\pm 3.3	\pm 151	70	\pm 1000
RxxP05D ^(3,4)	5, 12, 15, 24	\pm 5	\pm 100	70 - 75	\pm 470
RxxP09D ^(3,4)	5, 12, 15, 24	\pm 9	\pm 55	70 - 75	\pm 470
RxxP12D ^(3,4)	5, 12, 15, 24	\pm 12	\pm 41	70 - 75	\pm 220
RxxP15D ^(3,4)	5, 12, 15, 24	\pm 15	\pm 33	75 - 80	\pm 220
RxxP1509D ^(3,4)	12, 24	+15/-9	+33/-56	70 - 80	\pm 220
R05P1509D ^(3,4)	5	+15/-9	\pm 42	70 - 80	+68/-220

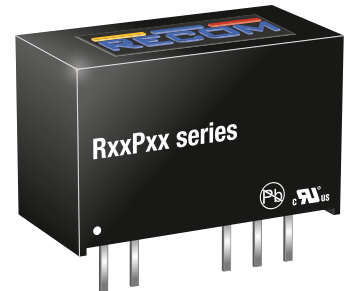

Notes:

- Note1: Efficiency is tested at nominal input and full load at +25°C ambient
 Note2: Max. Capacitive Load is defined as the capacitive load that will allow start up in under 1 second without damage to the converter

Model Numbering

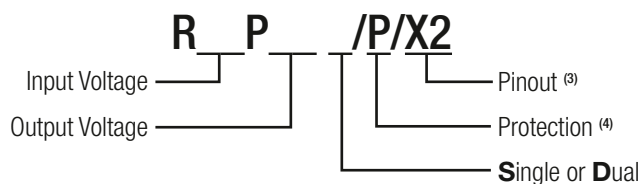

Notes:

- Note3: add suffix „/X2“ for single output with alternative pinout
 Note4: add suffix „P“ for continuous short circuit protection

Ordering Examples:

- R05P05S/P = 5V Input, 5V Output, Single Output, Continuous Short Circuit Protection
 R05P3.3D/P = 5V Input, 3.3V Output, Dual Output, Continuous Short Circuit Protection
 R05P05S/P/X2 = 5V Input, 5V Output, Single Output, Continuous Short Circuit Protection, Alternative Pinout



www.recom-power.com/eval-ref-boards

www.recom-power.com/bier

Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

BASIC CHARACTERISTICS


Parameter	Condition	Min.	Typ.	Max.
Input Voltage Range			±10%	
Minimum Load ⁽⁵⁾			0%	
Internal Operating Frequency	all types PxxP1509D	20kHz 20kHz	50kHz 60kHz	85kHz
Output Ripple and Noise	20MHz BW			200mVp-p

Notes:


Note5: Operation below 10% load will not harm the converter, but specifications may not be met

Efficiency vs. Load


PxxP05S and PxxP09S

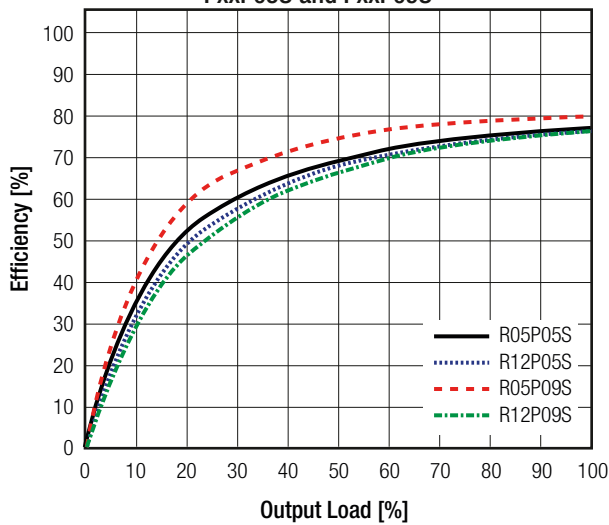


PxxP05D and PxxP09D

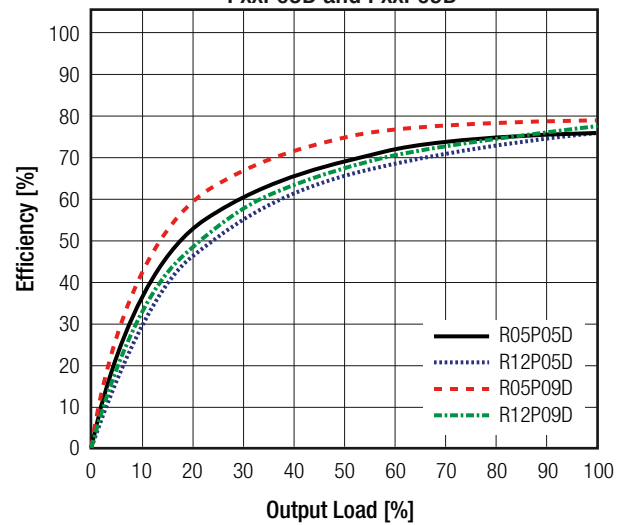

PxxP12S and PxxP15S

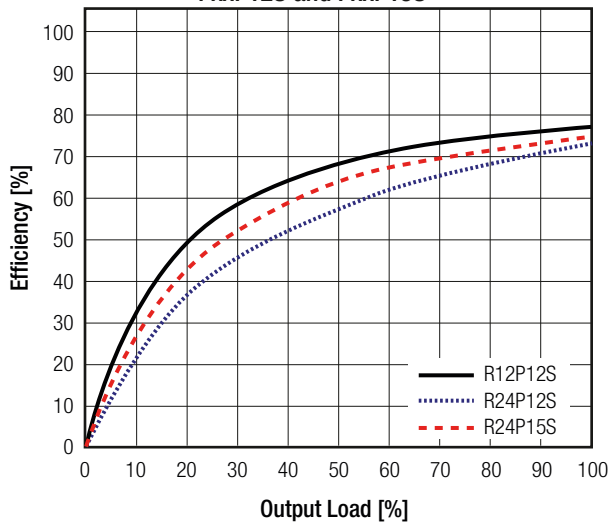

PxxP12D and PxxP15D

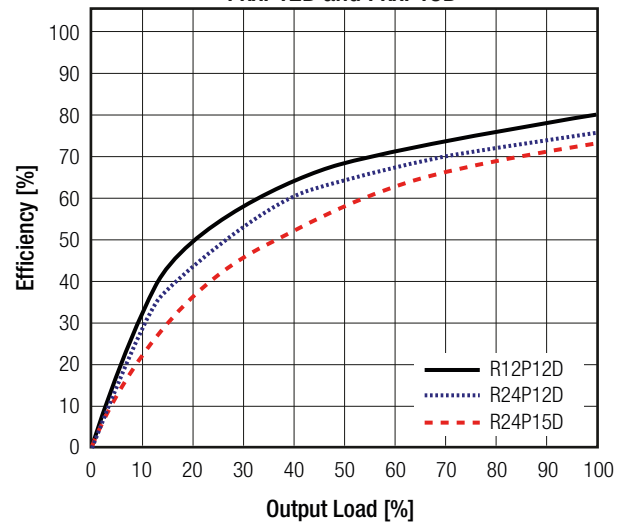


REGULATIONS

Parameter	Condition		Value
Output Accuracy			±5.0% max.
Line Regulation	low line to high line, full load		1.2%/1% of Vin typ.
Load Regulation	10% to 100% load	3.3, 5VDC 9, 12, 15VDC	15% typ. 10% typ.

continued on next page


Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

Tolerance Envelope

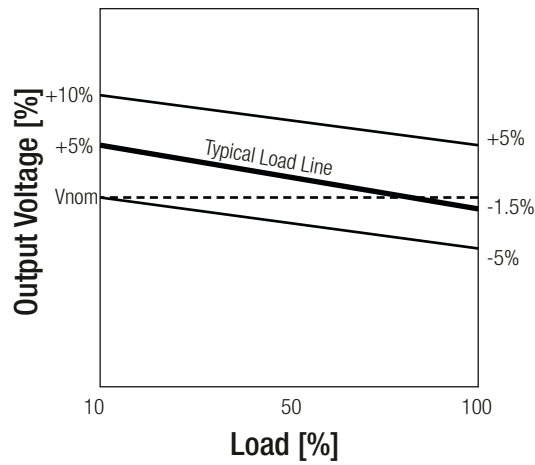


Deviation vs. Load


PxxP05S and PxxP09S

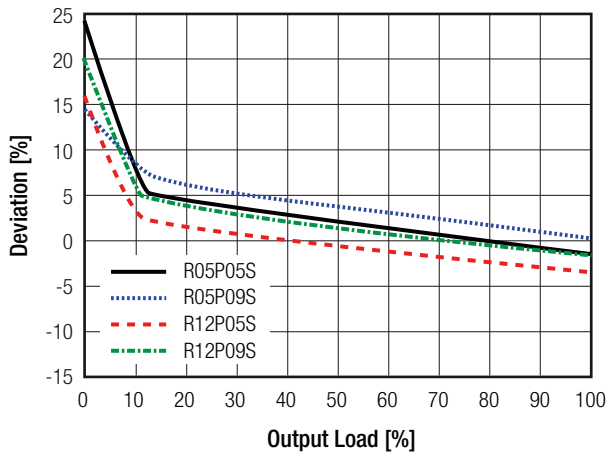


PxxP05D and PxxP09D

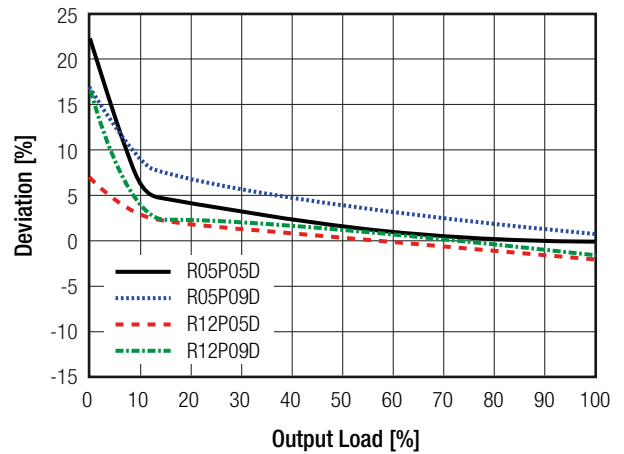

PxxP12S and PxxP15S

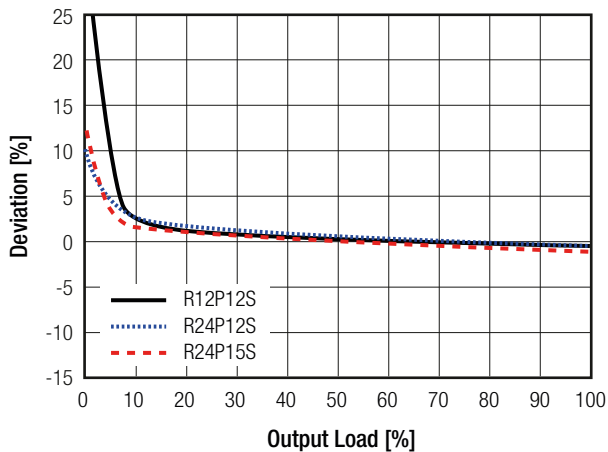

PxxP12D and PxxP15D

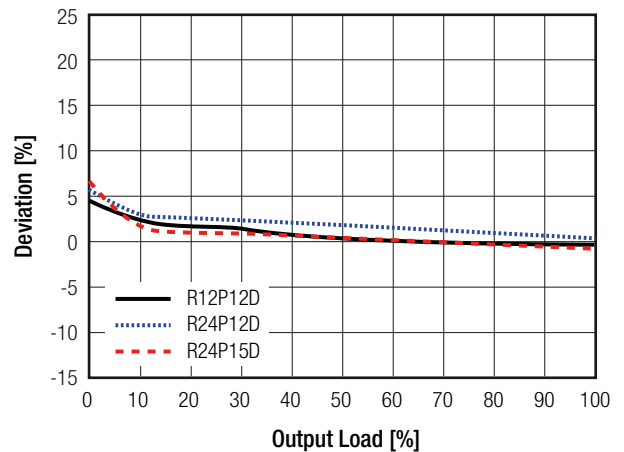


Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

PROTECTIONS		
Parameter	Type	Value
Short Circuit Protection (SCP)	without Suffix "/P" with Suffix "/P"	1 second continuous
Isolation Voltage ⁽⁷⁾	I/P to O/P	tested for 1 second
		rated for 1 minute
Isolation Resistance		6.4kVDC 3.2kVAC/60Hz
Isolation Capacitance		15GΩ min.
Insulation Grade		4.0pF min. / 10pF max.
Notes: Note7: For repeat Hi-Pot testing, reduce the time and/or the test voltage Note8: Refer to local wiring regulations if input over-current protection is also required. Recommended fuse: T1A slow blow type		

ENVIRONMENTAL		
Parameter	Condition	Value
Operating Temperature Range	without derating @ free air convection(see graph)	-40°C to +90°C
Operating Altitude		2000m
Operating Humidity	non-condensing	95% RH max.
Pollution Degree		PD2
MTBF	according to MIL-HDBK-217F, G.B.	+25°C
		+85°C
		2974 x 10 ³ hours 728 x 10 ³ hours

Derating Graph
(@ Chamber and free air convection)

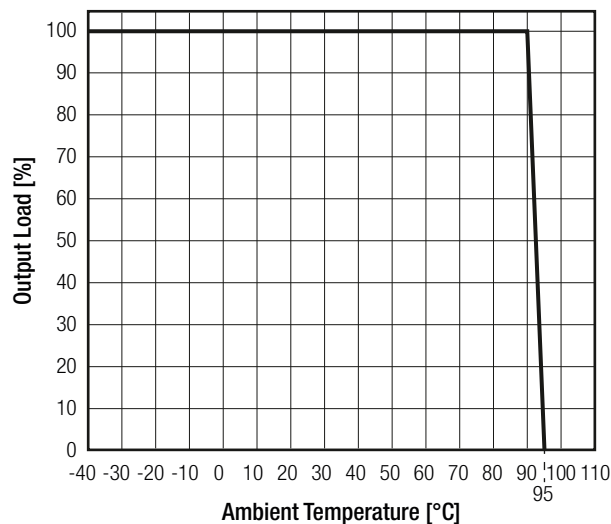


Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

SAFETY AND CERTIFICATIONS

Certificate Type (Safety)	Report / File Number	Standard
Information Technology Equipment, General Requirements for Safety	E224736-A56-UL	UL60950-1, 2nd Edition, 2014 CAN/CSA C22.2 No. 60950-1, 2nd Edition, 2014
Information Technology Equipment, General Requirements for Safety	SPCLVD1602031	EN60950-1:2006 +AM:2013 IEC60950-1:2005, 2nd Edition +AM:2013
Audio/video, information and communication technology equipment. Safety requirements	E224736-A56-UL	UL62368-1, 2nd Edition, 2014 CAN/CSA C22.2 No. 62368-1, 2nd Edition, 2014
Audio/video, information and communication technology equipment. Safety requirements	ATTCB106076	IEC62368-1:2014, 2nd Edition EN62368-1:2014 +A11:2017
EAC	RU-AT.49.09571	TP TC 004/2011
RoHS 2+		RoHS-2011/65/EU + AM2015/863

EMC Compliance	Condition	Standard / Criterion
Electromagnetic compatibility of multimedia equipment - Emission requirements	with external filter	EN55032, Class A/B

EMC Filtering Suggestions according to EN55032 Class A and Class B

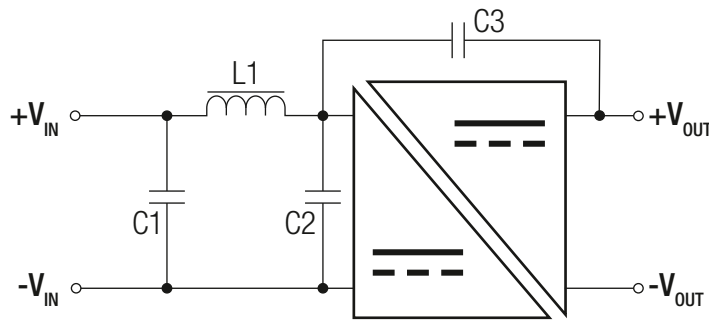

Component List Class A

C1	L1	C3
10µF 100V MLCC	-	-

Component List Class B


C1	C1	L1	C3
10µF 100V MLCC	10µF 100V MLCC	470µH choke WE 744 045 120	2n2F 8kV Vishay HGZ222MBP

DIMENSION AND PHYSICAL CHARACTERISTICS

Parameter	Type	Value
Material	case potting PCB	non-conductive black plastic, (UL94 V-0) silicon rubber compound, (UL94 V-0) FR4, (UL94 V-0)
Dimension (LxWxH)		19.5 x 9.8 x 12.5mm
Weight		4.3g typ.


continued on next page

Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

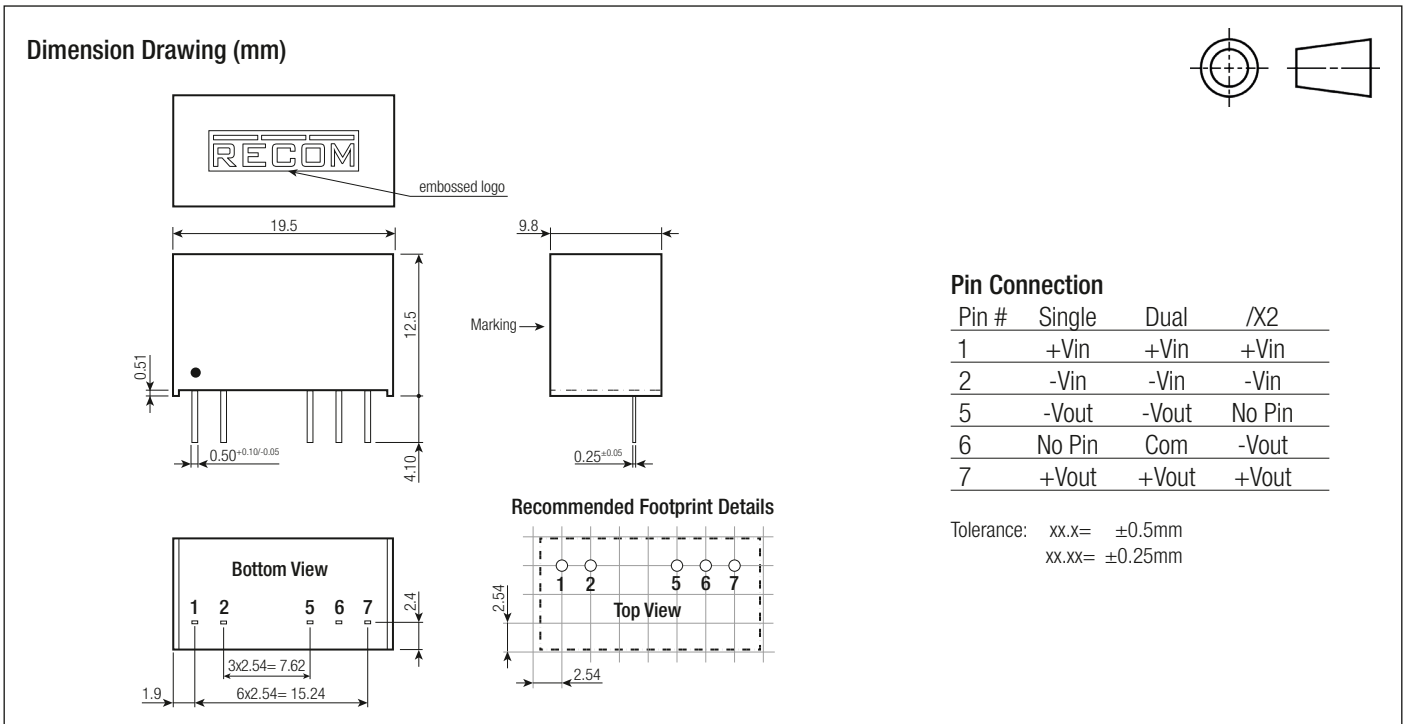

INSTALLATION AND APPLICATION

IGBT Application Circuit

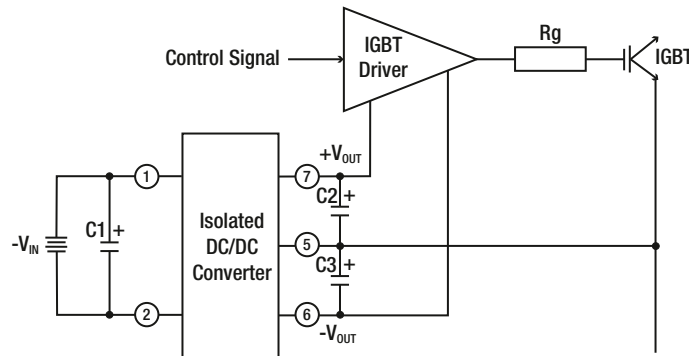

PACKAGING INFORMATION

Parameter	Type	Value
Packaging Dimension (LxWxH)	tube	520.0 x 22.3 x 12.0mm
Packaging Quantity	tube	25pcs
Storage Temperature Range		-55°C to +125°C
Storage Humidity		95% RH max.

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

RECOM:

[R05P05S](#) [R05P12S](#) [R12P12S](#) [R24P05S](#) [R24P12S](#) [R05P05D](#) [R05P05D/P](#) [R05P05S/P](#) [R05P09D](#) [R05P09D/P](#)
[R05P09S](#) [R05P09S/P](#) [R05P12D](#) [R05P12D/P](#) [R05P12S/P](#) [R05P15D](#) [R05P15D/P](#) [R05P15S](#) [R05P15S/P](#)
[R05P3.3D](#) [R05P3.3D/P](#) [R05P3.3S](#) [R05P3.3S/P](#) [R09P05D](#) [R09P05D/P](#) [R09P05S](#) [R09P05S/P](#) [R09P09D](#)
[R09P09D/P](#) [R09P09S](#) [R09P09S/P](#) [R09P12D](#) [R09P12D/P](#) [R09P12S](#) [R09P12S/P](#) [R09P15D](#) [R09P15D/P](#) [R09P15S](#)
[R09P15S/P](#) [R09P3.3D](#) [R09P3.3D/P](#) [R09P3.3S](#) [R09P3.3S/P](#) [R12P05D](#) [R12P05D/P](#) [R12P05S](#) [R12P05S/P](#)
[R12P09D](#) [R12P09D/P](#) [R12P09S](#) [R12P09S/P](#) [R12P12D](#) [R12P12D/P](#) [R12P12S/P](#) [R12P15D](#) [R12P15D/P](#) [R12P15S](#)
[R12P15S/P](#) [R12P3.3D](#) [R12P3.3D/P](#) [R12P3.3S](#) [R12P3.3S/P](#) [R15P05D](#) [R15P05D/P](#) [R15P05S](#) [R15P05S/P](#)
[R15P09D](#) [R15P09D/P](#) [R15P09S](#) [R15P09S/P](#) [R15P12D](#) [R15P12D/P](#) [R15P12S](#) [R15P12S/P](#) [R15P15D](#) [R15P15D/P](#)
[R15P15S](#) [R15P15S/P](#) [R15P3.3D](#) [R15P3.3D/P](#) [R15P3.3S](#) [R15P3.3S/P](#) [R24P05D](#) [R24P05D/P](#) [R24P05S/P](#)
[R24P09D](#) [R24P09D/P](#) [R24P09S](#) [R24P09S/P](#) [R24P12D](#) [R24P12D/P](#) [R24P12S/P](#) [R24P15D](#) [R24P15D/P](#) [R24P15S](#)
[R24P15S/P](#) [R24P3.3D](#) [R24P3.3D/P](#) [R24P3.3S](#) [R24P3.3S/P](#)